



FORMIKE ELECTRONIC CO.,LTD

PRDUCT SPECIFICATON

Color STN LCD MODULE

MODEL : KWH0151DN01-061A VER:A

【 】 Preliminary Specification

【 ◆】 Finally Specification

Prepared By :

FORMIKE ELECTRONIC CO.,LTD

Address : A909, Huaying Building,97 Nanshang Road,Nanshan Distrct, Shenzhen, China.518054

TEL:(86) 755 88306921,88306931 FAX:(86) 755 88304615

Http:// www.wandisplay.com

- This specification is subject to change withouth notice.Please contact FORMIKE or it's representative before designing your product based on this specification.

Issued Date : Apr-28-2007

Design Specification for Approval

Customer			
Product Model	KWH0151DN01-061A	REV.NO.	A
Designed by	Chang	Checked by	Fing
Approved by	Dan	Date	2007.04.28

Final Approval by Customer

Date:

Approved	Checked	Department

The specification of "TBD" should refer to the measured value of sample . If there is difference between the design specification and measured value, we naturally shall negotiate and agree to solution with customer. Formike Electronic Co.,Ltd reserve the right to make corrections, modifications,enhancements, improvements, and other changes to its products and services at any time and to discontinueany product or service without notice. Customers should obtain the latest relevant information before placingorders and should verify that such information is current and complete. All products are sold subject to Formike's terms and conditions of sale supplied at the time of order acknowledgment.

Contents

No.	Item	Page
1	Cover	1/20
2	Approve Sheet	2/20
3	Contents	3/20
4	Revision History	4/20
5	Scope	5/20
6	Normative Reference	5/20
7	Definitions	5/20
8	Technology Specifications	7/20
9	Circuit Block Diagram	11/20
10	Scheduling	12/20
11	Reliability Test Condition And Methods	13/20
12	Inspect Standard	14/20
13	Handing Precautions	17/20
14	Precaution For Use	19/20
15	Dimensional Outline	20/20

Revision History

Version	Contents	Date	Note
A	Original	Apr , 2007	

1. Scope

This specification applies to the color STN LCD module which is designed and manufactured by FORMIKE ELECTRONIC CO.,LTD

It is capable of using 8bits data bus and operating with 8080-series MPU. Also 65k , 262K、 16M colors mode can be selected by setting instruction.

2. Normative Reference

GB/T4619-1996 《 Liquid Crystal Display Test Method》

GB/T2424 《Basic environmental Testing Procedures for Electric and Electronic Products.》

GB/T2423 《Basic Testing Procedures for Electric and Electronic Products》
IEC61747-1 SIXTH PART

GB2828' 2829-87 《National Standard of PRC》

3. Definitions

3.1 Definition of Response Time T_r , T_d

T_r : The time required which the brightness of segment becomes 90% from 10% when waveform is switched to selected one from non-selected one.

($f_r=80\text{Hz}$, $\theta=10^\circ$ $\theta=270^\circ$ at 25)

T_d : The time required which the brightness of segment becomes 10% from 90% when waveform is switched to non-selected one from selected one.

($f_r=80\text{Hz}$, $\theta=10^\circ$ $\theta=270^\circ$ at 25)



3.2 Definition of Contrast Ratio C_r

$C_r=A/B$


A: Segments brightness in case of selected waveform

B: Segments brightness in case of non-selected waveform

3.3 Definition of Angle and Viewing Range

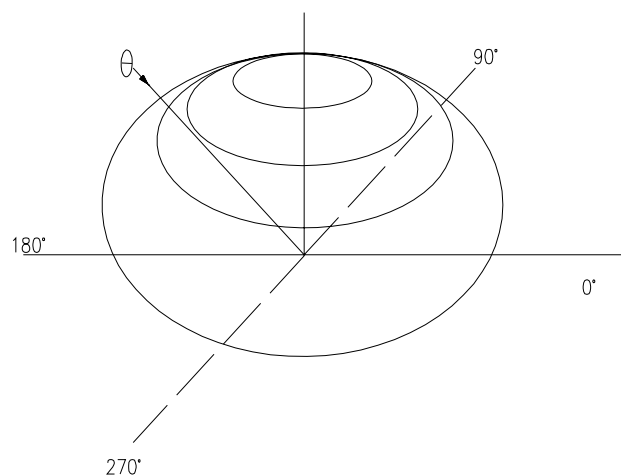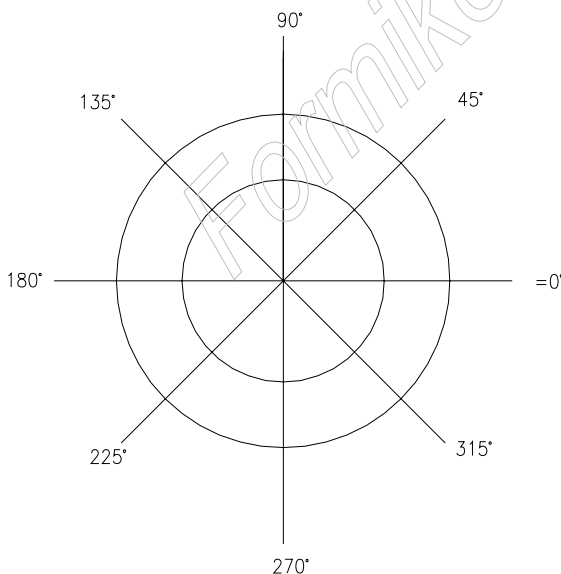

Angular Graph: Constrast Ratio

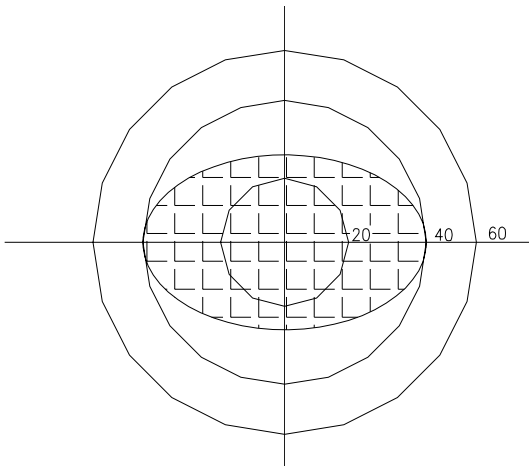

			Cr
Right	40 °	90 °	2
Left	40 °	270 °	
Front	35 °	0 °	
Back	35 °	180 °	

4. Technology Specifications

4.1 Feature

Item	Standard Value
Display Type	128(W) × RGB × 128(H)
LCD Type	CSTN Negative Transmissive
Drive Mothod	1/128 Duty 1/12 Bias
Screen Size	1.51 (Diagonal)
Viewing Direction	6 o'clock
Color configuration	R.G.B vertical stripe
Backlight type	White LED B/L
Interface	8-bit data bus
Drive IC	ST7637 (Support 65K)

4.2 Mechanical Specifications

Item	Specifications	Unit
Dimensional Outline	36.1(W) ×61.05(H)×3.0 (T)	mm
Number Of Dots	(128×3) (W) ×128(H)	Dots
Viewing Area	29.5(W) ×29.2(H)	mm
Active Area	27.254 (W) ×27.254 (H)	mm
Pixel Pitch	0.071(W) ×0.213(H)	mm
Dots Size	0.061(W) ×0.203(H)	mm

4.3 Absolute Max. Rating

Item	Symbol	Min	Max	Unit	Note
Supply voltage	Vdd	1.65	3.0	V	
Input Voltage	Vin	-0.3	Vdd+0.3	V	
Operating Temperature	Top	-20	70		
Storage Temperature	Tst	-30	80		
Humidity	HD-	20	90	%RH	

4.4 Optical Characteristics

Item	Symbol	Condition	Temp	Min	Typ	Max	Units
LCD driving voltage	Vlcd	= =0	25	---	14.00	---	V
Response Time	Rise Time (Tr)	= =0	0	---	---	---	msec
	Decay Time (Td)			---	---	---	
	Rise Time (Tr)		25	---	250	---	
	Decay Time (Td)			---	200	---	
	Rise Time (Tr)		50	---	---	---	
	Decay Time (Td)			---	---	---	
Contrast Ratio	Cr	= =0	25	15	20	---	---

Item		Symbol	Temp	Condition	Min	Typ	Max	Unit	Note
Color Of CIE Coordinate	White	x	25	=0 °	0.22	0.27	0.32	-	-
		y			0.23	0.28	0.33		
	Red	x			0.44	0.49	0.54		
		y			0.24	0.29	0.34		
	Green	x		=0 °	0.24	0.29	0.34		
		y			0.37	0.42	0.47		
	Blue	x		0.12	0.17	0.22			
		y		0.10	0.15	0.20			

4.5 Electrical Characteristics


4.5.1 Electrical Characteristics (VSS=0V,Vdd=2.3-3.0V,Ta=-20 to 70°C)

Item		Symbol	Condition	Min	Typ	Max	Unit	Note
Supply Voltage (Logic)		Vdd	-	2.3	2.8	3.0	V	
Input Voltage	“H” level	V _{IH}	VDD	0.7VDD	-	VDD	V	
	“L” level	V _{IL}	VSS	VSS	-	0.3VDD		
Output Voltage	“H” level	V _{OH}	0.8VDD	0.8VDD	-	VDD	V	
	“L” level	V _{OL}	VSS	VSS	-	0.2VDD		
Current Consumption (Main LCD)		I _{dd1}	Normal Mode	-	-	3.0	mA	

4.5.2 Interface Pin Connections

NO.	Symbol	Definition
1	LED-K	Power supply cathode input for backlight
2	LED+A	Power supply anode input for backlight
3	GND	Ground
4	VDD	Power supply input for drive IC
5	NC	No connection
6	NC	No connection
7	CSB	Chip select pin
8	RESB	Reset signal input pin
9	A0	Date and control register select input
10	WR	Write signal input
11	RD	Read signal input
12	DB7	8-bit bi-directional data bus
13	DB6	8-bit bi-directional data bus
14	DB5	8-bit bi-directional data bus
15	DB4	8-bit bi-directional data bus
16	DB3	8-bit bi-directional data bus
17	DB2	8-bit bi-directional data bus
18	DB1	8-bit bi-directional data bus
19	DB0	8-bit bi-directional data bus
20	GND	Power supply input for drive IC


5.Circuit Block Diagram

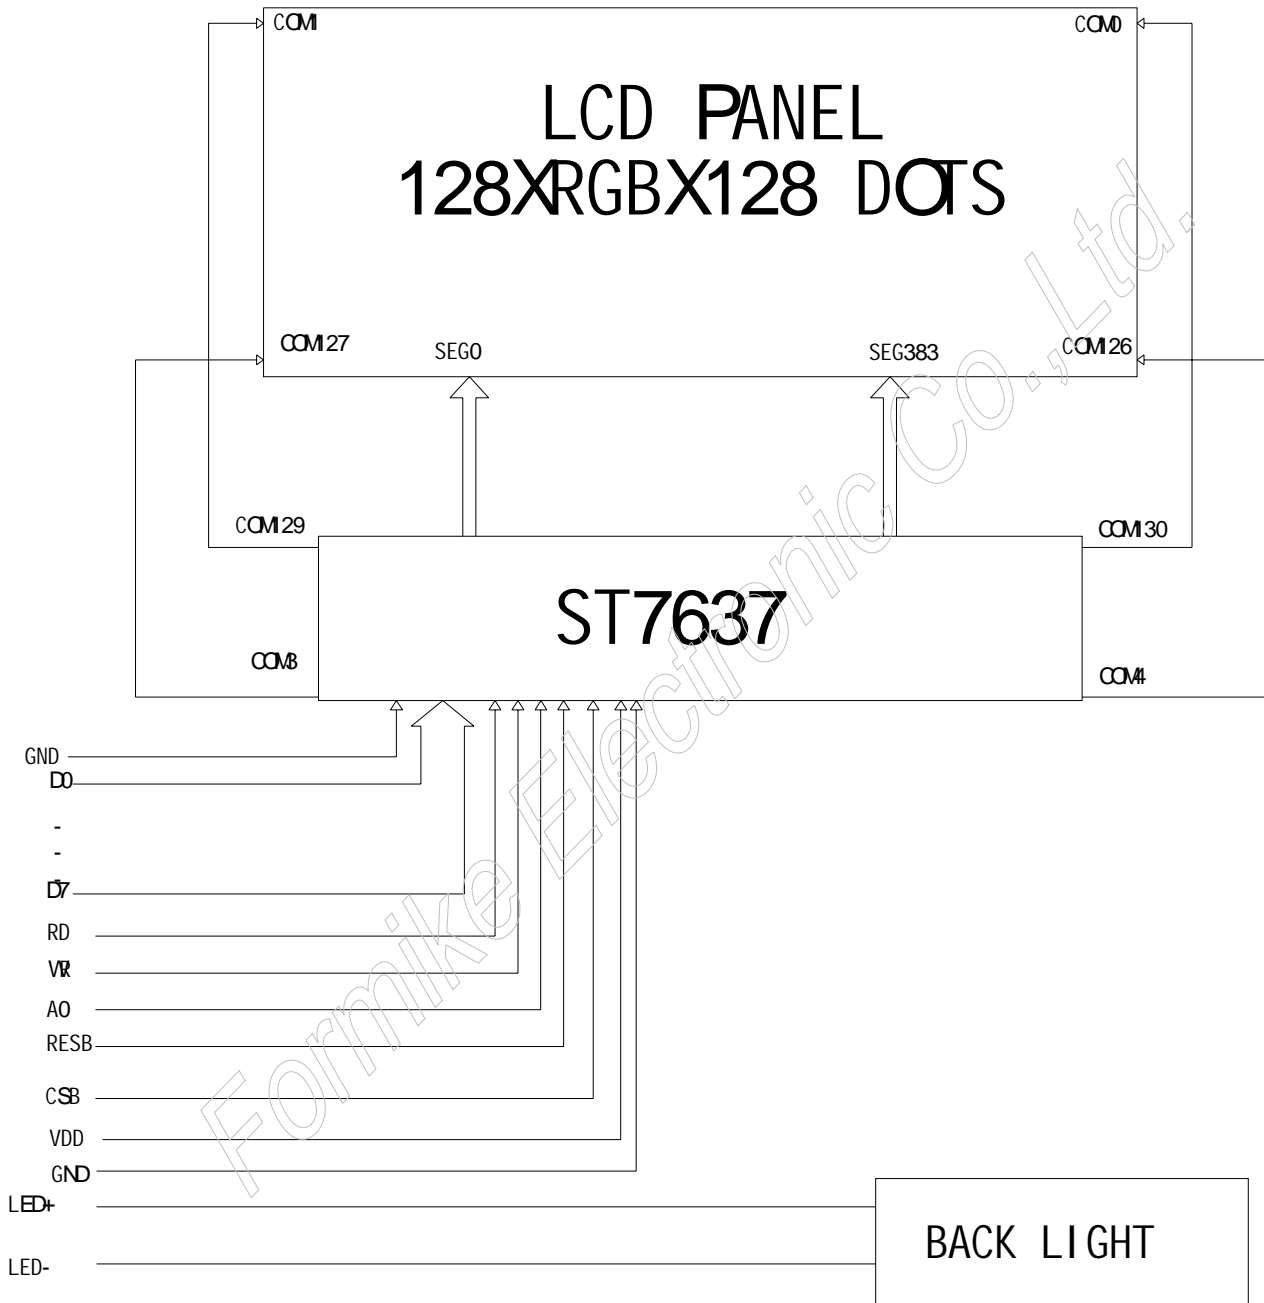

6. Scheduling

ST7637 Scheduling


● Read/write Characteristics (8080-series Parallel mode)

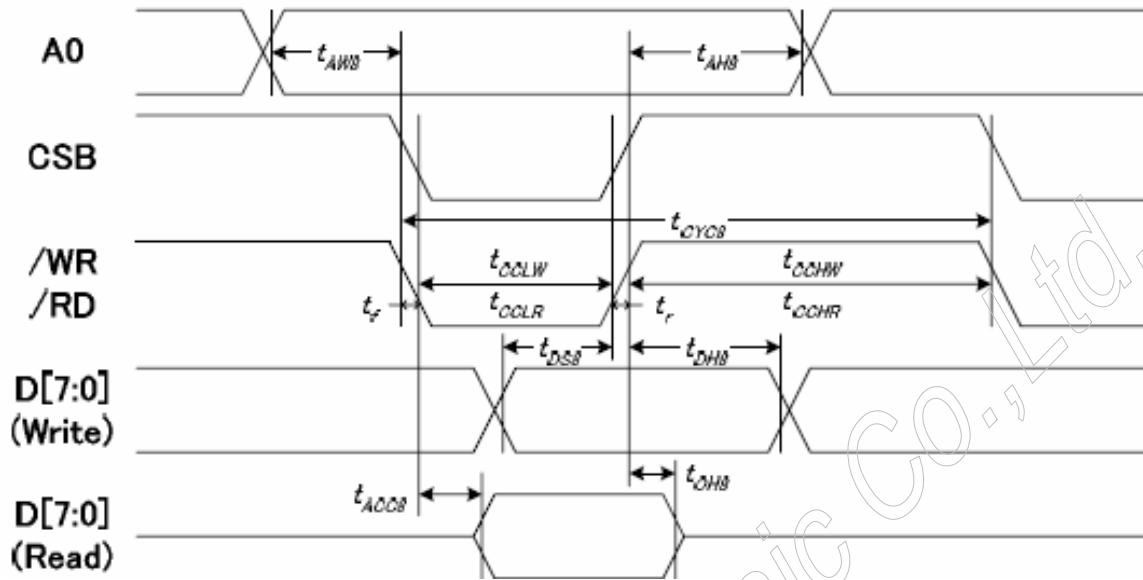

(V_{DD}=2.8V, Ta= -30°C to 85°C, die)

Item	Signal	Symbol	Condition	Rating		Units
				Min.	Max.	
Address hold time	A0	tAH8		15	—	ns
Address setup time		tAW8		15	—	
System cycle time (WRITE)	WR	tCYC8		170	—	ns
/WR L pulse width (WRITE)		tCCLW		50	—	
/WR H pulse width (WRITE)		tCCHW		100	—	
System cycle time (READ)	RD (ID)	tCYC8		60	—	ns
/RD L pulse width (READ)		tCCLR	When read ID data	40	—	
/RD H pulse width (READ)		tCCHR		20	—	
System cycle time (READ)	RD (FM)	tCYC8	When read from frame memory	180	—	ns
/RD L pulse width (READ)		tCCLR		55	—	
/RD H pulse width (READ)		tCCHR		90	—	
WRITE data setup time	D0 to D7	tDS8		50	—	ns
WRITE data hold time		tDH8		10	—	
READ access time (ID)		tACC8 (ID)		—	50	
READ access time (FM)		tACC8 (FM)	CL = 100 pF	—	70	
READ Output disable time		tOH8	CL = 100 pF	—	60	

Reset Input Timing

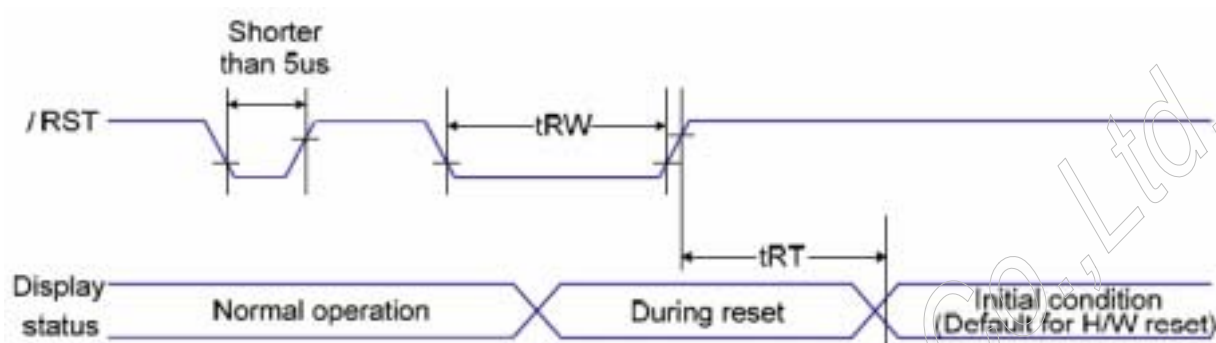

Item	Signal	Symbol	Condition	Rating		Units
				Min	Max	
Reset " L " pulse width	/RST	tRW		10	---	us
Reset time		tRT		---	5	ms
				---	120	ms

7. Reliability Test Conditions And Methods



No.	Test item	Test Condition	Inspection after test
1	High Temperature Storage	80 ± 2 96h	No Defect of operational function in room temperature are allowable. IDD of LCM in pre-and post-test should follow specification
2	Low Temperature Storage	-30 ± 2 96h	
3	High Temperature operating	70 ± 2 96h	
4	Low Temperature operating	-20 ± 2 96h	
5	High Temperature, High Humidity Operating	50 90% RH, 96h	
6	Temperature Cycle	Endurance test applying the low and high temperature cycle 	

Notes:

1. Judgments should be made after exposure in room temperature for two hours.
2. The distill water is used for the high tempetature/humidity test.
3. The sample above is individually for every reliability tests condition.



8. Inspection standard

8.1 Visual inspection criterion in cosmetic Glass defect

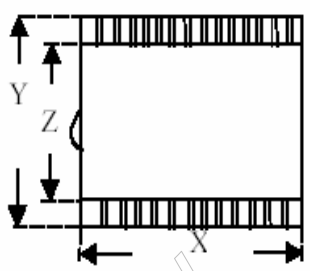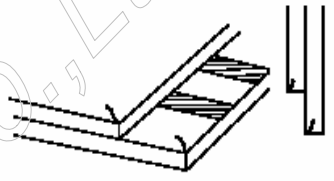No	Item	Criteria	Remark/fig	
1	Dimension Unconformity (major)	By Engineering Drawing		
2	Cracks (Major)	Linear cracks on panel 【Reject】 Nonlinear crack contrast with broken specification		
3	Glass broken (Minor)	More than one-eighths of length or width of glass 【Reject】		
4	The height, width and deviation of end seal (Minor)	By engineering Drawing		
5	The leakage of end-seal (Minor)	The leakage of end-seal exceeds the view area. 【Reject】		
6	Black dots, Dirty dots, impurities, Polarizer prick (Major)	Spec	Permissible Qty	1: $\phi = (L+W)/2$,L= Length , W= Width 2:Disregard if out of AA 3:Distance between two dots >5mm
		$\phi \leq 0.1\text{mm}$	Disregard	
		$\phi \leq 0.25\text{mm}$	2	
7	Fiber, scratch, polarizer folded	Spec	Permissible Qty	1: L =Length , W= Width 2:Less than 2 per cm^2

No	Item	Criteria	Remark/fig								
		<table border="1"> <tr> <td>$L \leq 3\text{mm}$ and $W \leq 0.02\text{mm}$</td> <td>Disregard</td> </tr> <tr> <td>$L \leq 3\text{mm}$ and $W \leq 0.03\text{mm}$</td> <td>3</td> </tr> <tr> <td>$L \leq 3\text{mm}$ and $W \leq 0.05\text{mm}$</td> <td>1</td> </tr> <tr> <td>$L > 3\text{mm}$ or $W > 0.05\text{mm}$</td> <td>0</td> </tr> </table>	$L \leq 3\text{mm}$ and $W \leq 0.02\text{mm}$	Disregard	$L \leq 3\text{mm}$ and $W \leq 0.03\text{mm}$	3	$L \leq 3\text{mm}$ and $W \leq 0.05\text{mm}$	1	$L > 3\text{mm}$ or $W > 0.05\text{mm}$	0	3: Disregard if out of AA
$L \leq 3\text{mm}$ and $W \leq 0.02\text{mm}$	Disregard										
$L \leq 3\text{mm}$ and $W \leq 0.03\text{mm}$	3										
$L \leq 3\text{mm}$ and $W \leq 0.05\text{mm}$	1										
$L > 3\text{mm}$ or $W > 0.05\text{mm}$	0										
8	Polarizer concave and convex, bubble (Major)	<table border="1"> <tr> <td>Spec</td> <td>Permissible Qty</td> </tr> <tr> <td>$\psi \leq 0.3\text{mm}$</td> <td>Disregard</td> </tr> <tr> <td>$0.3\text{mm} < \psi \leq 0.7\text{mm}$</td> <td>1</td> </tr> <tr> <td>$0.7\text{mm} < \psi$</td> <td>0</td> </tr> </table>	Spec	Permissible Qty	$\psi \leq 0.3\text{mm}$	Disregard	$0.3\text{mm} < \psi \leq 0.7\text{mm}$	1	$0.7\text{mm} < \psi$	0	<p>1: $\psi = (L+W)/2$: L=Length · W=Width</p> <p>2: Define by customer if out of AA</p> <p>3: Distance between two spots >5mm</p> <p>4 Less than 3 per cm^2</p>
Spec	Permissible Qty										
$\psi \leq 0.3\text{mm}$	Disregard										
$0.3\text{mm} < \psi \leq 0.7\text{mm}$	1										
$0.7\text{mm} < \psi$	0										
9	Polarizer shift (Minor)	<p>1.The bulge over glass side more than 0.2mm 【Reject】</p> <p>2.The recess exceeds 1.4mm 【Reject】</p> <p>3.Front or rear polarizer overtop the top glass area 【Reject】</p> <p>4. Inner frame of sealant invisible after polarizer attached 【Reject】</p>	<p>Remark:</p> <p>1: Measure from the side of panel</p> <p>2. Abide by this criteria if no relevant engineering drawing provided</p>								
10	Protecting film peels off on polarizer. (Minor)	<p>1. Turnup of protecting film >1/3of the length or width of its corresponding axis. 【Reject】</p> <p>2. Turnup of protecting film >15mm 【Reject】</p>	Except for special requirements								
11	Glue covering (Minor)	No fully covering of IC,ITO and conductive line area 【Reject】									
12	Depth of glue covering (Minor)	Depth of glue covering overtop front Polarizer 【Reject】									

8.2 Electrical criteria

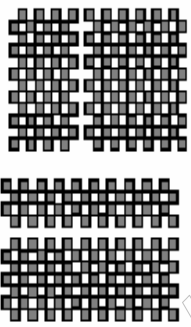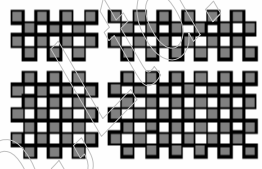No	Item	Criteria		Remark
1	Missing line (Major)	Missing line	【Reject】	
2	Short cut (Major)	Short cut	【Reject】	
3	Pattern blur ,error code (Major)	Pattern blur ,error code	【Reject】	
4	No display in immobility (Major)	No display in immobility	【Reject】	
5	Flicker of Pattern (Major)	Flicker of Pattern	【Reject】	
6	IDD , Voltage Over (Major)	By engineering specification	【Reject】	
7	Dark light, Flicker (Major)	Dark light, Flicker	【Reject】	
8	Black/White, dirty dots, impurities (Major)	Spec	Permissible Qty	1: $\phi = (L+W)/2$; L=Length , W=width 2: Disregard if out of A.A 3: Distance between two dots >5mm 3: Inspection by RGB pattern
		$\phi \leq 0.1\text{mm}$	Disregard	
		$\phi \leq 0.25\text{mm}$	2	

No	Item	Criteria	Remark
9	White pellet (Minor)	By limited sample	1: $\phi = (L+W)/2$: L=Length W=Width 2: Disregard if out of AA 3: Distance between two dots >5mm 4: Inspection by RGB pattern
10	Diagonal (Minor)	Not allowed in RGB pattern	
11	Light line Caused by Spacer gather (Minor)	By limited sample	1: Inspection by RGB pattern
12	Display Mura (Minor)	By limited sample	
13	Cross talk (Minor)	By limited sample	
14	Strip Mura (Minor)	By limited sample	

9 Handling Precautions

9.1 Mounting method

The LCD panel of Formike's LCD module consists of two thin glass plates with polarizers which easily be damaged. And since the module is so constructed as to be fixed by utilizing fitting holes in the printed circuit board.

Extreme care should be needed when handling the LCD modules.

9.2 Caution of LCD handling and cleaning

When cleaning the display surface, Use soft cloth with solvent

[recommended below] and wipe lightly

- Isopropyl alcohol
- Ethyl alcohol

Do not wipe the display surface with dry or hard materials that will damage the polarizer surface.

Do not use the following solvent:

- Water
- Aromatics

Do not wipe ITO pad area with the dry or hard materials that will damage the ITO patterns

Do not use the following solvent on the pad or prevent it from being contaminated:

- Soldering flux
- Chlorine (Cl) , Salfur (S)

If goods were sent without being sili8con coated on the pad, ITO patterns could be damaged due to the corrosion as time goes on.

If ITO corrosion happen by miss-handling or using some materials such as Chlorine (Cl), Salfur (S) from customer, Responsibility is on customer.

9.3 Caution against static charge

The LCD module use C-MOS LSI drivers, so we recommended that you:

Connect any unused input terminal to Vdd or Vss, do not input any signals before power is turned on, and ground your body, work/assembly areas, assembly equipment to protect against static electricity.

9.4 packing

- Module employ LCD elements and must be treated as such.
- Avoid intense shock and falls from a height.
- To prevent modules from degradation, do not operate or store them exposed direct to sunshine or high temperature/humidity

9.5 Caution for operation

- It is an indispensable condition to drive LCD's within the specified voltage limit since the higher voltage then the limit cause the shorter LCD life.
- An electrochemical reaction due to direct current causes LCD's undesirable deterioration, so that the use of direct current drive should be avoided.
- Response time will be extremely delayed at lower temperature then the operating temperature range and on the other hand at higher temperature LCD's how dark color in them. However those phenomena do not mean malfunction or out of order with LCD's, which will come back in the specified operation temperature.
- If the display area is pushed hard during operation, some font will be abnormally displayed but it resumes normal condition after turning off once.
- A slight dew depositing on terminals is a cause for electro-chemical reaction resulting in terminal open circuit.

Usage under the maximum operating temperature, 50%Rh or less is required.

9.6 storage

In the case of storing for a long period of time for instance, for years for the purpose or replacement use, the following ways are recommended.

- Storage in a polyethylene bag with the opening sealed so as not to enter fresh air outside in it .

And with no desiccant.

- Placing in a dark place where neither exposure to direct sunlight nor light's keeping the storage temperature range.
- Storing with no touch on polarizer surface by the anything else.

[It is recommended to store them as they have been contained in the inner container at the time of delivery from us

9.7 Safety

- It is recommendable to crash damaged or unnecessary LCD's into pieces and wash off liquid crystal by either of solvents such as acetone and ethanol, which should be burned up later.
- When any liquid leaked out of a damaged glass cell comes in contact with your hands, please wash it off well with soap and water

10 . Precaution for use

10.1


A limit sample should be provided by the both parties on an occasion when the both parties agreed its necessity. Judgment by a limit sample shall take effect after the limit sample has been established and confirmed by the both parties.

10.2

On the following occasions, the handing of problem should be decided through discussion and agreement between responsible of the both parties.

- When a question is arisen in this specification
- When a new problem is arisen which is not specified in this specifications
- When an inspection specifications change or operating condition change in customer is reported to Lanser , and some problem is arisen in this specification due to the change
- When a new problem is arisen at the customer's operating set for sample evaluation in the customer site.

11. Dimensional Outline

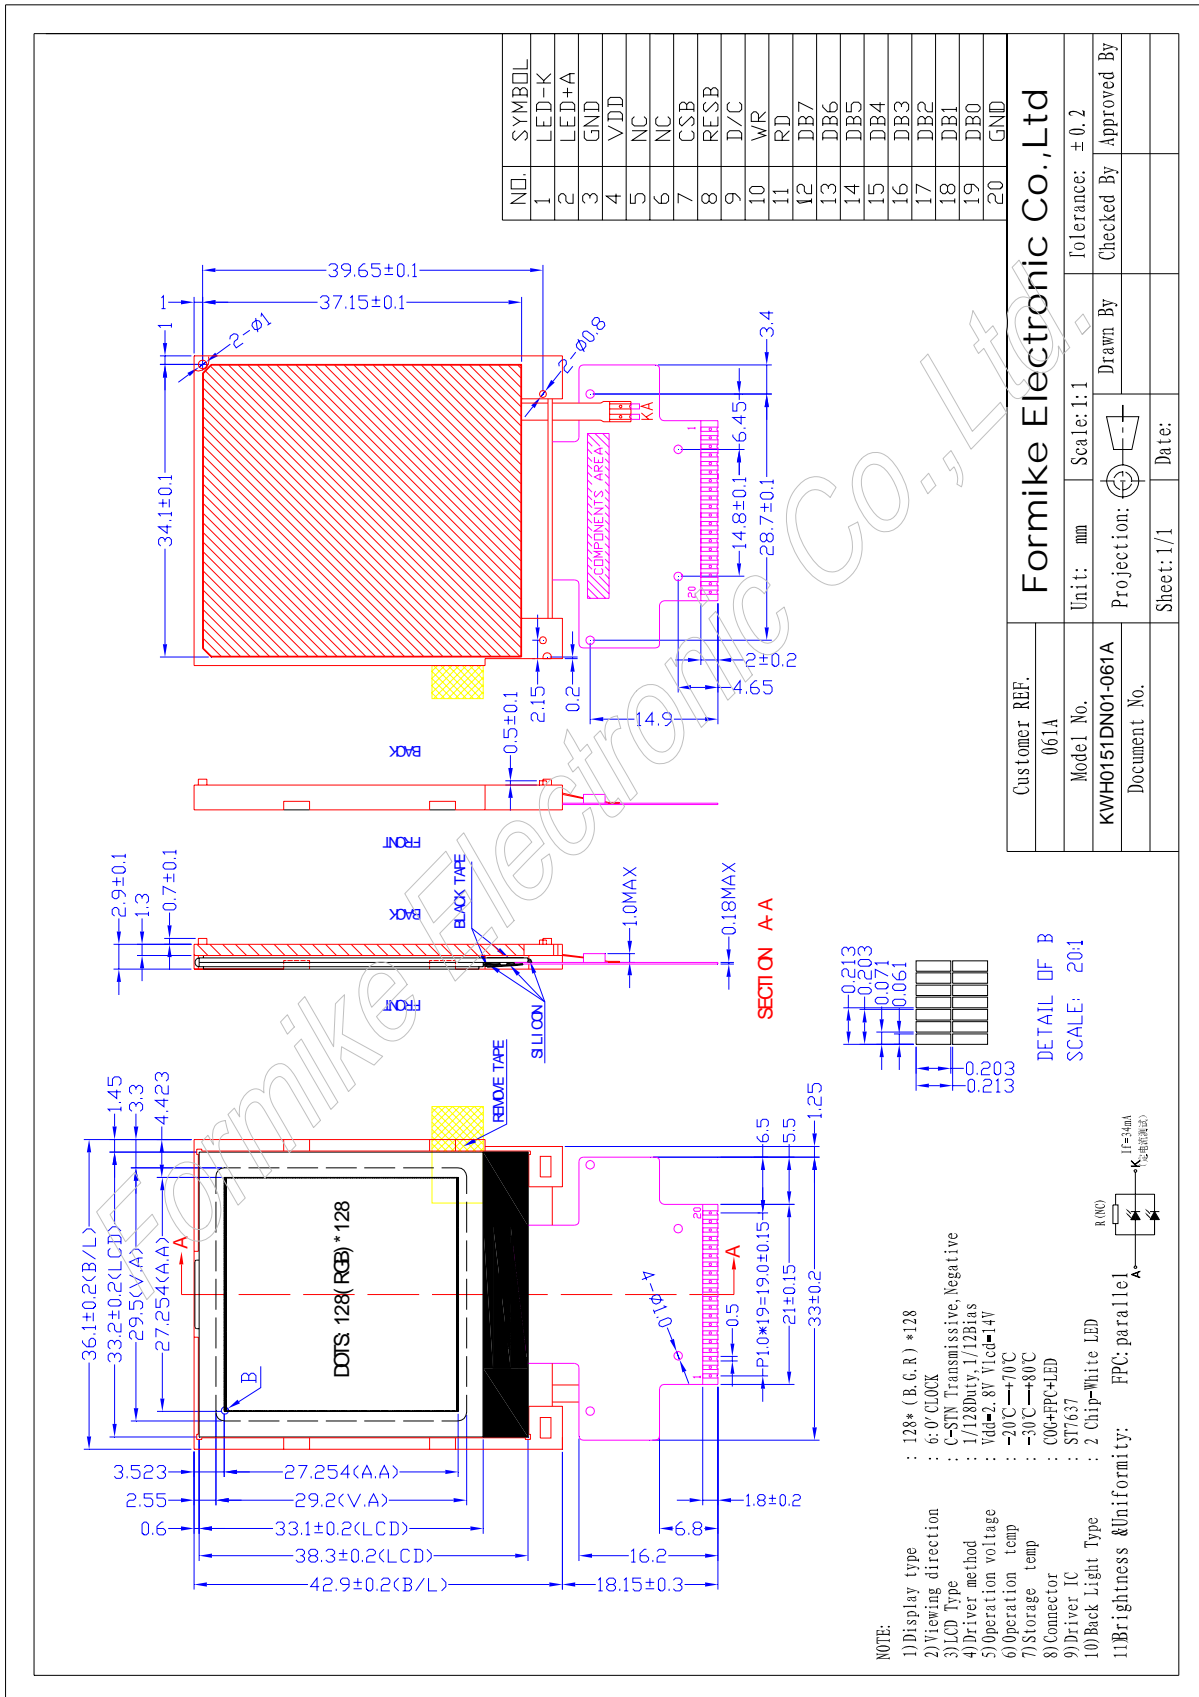

Formike Electronic Co.,Ltd

Customer REF. : 061A
 Model No. : KWH0151DN01-061A
 Document No. :
 Unit: mm
 Scale: 1:1
 Projection:
 Sheet: 1/1
 Date:
 Tolerance: ±0.2
 Checked By
 Drawn By
 Approved By