



MULTI-INNO TECHNOLOGY CO., LTD.

www.multi-inno.com

LCD MODULE SPECIFICATION

Model : MI0700XT-11


This module uses ROHS material

For Customer's Acceptance:

Customer	
Approved	
Comment	

This specification may change without prior notice in order to improve performance or quality. Please contact Multi-Inno for updated specification and product status before design for this product or release of this order.

Revision	1.0
Engineering	
Date	2013-08-15
Our Reference	





CONTENTS

- GENERAL INFORMATION
- EXTERNAL DIMENSIONS
- ABSOLUTE MAXIMUM RATINGS
- ELECTRICAL CHARACTERISTICS
- BACKLIGHT CHARACTERISTICS
- ELECTRO-OPTICAL CHARACTERISTICS
- INTERFACE DESCRIPTION
- TOUCH SCREEN PANEL SPECIFICATIONS
- APPLICATION NOTES
- RELIABILITY TEST
- INSPECTION CRITERION
- PRECAUTIONS FOR USING LCD MODULES
- USING LCD MODULES
- PRIOR CONSULT MATTER

**■ GENERAL INFORMATION**


Item	Contents	Unit/note
LCD type	TFT/Transmissive/Normally white	/
Size	7.0	Inch
Viewing direction	12:00	O ' Clock
Gray scale inversion direction	6:00	O ' Clock
Module area (W × H x D)	165.75 × 105.39 × 6.00	mm ³
Active area (W×H)	153.60×90.00	mm ²
Dot pitch (W × H)	0.05 × 0.15	mm ²
Number of Dots	1024×(3RGB) × 600	/
Surface treatment	Glare	/
Color arrangement	RGB-stripe	/
Colors	16.7M	/
Backlight Type	LED	/
Interface Type	LVDS	/
Input voltage	3.3	V
Panel Power consumption	0.35	W
Backlight Power consumption	3.564	W
Module weight	TBD	g
With/Without TSP	With TSP	/

Note 1:Viewing direction for best image quality is different from TFT definition, there is a 180 degree shift.

Note 2 : RoHS compliant;

Note 3: LCM weight tolerance: ± 5% .

■ EXTERNAL DIMENSIONS

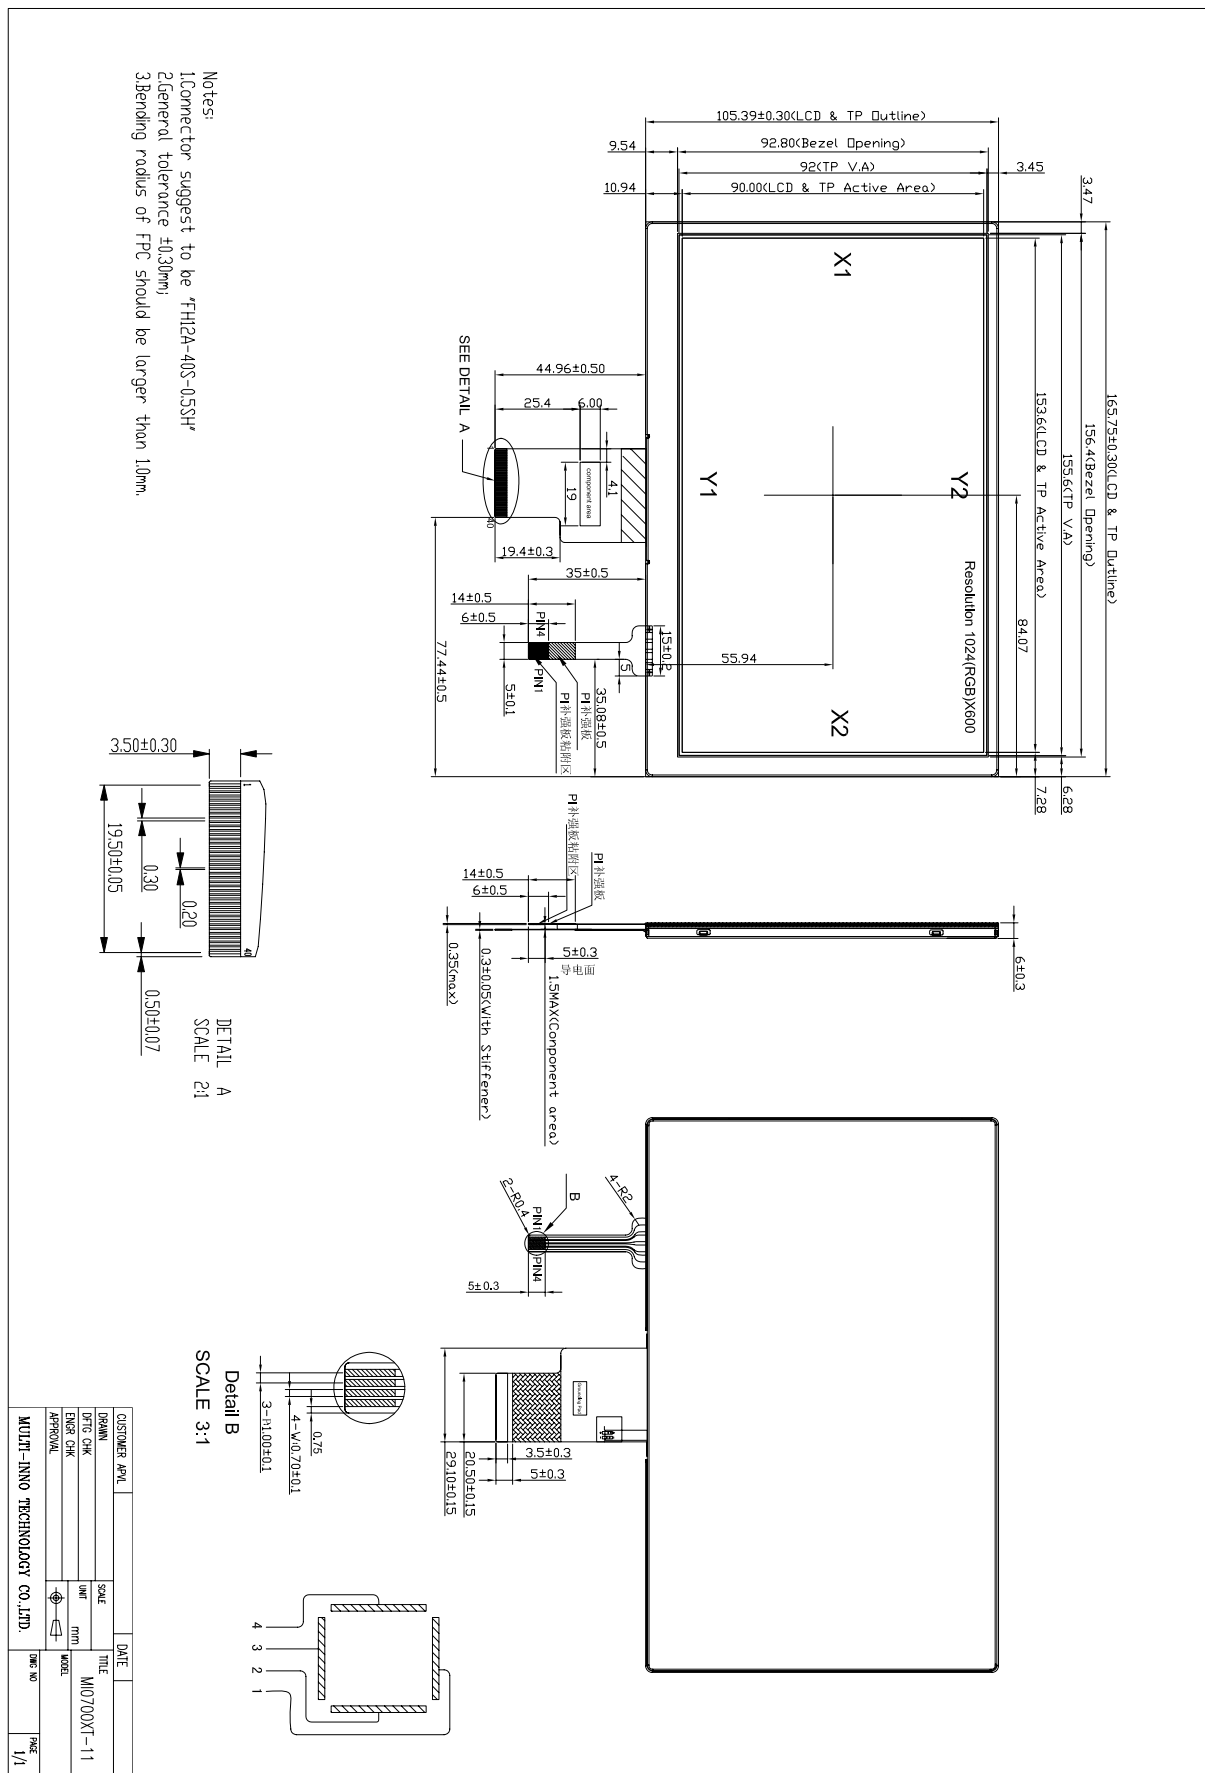



■ ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Min	Max	Unit
Power supply voltage	DVDD	-0.3	5.0	V
	AVDD	6.5	13.5	V
	VGH	-0.3	42.0	V
	VGL	-20.0	0.3	V
	VGH-VGL	-	40.0	V
Operating temperature	Top	-20	70	°C
Storage temperature	TST	-30	80	°C
Humidity	RH	-	90%(Max60 °C)	RH
LED reverse voltage (each led)	VR	-	5	V
LED forward current(each led)	IF	-	60	mA

Note 1: The absolute maximum rating values of this product are not allowed to be exceeded at any times. Should a module be used with any of the absolute maximum ratings exceeded, the characteristics of the module may not be recovered, or in an extreme case, the module may be permanently destroyed.

■ ELECTRICAL CHARACTERISTICS

DC CHARACTERISTICS


Parameter	Symbol	Min	Typ	Max	Unit
Supply Voltage	DVDD	3.0	3.3	3.6	V
	VGH	19.7	20.0	20.3	V
	VGL	-6.5	-6.8	-7.1	V
	AVDD	10.8	11	11.2	V
VCOM	VCOM	2.7	3.7	4.7	V
Input voltage 'H' level	VIH	0.7DVDD	-	DVDD	V
Input voltage 'L' level	VIL	0	-	0.3DVDD	V

DD and V_{GL} to the LCD first, and then apply V_{GH}

Note 2: DV_{DD} setting should match the signals output voltage (refer to Note 3) of customer's system board.

Note 3: LVDS, Reset.

V_{COM} is only a reference value, it must be optimized according to each LCM.
Be sure to use VR;

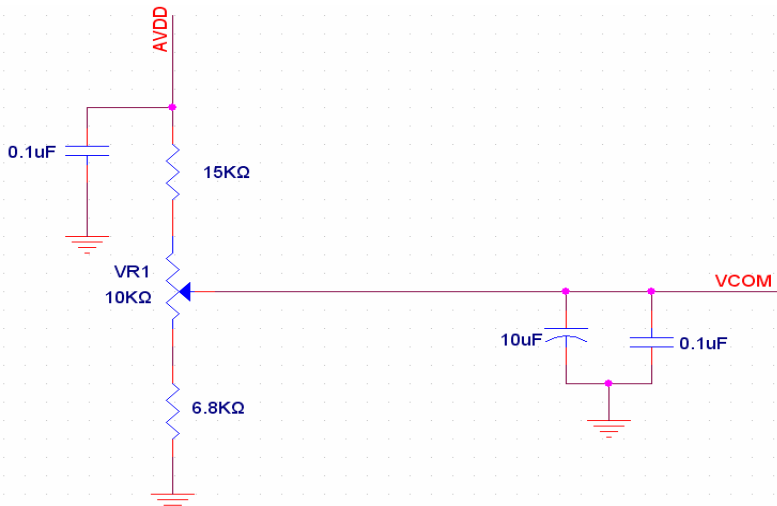

**CURRENT CONSUMPTION**

Item	Symbol	Min.	Typ.	Max.	Unit	Remark
Current for driver	I _{GH}	-	0.25	1	mA	V _{GH} =20.0V
	I _{GL}	-	0.25	1	mA	V _{GL} =-6.8V
	IDV _{DD}	-	38	60	mA	DV _{DD} =3.3V
	IAV _{DD}	-	20	30	mA	AV _{DD} =11.0V

■ BACKLIGHT CHARACTERISTICS

Item	Symbol	Min.	Typ.	Max.	Unit	Condition
Voltage for LED backlight	V _L	-	9.9	10.5	V	Note 1
Current for LED backlight	I _L	-	360	420	mA	
LED life time	-	-	20,000	-	Hrs	Note 2

Note 1: The LED Supply Voltage is defined by the number of LED at Ta=25℃ and I_L=360mA.

Note 2: The “LED life time” is defined as the module brightness decrease to 50% original brightness at Ta=25℃ and I_L=360mA. The LED lifetime could be decreased if operating I_L is larger than 360mA.

■ ELECTRO-OPTICAL CHARACTERISTICS

Item of electro-optical characteristics	Symbol	Condition	Min	Typ	Max	Unit	Remark	Note
Response time	Tr+Tf	$\theta=0^\circ$ $\varnothing=0^\circ$ $T_a=25^\circ\text{C}$	-	25	50	--	FIG 1.	4
Contrast ratio	Cr		500	700	-	--	FIG 2.	1
Luminance uniformity	δ WHITE		70	75	-	%	FIG 2.	3
Surface Luminance	Lv		310	390	-	cd/m ²	FIG 2.	2
Viewing angle range	θ	$\varnothing = 90^\circ$	60	70	-	deg	FIG 3.	6
		$\varnothing = 270^\circ$	65	75	-	deg	FIG 3.	
		$\varnothing = 0^\circ$	65	75	-	deg	FIG 3.	
		$\varnothing = 180^\circ$	65	75	-	deg	FIG 3.	
CIE (x, y) chromaticity	Red x	$\theta=0^\circ$ $\varnothing=0^\circ$ $T_a=25^\circ\text{C}$	-	-	-	-	FIG 2.	5
	Red y		-	-	-	-		
	Green x		-	-	-	-		
	Green y		-	-	-	-		
	Blue x		-	-	-	-		
	Blue y		-	-	-	-		
	White x		0.260	0.310	0.360	-		
	White y		0.280	0.330	0.380	-		

Note1. Contrast Ratio(CR) is defined mathematically by the following formula. For more information see FIG 2.:

$$\text{Contrast Ratio} = \frac{\text{Average Surface Luminance with all white pixels (P1, P2, P3, P4, P5)}}{\text{Average Surface Luminance with all black pixels (P1, P2, P3, P4, P5)}}$$

Note2. Surface luminance is the LCD surface from the surface with all pixels displaying white. For more information see FIG 2.

$$L_v = \text{Average Surface Luminance with all white pixels (P1, P2, P3, P4, P5)}$$

Note3. The uniformity in surface luminance (δ WHITE) is determined by measuring luminance at each test position 1 through 5, and then dividing the maximum luminance of 5 points luminance by minimum luminance of 5 points luminance. For more information see FIG 2.

$$\delta \text{ WHITE} = \frac{\text{Minimum Surface Luminance with all white pixels (P1, P2, P3, P4, P5)}}{\text{Maximum Surface Luminance with all white pixels (P1, P2, P3, P4, P5)}}$$

Note4. Response time is the time required for the display to transition from White to black(Rise Time, Tr) and from black to white(Decay Time, Tf). For additional information see FIG 1..

Note5. CIE (x, y) chromaticity, The x,y value is determined by screen active area position 5. For more information see FIG 2.

Note6. Viewing angle is the angle at which the contrast ratio is greater than 2. For TFT module the contrast ratio is greater than 10. The angles are determined for the horizontal or x axis and the vertical or y axis with respect to the z axis which is normal to the LCD surface. For more information see FIG 3.

Note7. For Viewing angle and response time testing, the testing data is base on Autronic-Melchers's ConoScope. Series Instruments. For contrast ratio, Surface Luminance, Luminance uniformity and CIE, the testing data is base on TOPCON's BM-5 photo detector.

Note8. For TFT module, Gray scale reverse occurs in the direction of panel viewing angle

FIG.1. The definition of Response Time

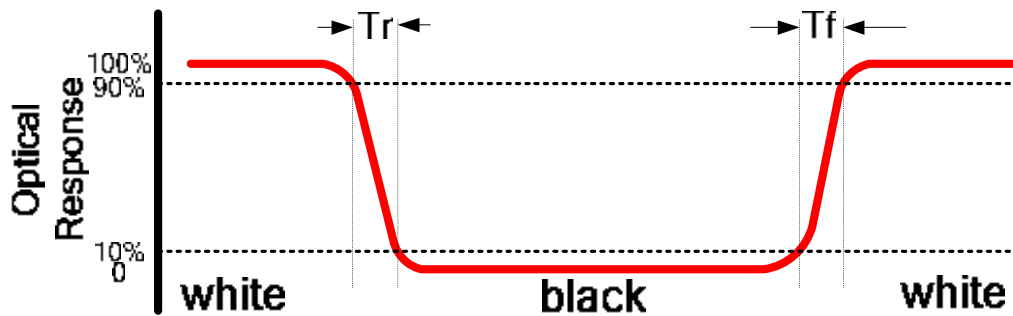


FIG.2. Measuring method for Contrast ratio, surface luminance, Luminance uniformity, CIE (x, y) chromaticity

A : 5 mm
B : 5 mm
H, V : Active Area
Light spot size $\varnothing=5\text{mm}$, 500mm distance from the LCD surface to detector lens
measurement instrument is TOPCON's luminance meter BM-5


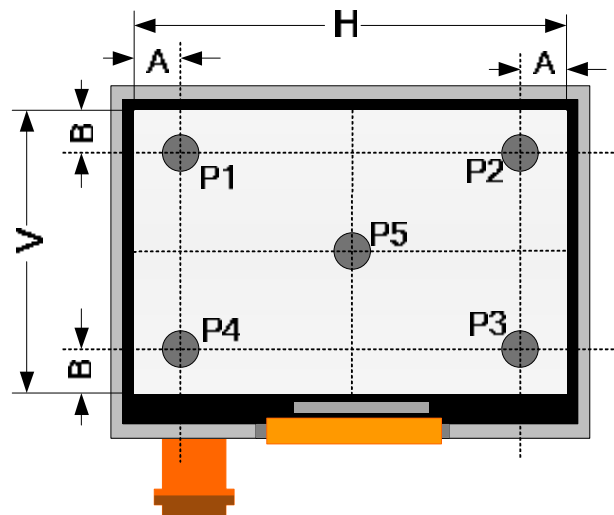


FIG.3. The definition of viewing angle



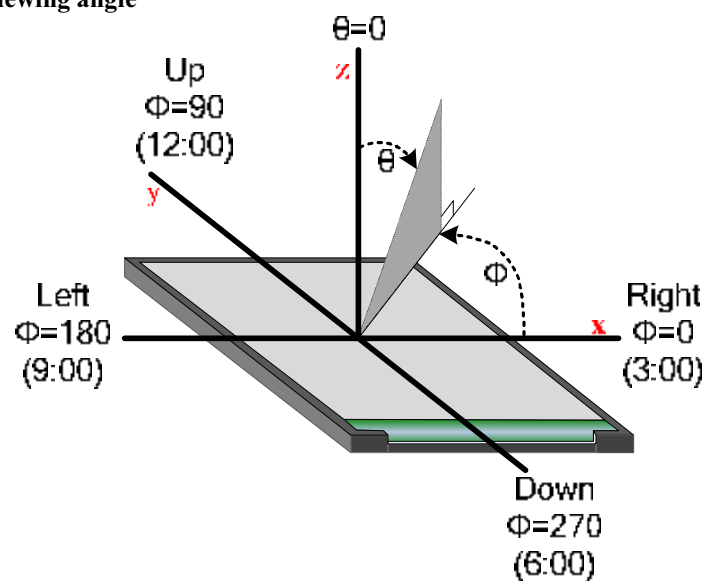

■ INTERFACE DESCRIPTION

FPC Connector is used for the module electronics interface. The recommended model is FH12A-40S-0.5SH manufactured by Hirose.

Pin No.	Symbol	I/O	Function	Remark
1	VCOM	P	Common Voltage	
2	VDD	P	Power Voltage for digital circuit	
3	VDD	P	Power Voltage for digital circuit	
4	NC	---	No connection	
5	Reset	I	Global reset pin	
6	STBYB	I	Standby mode, Normally pulled high STBYB = "1", normal operation STBYB = "0", timing controller, source driver will turn off, all output are High-Z	
7	GND	P	Ground	
8	RXIN0-	I	- LVDS differential data input	
9	RXIN0+	I	+ LVDS differential data input	
10	GND	P	Ground	
11	RXIN1-	I	- LVDS differential data input	
12	RXIN1+	I	+ LVDS differential data input	
13	GND	P	Ground	
14	RXIN2-	I	- LVDS differential data input	
15	RXIN2+	I	+ LVDS differential data input	
16	GND	P	Ground	
17	RXCLKIN-	I	- LVDS differential clock input	
18	RXCLKIN+	I	+ LVDS differential clock input	
19	GND	P	Ground	
20	RXIN3-	I	- LVDS differential data input	
21	RXIN3+	I	+ LVDS differential data input	
22	GND	P	Ground	
23	NC	---	No connection	
24	NC	---	No connection	
25	GND	P	Ground	
26	NC	---	No connection	



27	DIMO	O	Backlight CABC controller signal output	
28	SELB	I	6bit/8bit mode select	Note1
29	AVDD	P	Power for Analog Circuit	
30	GND	P	Ground	
31	LED-	P	LED Cathode	
32	LED-	P	LED Cathode	
33	L/R	I	Horizontal inversion	Note3
34	U/D	I	Vertical inversion	Note3
35	VGL	P	Gate OFF Voltage	
36	CABCEN1	I	CABC H/W enable	Note2
37	CABCEN0	I	CABC H/W enable	Note2
38	VGH	P	Gate ON Voltage	
39	LED+	P	LED Anode	
40	LED+	P	LED Anode	

I: input, O: output, P: Power

Note1: If LVDS input data is 6 bits ,SELB must be set to High;

If LVDS input data is 8 bits ,SELB must be set to Low.

Note2: When CABC_EN="00", CABC OFF.

When CABC_EN="01", user interface image.

When CABC_EN="10", still picture.

When CABC_EN="11", moving image.

When CABC off, don't connect DIMO, else connect it to backlight.


Note3: When L/R="0", set right to left scan direction.

When L/R="1", set left to right scan direction.

When U/D="0", set top to bottom scan direction.


When U/D="1", set bottom to top scan direction.

Note: Definition of scanning direction.
Refer to the figure as below:

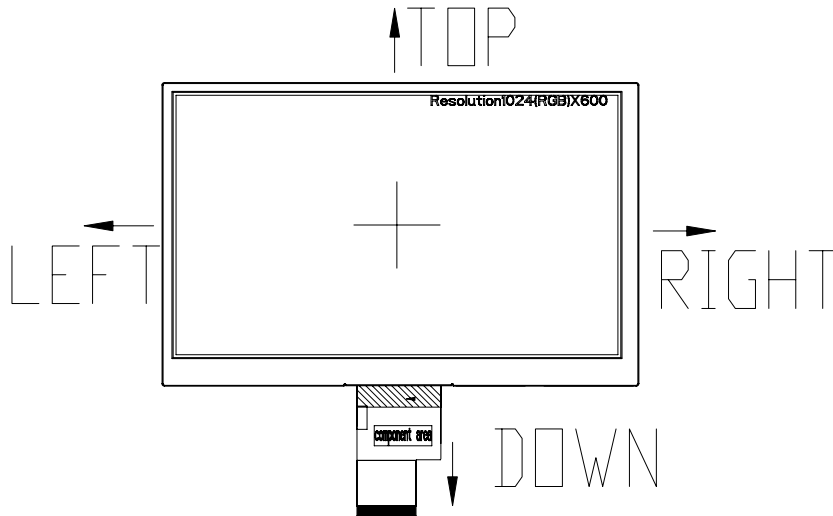

Touch panel interface

Pin No.	Symbol	I/O	Function	Remark
1	Y2	-	Up	
2	X2	-	Right	
3	Y1	-	Bottom	
4	X1	-	Left	

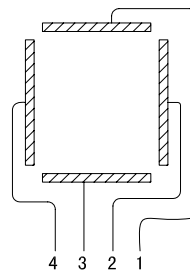

逻辑图



■ TOUCH SCREEN PANEL SPECIFICATIONS

1. ELECTRICAL CHARACTERISTICS

Item	Value			Unit	Remark
	Min.	Typ.	Max.		
Linearity	-1.5	-	1.5	%	Analog X and Y directions
Terminal Resistance	350	-	1100	Ω	X(Film side)
	100	-	500	Ω	Y(Glass side)
Insulation resistance	10	-	-	M Ω	DC 25V
Voltage	-	-	10	V	DC
Chattering	-	-	10	ms	100k Ω pull-up
Transparency	78	-	-	%	



Note: Avoid operating with hard or sharp material such as a ball point pen or a mechanical pencil except a polyacetal pen (tip R0.8mm or less) or a finger.

2. MECHANICAL & RELIABILITY CHARACTERISTICS

Item	Value			Unit	Remark
	Min.	Typ.	Max.		
Active force	80	-	-	gf	Note 1
Durability-surface scratching	Write 100,000	-	-	characters	Note 2
Durability-surface pitting	1,000,000	-	-	touches	Note 3
Surface hardness	3	-	-	H	

Note 1: Active force test condition

- (1) Input DC 5V on X direction, Drop off Polyacetal Stylus (R0.8), until output voltage stabilize ,then get the activation force ◦
- (2) R8.0mm Silicon rubber for finger Activation force test
- (3) Test point: 9 points

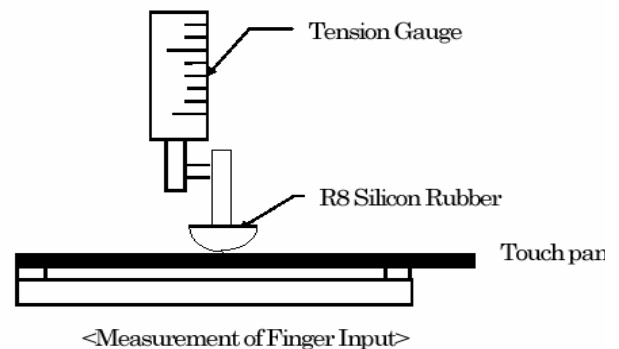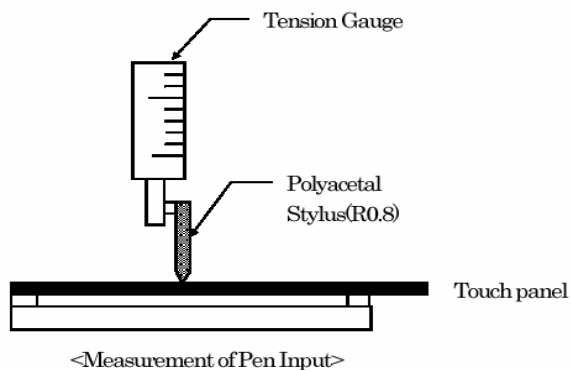


Note 2: Measurement for surface area.

- Scratch 100,000 times straight line on the film with a stylus change every 20,000 times.
- Force: 250gf.
- Speed: 60mm/sec.
- Stylus: R0.8 polyacetal tip.

Note 3: Pit 1,000,000 times on the film with a R0.8 silicon rubber.

- Force: 250gf.
- Speed: 2times/sec.

3. LINEARITY DEFINITION

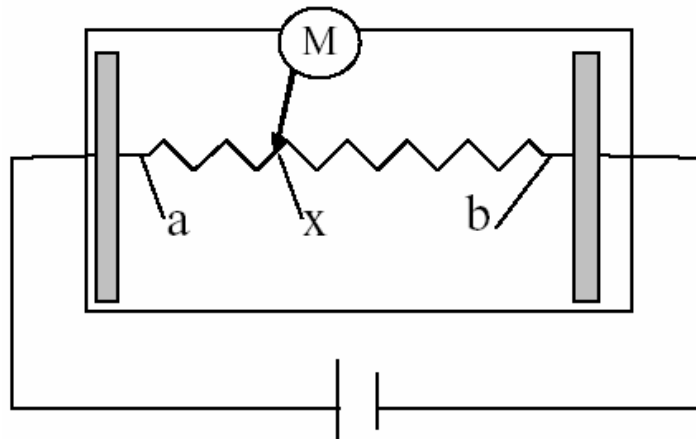


Va: maximum voltage in the active area of touch panel

Vb: minimum voltage in the active area of touch panel

X: random measuring point


Vxm: actual voltage of Lx point

Vxi: theoretical voltage of Lx point

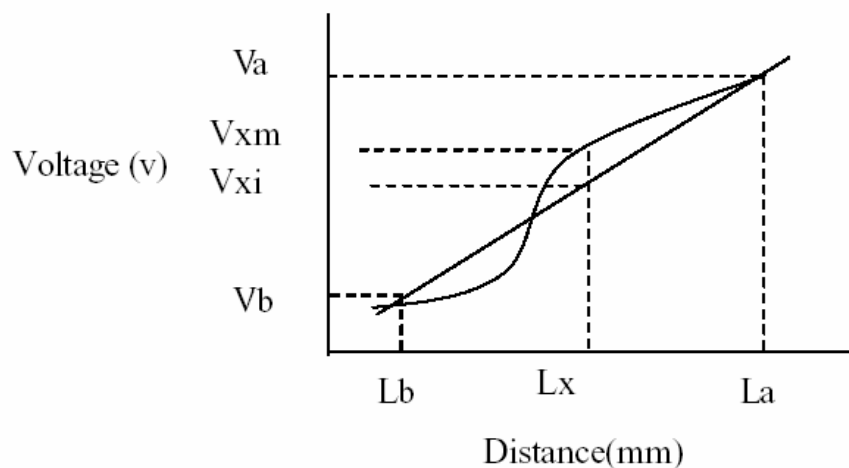

$$\text{Linearity} = \frac{|V_{xi} - V_{xm}|}{(V_a - V_b)} \times 100\%$$


Note: Test area is as follows and operation force is 150gf.

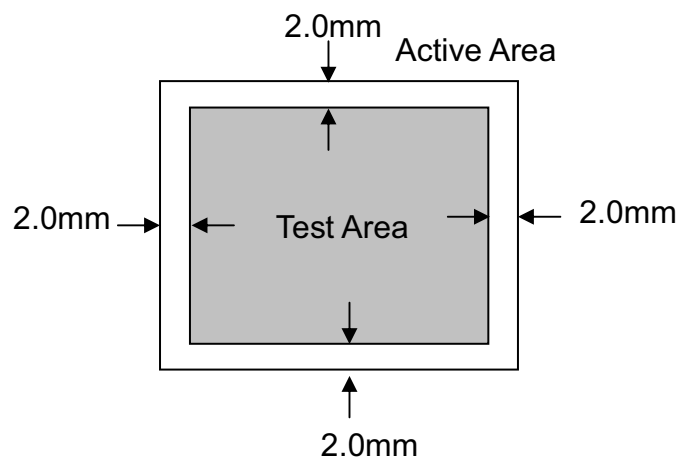

4. HOUSING DESIGN GUIDE


Housing design follow as below.

- 1) Avoid the design that housing overlap and press on the active area of the LCM.
- 2) Give enough gap(over 0.5mm at compressed) between the housing and TSP to protect wrong operating.

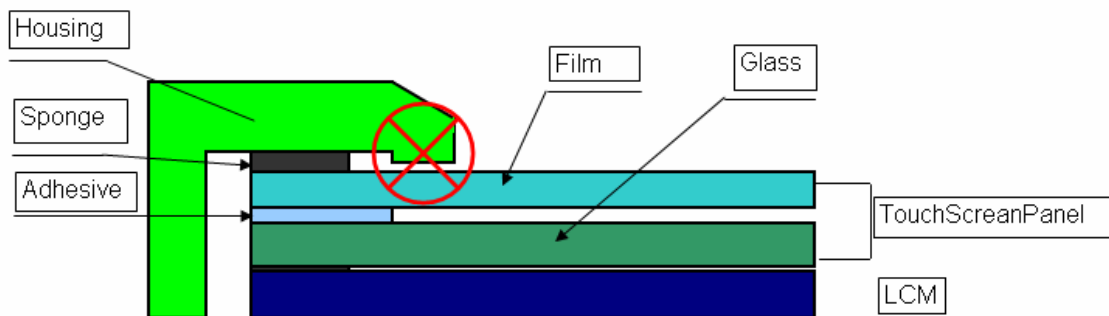

- 3) Use a buffer material(Gasket) between the TSP and housing to protect damage and wrong operating.

overlap and press on the inside of TSP view area.

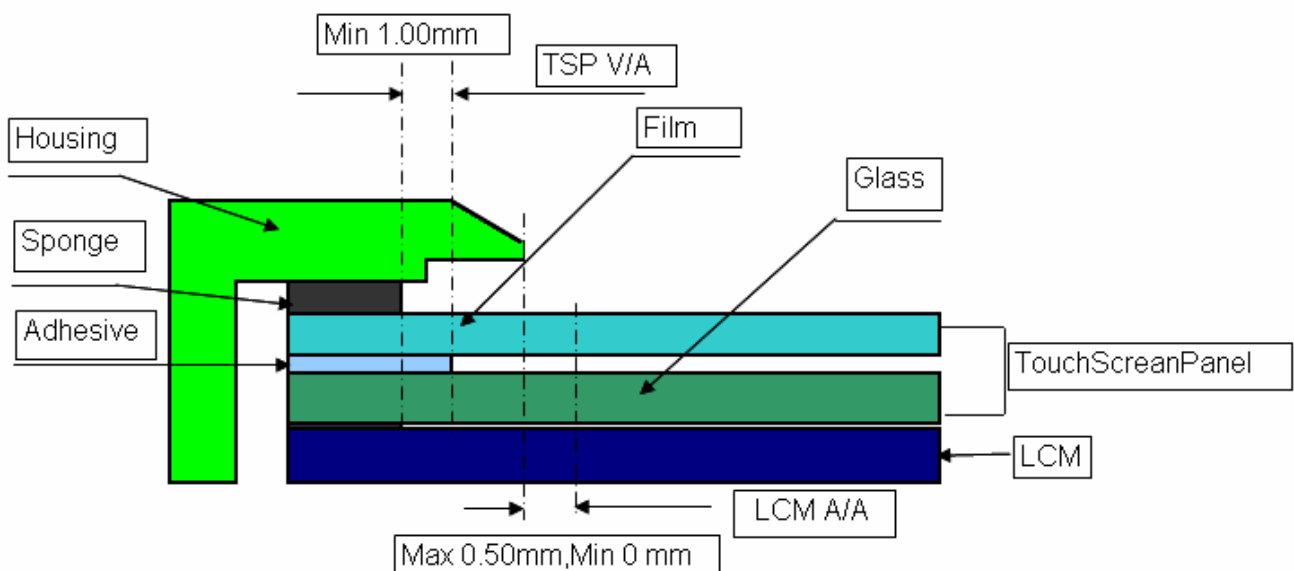



■ REFERENCE APPLICATION NOTES

1. Timing Characteristics

1.1 AC Electrical Characteristics


Parameter	Symbol	Values			Unit	Remark
		Min.	Typ.	Max.		
Clock frequency	R_{xFCLK}	40.8	51.2	67.2	MHz	
Input data skew margin	T_{RSKM}	500	-	-	ps	
Clock high time	T_{LVCH}	-	$4/(7 * R_{xFCLK})$	-	ns	
Clock low time	T_{LVCL}	-	$3/(7 * R_{xFCLK})$	-	ns	

1.2 Input Clock and Data Timing Diagram

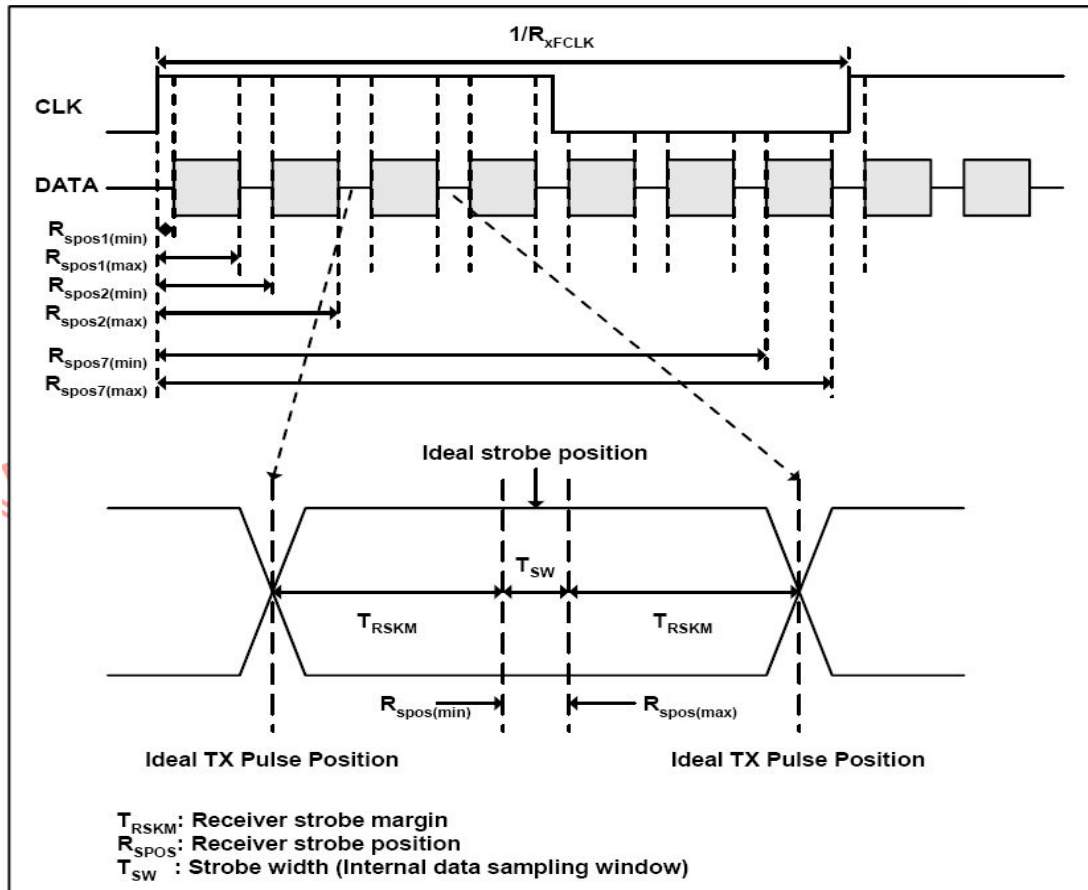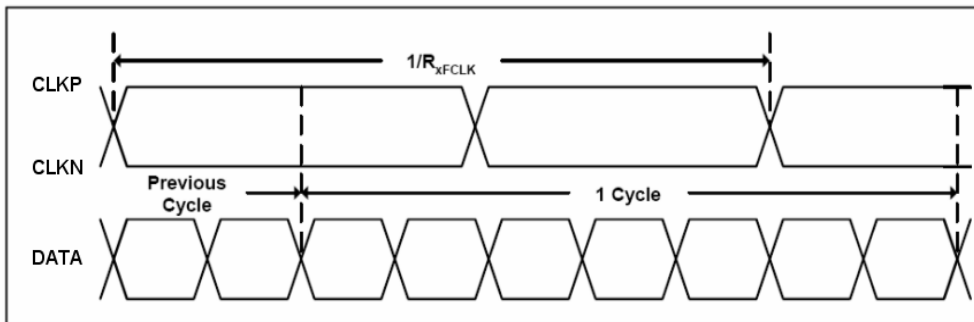

1.3 DC Electrical Characteristics

Parameter	Symbol	Values			Unit	Remark
		Min.	Typ.	Max.		
Differential input high Threshold voltage	R_{xVTH}	-	-	+0.1	V	$R_{xVCM}=1.2V$
Differential input low Threshold voltage	R_{xVTL}	-0.1	-	-	V	
Input voltage range (singled-end)	R_{xVIN}	0	-	2.4	V	
Differential input common mode voltage	R_{xVCM}	$ V_{ID} /2$	-	$2.4- V_{ID} /2$	V	
Differential voltage	$ V_{ID} $	0.2	-	0.6	V	
Differential input leakage current	RV_{xliz}	-10	-	+10	uA	

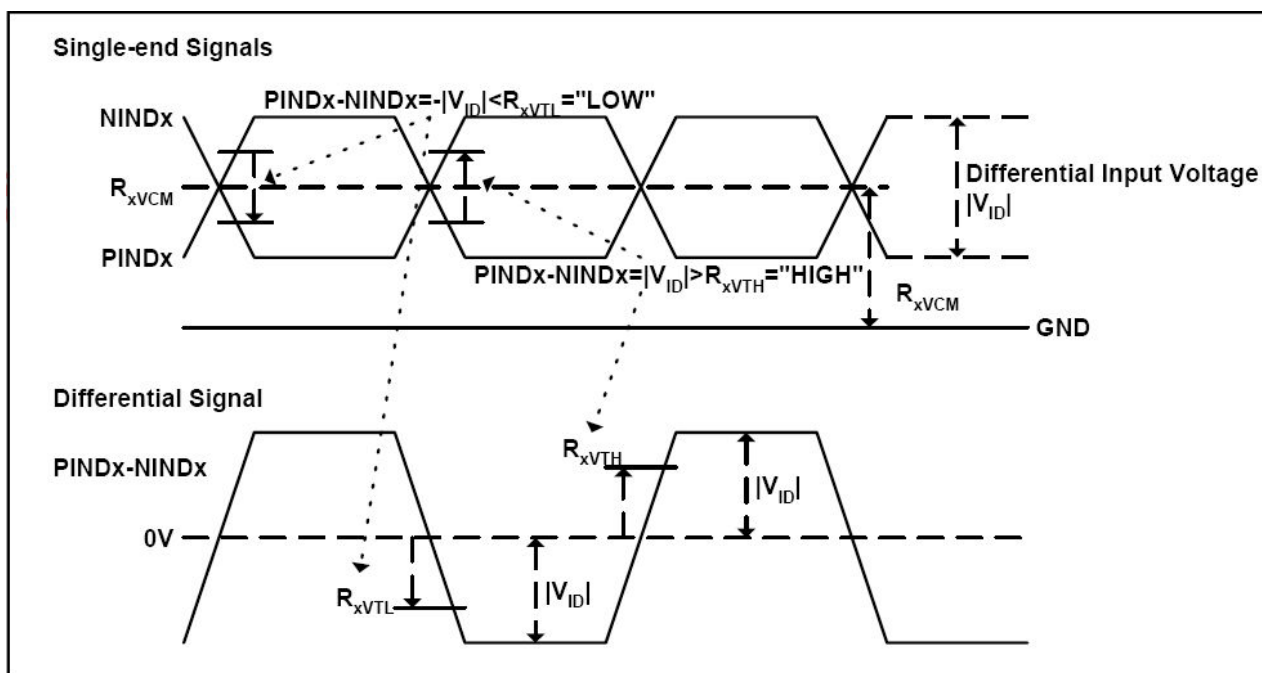


1.4 Timing


Item	Symbol	Values			Unit	Remark
		Min.	Typ.	Max.		
Clock Frequency	fclk	40.8	51.2	67.2	MHz	Frame rate =60Hz
Horizontal display area	thd	1024			DCLK	
HS period time	th	1114	1344	1400	DCLK	
HS Blanking	thb	90	320	376	DCLK	
Vertical display area	tvd	600			H	
VS period time	tv	610	635	800	H	
VS Blanking	thb	10	35	200	H	

1.5 Data Input Format

6bit LVDS input

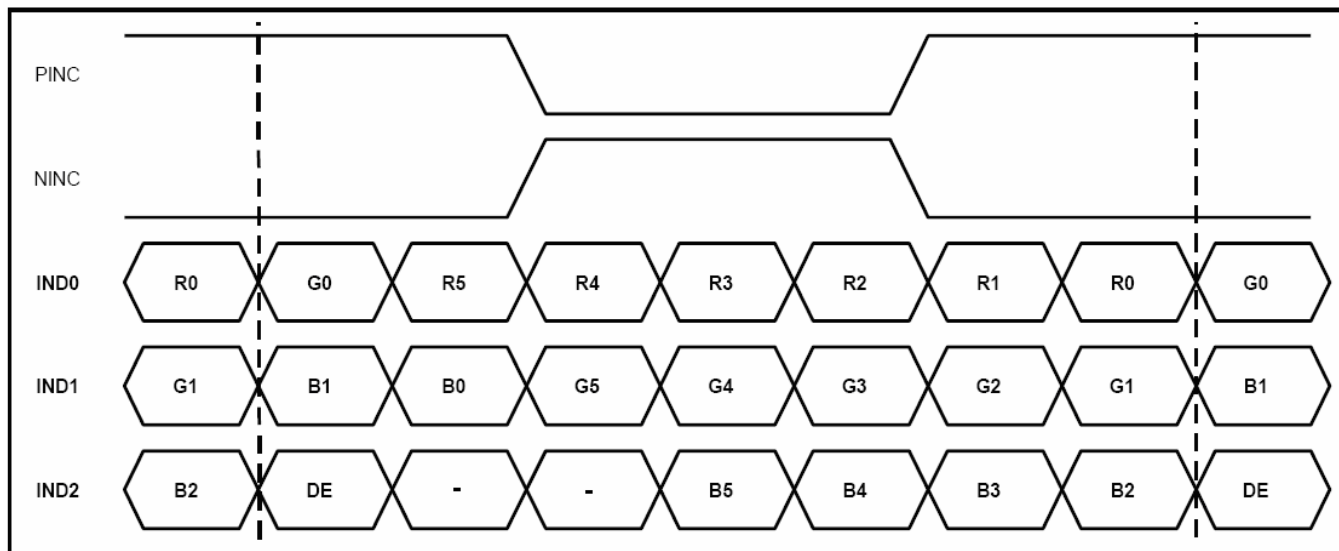


8bit LVDS input

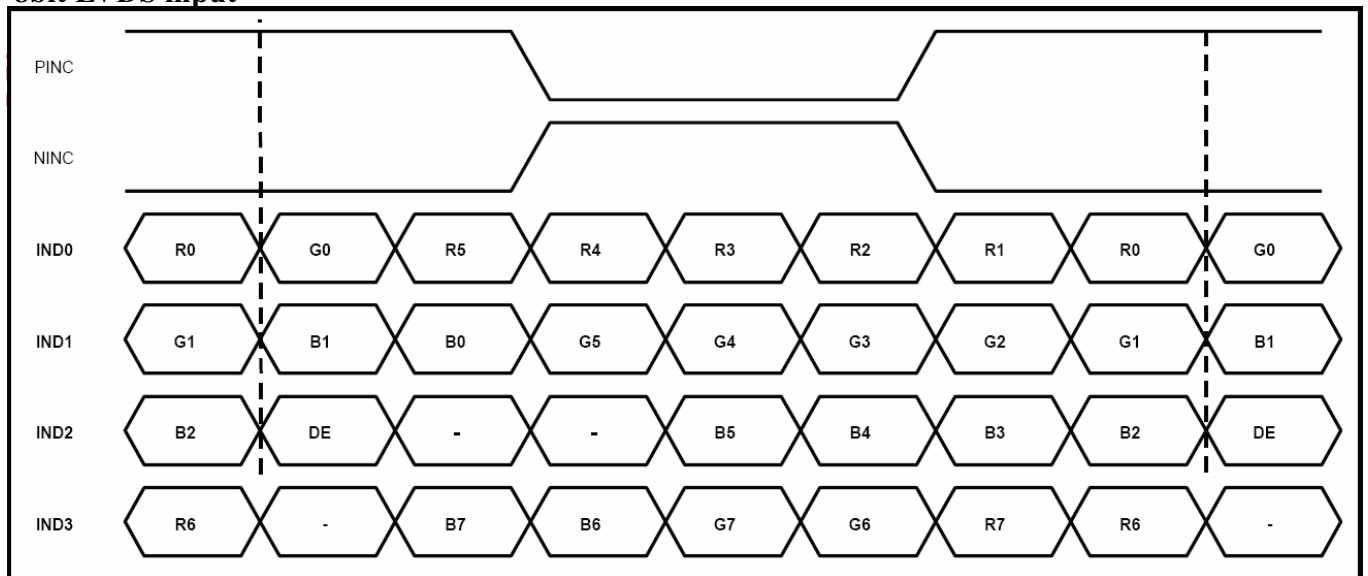


Note: Support DE timing mode only, SYNC mode not supported.

2. Power Sequence

a. Power on:

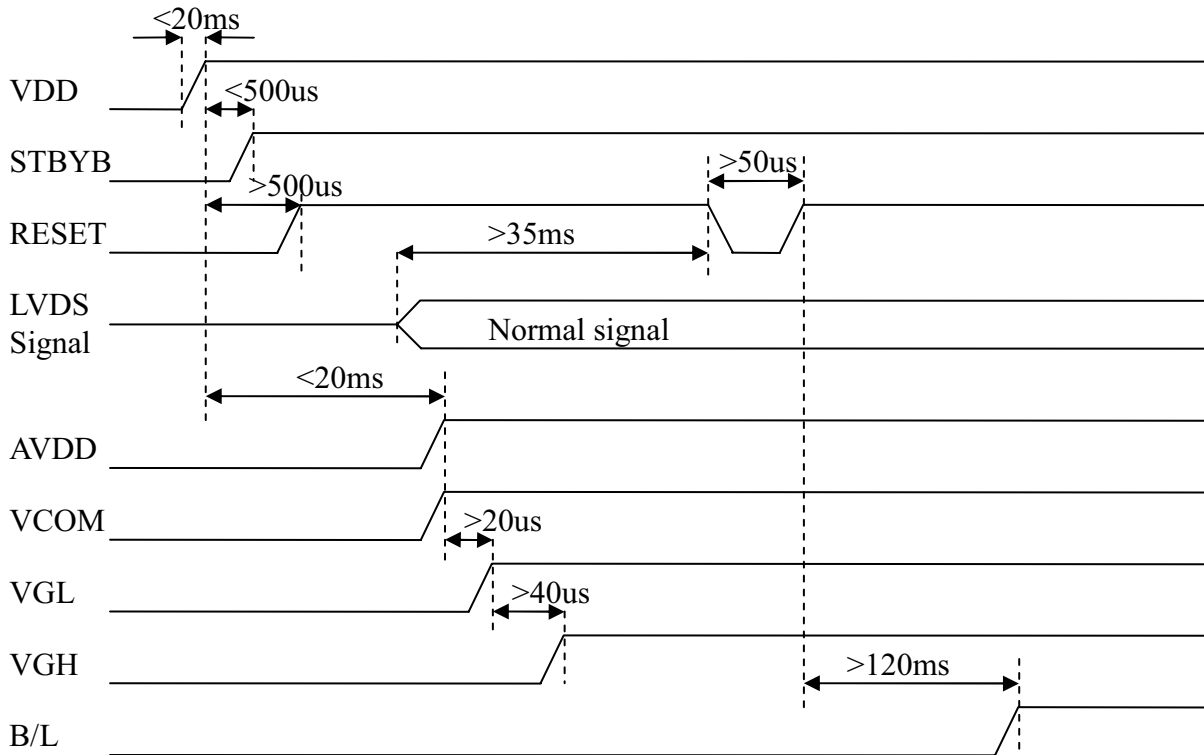

b. Power off:

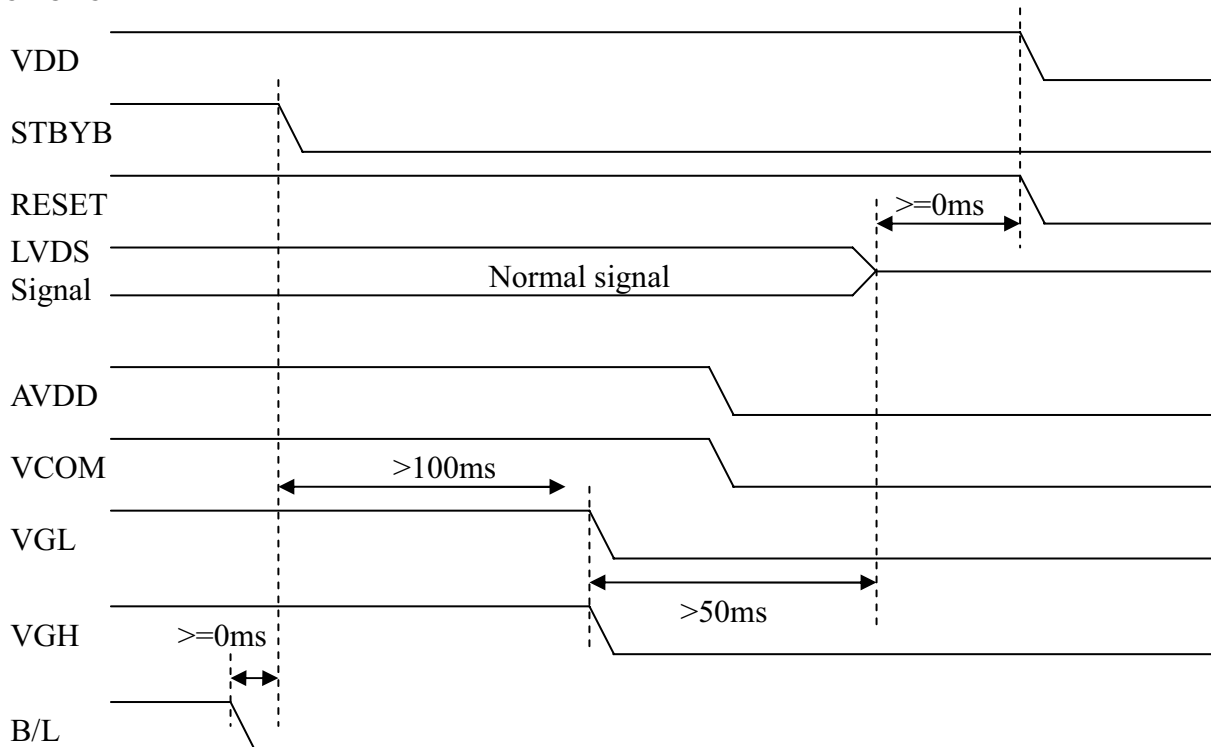

**■ RELIABILITY TEST**

No.	Test Item	Test Condition	Inspection after test
1	High Temperature Storage	$80 \pm 2^{\circ}\text{C}/240$ hours	Note 1, Note 4
2	Low Temperature Storage	$-30 \pm 2^{\circ}\text{C}/240$ hours	Note 1, Note 4
3	High Temperature Operating	$70 \pm 2^{\circ}\text{C}/240$ hours	Note 2, Note 4
4	Low Temperature Operating	$-20 \pm 2^{\circ}\text{C}/240$ hours	Note 1, Note 4
5	Temperature Cycle	$-30 \pm 2^{\circ}\text{C} \sim 25 \sim 80 \pm 2^{\circ}\text{C} \times 100$ cycles	Note 4
6	Damp Proof Test	$60^{\circ}\text{C} \pm 5^{\circ}\text{C} \times 90\%\text{RH}/240$ hours	Note 4
7	Vibration Test	Frequency range: 10Hz~55Hz Stroke: 1.5mm, Sweep: 10Hz~55Hz~10Hz 2hours for each direction of X,Y,Z. (6 hours for total)	
8	Mechanical Shock	100G 6ms, $\pm X, \pm Y, \pm Z$ 3times for each direction	
9	Package Drop Test	Height: 60 cm 1 corner, 3 edges, 6 surfaces	
10	Package Vibration Test	Random Vibration: 0.015G*G/Hz from 5-200Hz, -6dB/Octave from 200-500Hz 2 hours for each direction of X.Y.Z. (6 hours for total)	
11	ESD test	$\pm 2\text{KV}$, Human Body Mode, 100pF, /1500 Ω	


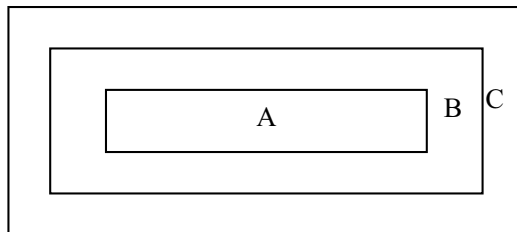
Note 1: Ta is the ambient temperature of samples.

Note 2: Ts is the temperature of panel's surface.



Note 3: In the standard condition, there shall be no practical problem that may affect the display function. After the reliability test, the product only guarantees operation, but doesn't guarantee all the cosmetic specification.

Note 4: Before cosmetic and function tests, the product must have enough recovery time, at least 2 hours at room temperature.



■ INSPECTION CRITERION

 OUTGOING QUALITY STANDARD	PAGE 1 OF 8						
TITLE:FUNCTIONAL TEST & INSPECTION CRITERIA							
<p>This specification is made to be used as the standard acceptance/rejection criteria for Wider Screen TFT-LCD module product.</p> <p>1. Sample plan</p> <p>Sampling plan according to GB/T2828.1-2003/ISO 2859-1 : 1999 and ANSI/ASQC Z1.4-1993, normal level 2 and based on:</p> <p>Major defect: AQL 0.65</p> <p>Minor defect: AQL 1.5</p> <p>2. Inspection condition</p> <p>Viewing distance for cosmetic inspection is about 30cm with bare eyes, and under an environment of 20~40W light intensity, all directions for inspecting the sample should be within 45° against perpendicular line.(Normal temperature 20~25° C and normal humidity 60± 15%RH).</p> <p>3. Definition of Inspection Item.</p> <p>3.1 Definition of inspection zone in LCD.</p> <div data-bbox="531 1193 1050 1424" data-label="Diagram">  </div> <p>Zone A: character/Digit area</p> <p>Zone B: viewing area except Zone A (ZoneA+ZoneB=minimum Viewing area)</p> <p>Zone C: Outside viewing area (invisible area after assembly in customer's product)</p> <p>ZoneB+ZoneC= Around opaque <u>edge</u> area on TP.</p> <p>Fig.1 Inspection zones in an LCD.</p> <p>Note: As a general rule, visual defects in Zone C are permissible, when it is no trouble for quality and assembly of customer's product.</p> <p>3.2 Definition of some visual defect</p> <table border="1"> <tr> <td data-bbox="244 1823 467 1917">Bright dot.</td><td data-bbox="467 1823 1393 1917">Dots appear bright and unchanged in size in which LCD panel is displaying under black pattern.</td></tr> <tr> <td data-bbox="244 1917 467 2000">Dark dot.</td><td data-bbox="467 1917 1393 2000">Dots appear dark and unchanged in size in which LCD panel is displaying under pure red, green, blue picture, or pure whiter picture.</td></tr> <tr> <td data-bbox="244 2000 467 2101">Dark / Bright Lines.</td><td data-bbox="467 2000 1393 2101">Lines on display which appear dark/bright and usually result from the contamination.</td></tr> </table>		Bright dot.	Dots appear bright and unchanged in size in which LCD panel is displaying under black pattern.	Dark dot.	Dots appear dark and unchanged in size in which LCD panel is displaying under pure red, green, blue picture, or pure whiter picture.	Dark / Bright Lines.	Lines on display which appear dark/bright and usually result from the contamination.
Bright dot.	Dots appear bright and unchanged in size in which LCD panel is displaying under black pattern.						
Dark dot.	Dots appear dark and unchanged in size in which LCD panel is displaying under pure red, green, blue picture, or pure whiter picture.						
Dark / Bright Lines.	Lines on display which appear dark/bright and usually result from the contamination.						



		OUTGOING QUALITY STANDARD		PAGE 2 OF 8																				
TITLE:FUNCTIONAL TEST & INSPECTION CRITERIA																								
4. Major Defect																								
Item No	Items to be inspected	Inspection Standard			Classification of defects																			
4.1	All functional defects	1) No display 2) Display abnormally 3) Open or missing segment 4) Short circuit 5) Excess power consumption 6) Back-light no lighting, flickering and abnormal lighting.			Major																			
4.2	Missing	Missing component																						
4.3	Outline dimension	Overall outline dimension beyond the drawing is not allowed.																						
4.4	Crack	Creaks tend to break are not allowed.																						
5. Minor Defect																								
Item No	Items to be inspected	Inspection Standard			Classification of defects																			
5.1	Bright dot. defect.  Φ=(x+y) /2	<table><tr><th rowspan="2">Zone Size(mm)</th><th colspan="3">Acceptable Qty</th></tr><tr><th>A</th><th>B</th><th>C</th></tr><tr><td>Φ ≤0.15</td><td colspan="3">Acceptable (clustering of spot not allowed)</td></tr><tr><td>0.15 < Φ ≤0.25</td><td colspan="3">N ≤6.</td></tr><tr><td>0.25 < Φ ≤0.50</td><td colspan="3">N ≤2</td></tr></table>			Zone Size(mm)	Acceptable Qty			A	B	C	Φ ≤0.15	Acceptable (clustering of spot not allowed)			0.15 < Φ ≤0.25	N ≤6.			0.25 < Φ ≤0.50	N ≤2			Minor
Zone Size(mm)	Acceptable Qty																							
	A	B	C																					
Φ ≤0.15	Acceptable (clustering of spot not allowed)																							
0.15 < Φ ≤0.25	N ≤6.																							
0.25 < Φ ≤0.50	N ≤2																							
5.2	Dark dot defect.	<table><tr><th rowspan="2">Zone Size(mm)</th><th colspan="3">Acceptable Q'ty</th></tr><tr><th>A</th><th>B</th><th>C</th></tr><tr><td>Φ ≤0.15</td><td colspan="3">Acceptable</td></tr><tr><td>0.15 < Φ ≤0.30</td><td colspan="3">N ≤6</td></tr><tr><td>0.30 < Φ ≤0.50</td><td colspan="3">N ≤4</td></tr></table>			Zone Size(mm)	Acceptable Q'ty			A	B	C	Φ ≤0.15	Acceptable			0.15 < Φ ≤0.30	N ≤6			0.30 < Φ ≤0.50	N ≤4			
Zone Size(mm)	Acceptable Q'ty																							
	A	B	C																					
Φ ≤0.15	Acceptable																							
0.15 < Φ ≤0.30	N ≤6																							
0.30 < Φ ≤0.50	N ≤4																							
5.3	Bright / Dark line.	0.01 < W ≤ 0.10, 0.30 < L ≤ 1.50, N ≤1																						
Note: 1. Total defective dots shall not exceed 6 pcs. 2. Minimum distance between defective dots is more than 5mm. 3. 2 Adjacent dark sub pixel defect or bright sub pixel defect is not more than 1pair. 4. W: Width, L: Length, N: Count.																								



		OUTGOING QUALITY STANDARD		PAGE 3 OF 8																											
TITLE:FUNCTIONAL TEST & INSPECTION CRITERIA																															
Item No	Items to be inspected	Inspection Standard			Classification of defects																										
5.4	Linear defect Foreign material under polarizer,	<table><tr><td colspan="2">Size(m)</td><td colspan="3">Acceptable Qty</td></tr><tr><td rowspan="2">L(Length)</td><td rowspan="2">W(Width)</td><td colspan="3">Zone</td></tr><tr><td>A</td><td>B</td><td>C</td></tr><tr><td>Ignore</td><td>$W \leq 0.05$</td><td colspan="2">Acceptable</td><td rowspan="3">Acceptable</td></tr><tr><td>$L \leq 5.0$</td><td>$0.05 < W \leq 0.15$</td><td colspan="2">$N \leq 5$</td></tr><tr><td>$5.0 \leq L$</td><td>$0.15 \leq W$</td><td colspan="2">0</td></tr></table>			Size(m)		Acceptable Qty			L(Length)	W(Width)	Zone			A	B	C	Ignore	$W \leq 0.05$	Acceptable		Acceptable	$L \leq 5.0$	$0.05 < W \leq 0.15$	$N \leq 5$		$5.0 \leq L$	$0.15 \leq W$	0		Minor
	Size(m)		Acceptable Qty																												
L(Length)	W(Width)	Zone																													
		A	B	C																											
Ignore	$W \leq 0.05$	Acceptable		Acceptable																											
$L \leq 5.0$	$0.05 < W \leq 0.15$	$N \leq 5$																													
$5.0 \leq L$	$0.15 \leq W$	0																													
	Circular Defect, Foreign material under polarizer,  $\Phi = (x+y) / 2$	<table><tr><td rowspan="2">Zone Size(mm)</td><td colspan="3">Acceptable Q'ty</td></tr><tr><td>A</td><td>B</td><td>C</td></tr><tr><td>$\Phi \leq 0.25$</td><td colspan="2">Acceptable</td><td rowspan="3">Acceptable</td></tr><tr><td>$0.25 < \Phi \leq 0.50$</td><td colspan="2">$N \leq 4$</td></tr><tr><td>$0.50 \leq \Phi$</td><td colspan="2">0</td></tr></table>			Zone Size(mm)	Acceptable Q'ty			A	B	C	$\Phi \leq 0.25$	Acceptable		Acceptable	$0.25 < \Phi \leq 0.50$	$N \leq 4$		$0.50 \leq \Phi$	0		Minor									
Zone Size(mm)	Acceptable Q'ty																														
	A	B	C																												
$\Phi \leq 0.25$	Acceptable		Acceptable																												
$0.25 < \Phi \leq 0.50$	$N \leq 4$																														
$0.50 \leq \Phi$	0																														
5.5	Polarizer defect.	<p>5.4.1 Polarizer Position</p> <p>(i) Shifting in position should not exceed the glass outline dimension.</p> <p>(ii) Incomplete covering of the viewing area due to shifting is not allowed.</p> <p>5.4.2 Dirt on polarizer</p> <p>Dirt which can be wiped easily should be accepted.</p> <p>5.4.3 Polarizer Nick & Dent</p> <table><tr><td rowspan="3">Sizes(mm)</td><td colspan="3">Acceptable Qty</td></tr><tr><td colspan="3">Zone</td></tr><tr><td>A</td><td>B</td><td>C</td></tr><tr><td>$\Phi < 0.25$</td><td colspan="2">Acceptable</td><td rowspan="3">Acceptable</td></tr><tr><td>$0.25 \leq \Phi \leq 0.5$</td><td colspan="2">$N \leq 4$</td></tr><tr><td>$\Phi > 0.5$</td><td colspan="2">0</td></tr></table>			Sizes(mm)	Acceptable Qty			Zone			A	B	C	$\Phi < 0.25$	Acceptable		Acceptable	$0.25 \leq \Phi \leq 0.5$	$N \leq 4$		$\Phi > 0.5$	0		Minor						
Sizes(mm)	Acceptable Qty																														
	Zone																														
	A	B	C																												
$\Phi < 0.25$	Acceptable		Acceptable																												
$0.25 \leq \Phi \leq 0.5$	$N \leq 4$																														
$\Phi > 0.5$	0																														




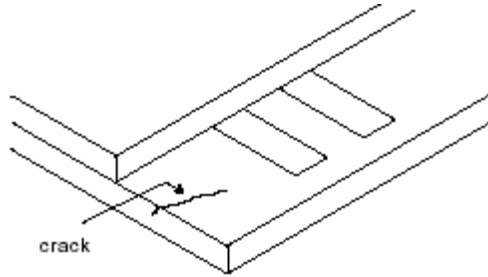
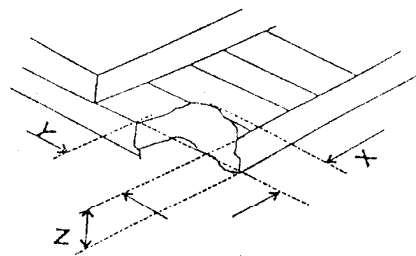
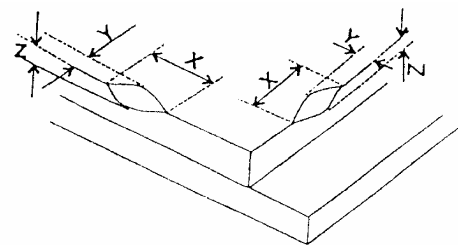
OUTGOING QUALITY STANDARD

PAGE 4 OF 8



TITLE:FUNCTIONAL TEST & INSPECTION CRITERIA


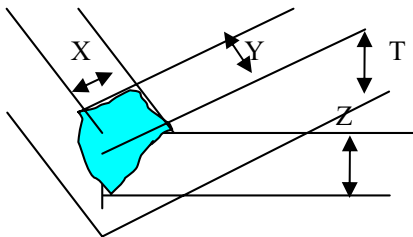
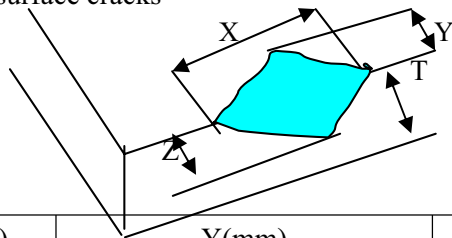
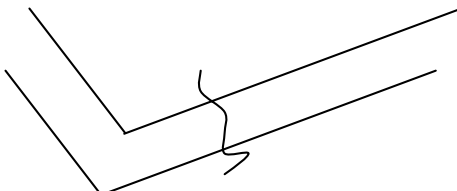
5. Minor Defect

Item No	Items to be inspected	Inspection Standard	Classification of defects																										
5.6	Polarizer defect	5.4.4Air bubbles between glass & polarizer: <table><tr><th rowspan="3">Size(mm)</th><th colspan="3">Acceptable Qty</th></tr><tr><th colspan="3">Zone</th></tr><tr><th>A</th><th>B</th><th>C</th></tr><tr><td>$\Phi \leq 0.3$</td><td colspan="2">Acceptable</td><td rowspan="4">Acceptable</td></tr><tr><td>$0.3 < \Phi \leq 1.0$</td><td colspan="2">3</td></tr><tr><td>$1.0 < \Phi \leq 1.5$</td><td colspan="2">1</td></tr><tr><td>$\Phi > 1.5$</td><td colspan="2">0</td></tr></table>	Size(mm)	Acceptable Qty			Zone			A	B	C	$\Phi \leq 0.3$	Acceptable		Acceptable	$0.3 < \Phi \leq 1.0$	3		$1.0 < \Phi \leq 1.5$	1		$\Phi > 1.5$	0		Minor			
		Size(mm)		Acceptable Qty																									
Zone																													
A	B		C																										
$\Phi \leq 0.3$	Acceptable		Acceptable																										
$0.3 < \Phi \leq 1.0$	3																												
$1.0 < \Phi \leq 1.5$	1																												
$\Phi > 1.5$	0																												
		5.4.5 Polarizer scratch (i) If the Polarizer scratch can be seen after cover assembling or in the operating condition, judge by the line defect of 5.4. (ii) If the Polarizer scratch can be seen only in non-operating condition or some special angle, judge by the following. <table><tr><th colspan="2">Size(mm)</th><th colspan="3">Acceptable Qty</th></tr><tr><th rowspan="2">L(Length)</th><th rowspan="2">W(Width)</th><th colspan="3">Zone</th></tr><tr><th>A</th><th>B</th><th>C</th></tr><tr><td>Ignore</td><td>$W \leq 0.02$</td><td colspan="2">Ignore</td><td rowspan="3">Ignore</td></tr><tr><td>$1.0 < L \leq 5.0$</td><td>$0.02 < W \leq 0.2$</td><td colspan="2">$N \leq 4$</td></tr><tr><td>$5.0 < L$</td><td>$0.2 < W$</td><td colspan="2">0</td></tr></table>	Size(mm)		Acceptable Qty			L(Length)	W(Width)	Zone			A	B	C	Ignore	$W \leq 0.02$	Ignore		Ignore	$1.0 < L \leq 5.0$	$0.02 < W \leq 0.2$	$N \leq 4$		$5.0 < L$	$0.2 < W$	0		Minor
Size(mm)		Acceptable Qty																											
L(Length)	W(Width)	Zone																											
		A	B	C																									
Ignore	$W \leq 0.02$	Ignore		Ignore																									
$1.0 < L \leq 5.0$	$0.02 < W \leq 0.2$	$N \leq 4$																											
$5.0 < L$	$0.2 < W$	0																											





		OUTGOING QUALITY STANDARD		PAGE 5 OF 8									
TITLE:FUNCTIONAL TEST & INSPECTION CRITERIA													
5. Minor Defect													
Item No	Items to be inspected	Inspection Standard			Classification of defects								
5.7	Glass defect	<div>(i) Crack Cracks are not allowed.</div> <div></div>			Minor								
		<div>(ii) TFT chips on corner</div> <div></div> <table><tr><td>X</td><td>Y</td><td>Z</td><td>Acceptable</td></tr><tr><td>≤3.0</td><td>≤3.0</td><td>Not more than the thickness of glass.</td><td>N≤3.</td></tr></table> <div>Chips on the corner of terminal shall not be allowed to extend into the ITO pad or expose perimeter seal.</div>			X	Y	Z	Acceptable	≤3.0	≤3.0	Not more than the thickness of glass.	N≤3.	Minor
		X	Y	Z	Acceptable								
≤3.0	≤3.0	Not more than the thickness of glass.	N≤3.										
<div>(iii)Usual surface cracks</div> <div></div> <table><tr><td>X</td><td>Y</td><td>Z</td><td>Acceptable</td></tr><tr><td>≤1.5</td><td>≤1.5</td><td>Not more than the thickness of glass.</td><td>N≤4.</td></tr></table> <div>It is only applicable to the upper glass of LCD.</div>			X	Y	Z	Acceptable	≤1.5	≤1.5	Not more than the thickness of glass.	N≤4.	Minor		
X	Y	Z	Acceptable										
≤1.5	≤1.5	Not more than the thickness of glass.	N≤4.										



		OUTGOING QUALITY STANDARD		PAGE 6 OF 8		
TITLE:FUNCTIONAL TEST & INSPECTION CRITERIA						
6. TP Cosmetic Defect.						
Item No	Items to be inspected	Inspection Standard			Classification of defects	
6.1	Black and white Spot defect Foreign Particle,	For dark/white spot, size Φ is defined as $\Phi = \frac{(x+y)}{2}$				Minor
Item No	Items to be inspected	Inspection Standard			Classification of defects	
6.2	Black line, White line, Scratch, Foreign material under film,					Minor

		OUTGOING QUALITY STANDARD	PAGE 7 OF 8						
TITLE:FUNCTIONAL TEST & INSPECTION CRITERIA									
6. TP Cosmetic Defect									
Item No	Items to be inspected	Inspection Standard	Classification of defects						
6.3	TP defect ,	<p>(i) Chips on corner</p>  <table border="1" data-bbox="481 806 1110 902"><thead><tr><th>X(mm)</th><th>Y(mm)</th><th>Z(mm)</th></tr></thead><tbody><tr><td>≤3.0</td><td>≤3.0</td><td>Z<T</td></tr></tbody></table>	X(mm)	Y(mm)	Z(mm)	≤3.0	≤3.0	Z<T	Minor
		X(mm)	Y(mm)	Z(mm)					
		≤3.0	≤3.0	Z<T					
<p>(ii) Usual surface cracks</p>  <table border="1" data-bbox="440 1299 1155 1395"><thead><tr><th>X(mm)</th><th>Y(mm)</th><th>Z(mm)</th></tr></thead><tbody><tr><td>≤6.0</td><td><2.0</td><td>Z<T</td></tr></tbody></table>	X(mm)	Y(mm)	Z(mm)	≤6.0	<2.0	Z<T	Minor		
X(mm)	Y(mm)	Z(mm)							
≤6.0	<2.0	Z<T							
<p>(iii) Crack</p> <p>Cracks tending to break are not allowed.</p> 	Major								
6.4	Total number of dots	The total number of luminous dots, dark dots, contamination particles, bubbles, scratch defects, pinholes must not exceed 10 /piece on the same TP.							



		OUTGOING QUALITY STANDARD		PAGE 8 OF 8	
TITLE:FUNCTIONAL TEST & INSPECTION CRITERIA					
7. Module Cosmetic Criteria					
Item No	Items to be inspected	Inspection Standard		Classification of defects	
1	Difference in Spec.	None allowed		Major	
2	Pattern peeling	No substrate pattern peeling and floating		Major	
3	Soldering defects	No soldering missing No soldering bridge No cold soldering		Major Major Minor	
4	Resist flaw on Printed Circuit Boards	visible copper foil (Ø0.5mm or more) on substrate pattern.		Minor	
5	Accretion of metallic Foreign matter	No accretion of metallic foreign matters (Not exceed Ø0.2mm).		Minor Minor	
6	Stain	No stain to spoil cosmetic badly.		Minor	
7	Plate discoloring	No plate fading, rusting and discoloring.		Minor	
8	Solder amount	a. Soldering side of PCB Solder to form a ‘Filet’ all around the lead. Solder should not hide the lead form perfectly. (too much)			
	1. Lead parts	b. Components side (In case of ‘Through Hole PCB’) Solder to reach the Components side of PCB.			
	2. Flat packages	Either ‘Toe’ (A) or ‘Seal’ (B) of the lead to be covered by ‘Filet’. Lead form to be assume over solder.			
3. Chips		(3/2) H ≥ h ≥ (1/2) H			
9	Solder splash ball/Solder splash	a.The spacing between solder ball and the conductor or solder pad h ≥ 0.13mm.The diameter of solder ball d ≤ 0.15mm.			
		b.The quantity of solder balls or solder. Splashes isn’t beyond 5 in 600 mm ² .		Minor	
		c.Solder balls/Solder splashes do not violate minimum electrical clearance.		Major	
		d.Solder balls/Solder splashes must be entrapped / encapsulated or attached to the metal surface .		Minor	
		Note: Entrapped/encapsulated/attached is intended to mean that normal service environment of the product will not cause a solder ball to become dislodged.			

■ PRECAUTIONS FOR USING LCD MODULES

1 Handling Precautions

- 1.1 The display panel is made of glass and polarizer. As glass is fragile. It tends to become or chipped during handling especially on the edges. Please avoid dropping or jarring. Do not subject it to a mechanical shock by dropping it or impact.
- 1.2 If the display panel is damaged and the liquid crystal substance leaks out, be sure not to get any in your mouth. If the substance contacts your skin or clothes, wash it off using soap and water.
- 1.3 Do not apply excessive force to the display surface or the adjoining areas since this may cause the color tone to vary. Do not touch the display with bare hands. This will stain the display area and degraded insulation between terminals (some cosmetics are determined to the polarizer).
- 1.4 The polarizer covering the display surface of the LCD module is soft and easily scratched. Handle this polarizer carefully. Do not touch, push or rub the exposed polarizers with anything harder than an HB pencil lead (glass, tweezers, etc.). Do not put or attach anything on the display area to avoid leaving marks on it. Condensation on the surface and contact with terminals due to cold will damage, stain or dirty the polarizer. After products are tested at low temperature they must be warmed up in a container before coming in to contact with room temperature air.
- 1.5 If the display surface becomes contaminated, breathe on the surface and gently wipe it with a soft dry cloth. If it is heavily contaminated, moisten cloth with one of the following solvents
 - Isopropyl alcohol
 - Ethyl alcoholDo not scrub hard to avoid damaging the display surface.
- 1.6 Solvents other than those above-mentioned may damage the polarizer. Especially, do not use the following.
 - Water
 - Ketone
 - Aromatic solventsWipe off saliva or water drops immediately, contact with water over a long period of time may cause deformation or color fading. Avoid contact with oil and fats.
- 1.7 Exercise care to minimize corrosion of the electrode. Corrosion of the electrodes is accelerated by water droplets, moisture condensation or a current flow in a high-humidity environment.
- 1.8 Install the LCD Module by using the mounting holes. When mounting the LCD module make sure it is free of twisting, warping and distortion. In particular, do not forcibly pull or bend the I/O cable or the backlight cable.
- 1.9 Do not attempt to disassemble or process the LCD module.
- 1.10 NC terminal should be open. Do not connect anything.
- 1.11 If the logic circuit power is off, do not apply the input signals.
- 1.12 Electro-Static Discharge Control, Since this module uses a CMOS LSI, the same careful attention should be paid to electrostatic discharge as for an ordinary CMOS IC. To prevent destruction of the elements by static electricity, be careful to maintain an optimum work environment.
 - Before removing LCM from its packing case or incorporating it into a set, be sure the module and your body have the same electric potential. Be sure to ground the body when handling the LCD modules.
 - Tools required for assembling, such as soldering irons, must be properly grounded. Make certain the AC power source for the soldering iron does not leak. When using an electric screwdriver to attach LCM, the screwdriver should be of ground potentiality to minimize as much as possible any transmission of electromagnetic waves produced sparks coming from the commutator of the motor.
 - To reduce the amount of static electricity generated, do not conduct assembling



and other work under dry conditions. To reduce the generation of static electricity be careful that the air in the work is not too dry. A relative humidity of 50%-60% is recommended. As far as possible make the electric potential of your work clothes and that of the work bench the ground potential.

- The LCD module is coated with a film to protect the display surface. Exercise care when peeling off this protective film since static electricity may be generated.

1.13 Since LCM has been assembled and adjusted with a high degree of precision, avoid applying excessive shocks to the module or making any alterations or modifications to it.

- Do not alter, modify or change the shape of the tab on the metal frame.
- Do not make extra holes on the printed circuit board, modify its shape or change the positions of components to be attached.
- Do not damage or modify the pattern writing on the printed circuit board.
- Absolutely do not modify the zebra rubber strip (conductive rubber) or heat seal connector.
- Except for soldering the interface, do not make any alterations or modifications with a soldering iron.
- Do not drop, bend or twist the LCM.

2 Handling precaution for LCM

2.1 LCM is easy to be damaged. Please note below and be careful for handling.

2.2 Correct handling:




As above picture, please handle with anti-static gloves around LCM edges.

2.3 Incorrect handling:



Please don't touch IC directly.

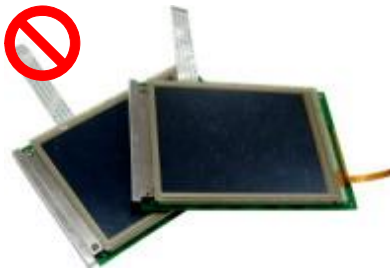

Please don't stack LCM.




Please don't hold the surface of panel.



Please don't stretch interface of output, such as FPC cable.



Please don't hold the surface of IC.



Please don't operate with sharp stick such as pens.

3 Storage Precautions


- 3.1 When storing the LCD modules, the following precaution are necessary.
 - 3.1.1 Store them in a sealed polyethylene bag. If properly sealed, there is no need for the desiccant.
 - 3.1.2 Store them in a dark place. Do not expose to sunlight or fluorescent light, keep the temperature between 0°C and 35°C, and keep the relative humidity between 40%RH and 60%RH.
 - 3.1.3 The polarizer surface should not come in contact with any other objects (We advise you to store them in the anti-static electricity container in which they were shipped).
- 3.2 Others 其它
 - 3.2.1 Liquid crystals solidify under low temperature (below the storage temperature range) leading to defective orientation or the generation of air bubbles (black or white). Air bubbles may also be generated if the module is subject to a low temperature.
 - 3.2.2 If the LCD modules have been operating for a long time showing the same display patterns, the display patterns may remain on the screen as ghost images and a slight contrast irregularity may also appear. A normal operating status can be regained by suspending use for some time. It should be noted that this phenomenon does not adversely affect performance reliability.
 - 3.2.3 To minimize the performance degradation of the LCD modules resulting from destruction caused by static electricity etc., exercise care to avoid holding the following sections when handling the modules.
 - 3.2.3.1 - Exposed area of the printed circuit board.
 - 3.2.3.2 -Terminal electrode sections.

4 USING LCD MODULES

4.1 Installing LCD Modules

The hole in the printed circuit board is used to fix LCM as shown in the picture below. Attend to the following items when installing the LCM.


- 4.1.1 Cover the surface with a transparent protective plate to protect the polarizer and LC cell.

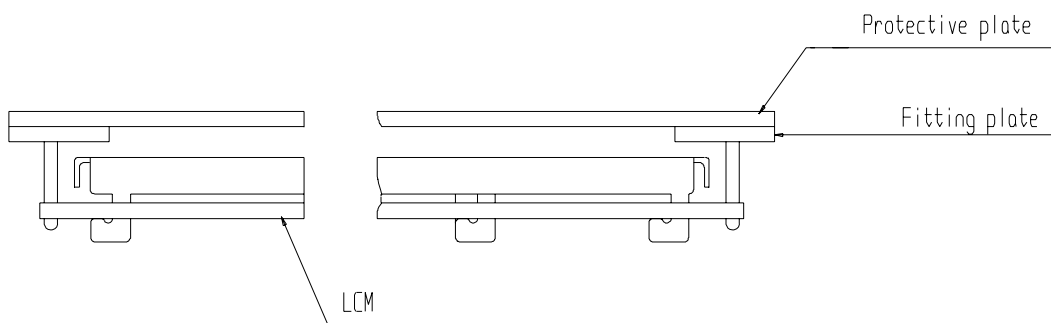

- 4.1.2 When assembling the LCM into other equipment, the spacer to the bit between the LCM and the fitting plate should have enough height to avoid causing stress to the module surface, refer to the individual specifications for measurements. The measurement tolerance should be $\pm 0.1\text{mm}$.

4.2 Precaution for assemble the module with BTB connector:

Please note the position of the male and female connector position, don't assemble or assemble like the method which the following picture shows

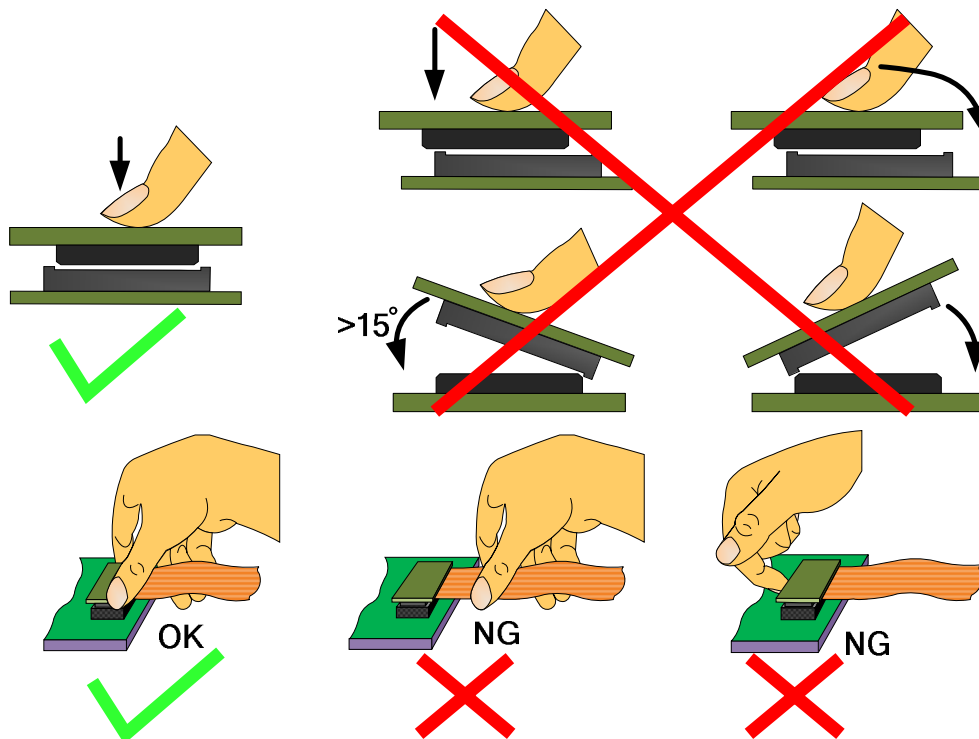

4.3 Precaution for soldering the LCM

	Manual soldering	Machine drag soldering	Machine press soldering
No RoHS Product	290°C ~350°C. Time : 3-5S.	330°C ~350°C. Speed : 15-17 mm/s.	300°C ~330°C. Time : 3-6S. Press: 0.8~1.2Mpa
RoHS Product	340°C ~370°C. Time : 3-5S.	350°C ~370°C. Speed : 15-17 mm/s.	330°C ~360°C. Time : 3-6S. Press: 0.8~1.2Mpa

- 4.3.1 If soldering flux is used, be sure to remove any remaining flux after finishing to soldering operation (This does not apply in the case of a non-halogen type of flux). It is recommended that you protect the LCD surface with a cover during soldering to prevent any damage due to flux spatters.
- 4.3.2 When soldering the electroluminescent panel and PC board, the panel and board should not be detached more than three times. This maximum number is determined by the temperature and time conditions mentioned above, though there may be some variance depending on the temperature of the soldering iron.
- 4.3.3 When remove the electroluminescent panel from the PC board, be sure the solder has completely melted, the soldered pad on the PC board could be damaged.

4.4 Precautions for Operation

- 4.4.1 Viewing angle varies with the change of liquid crystal driving voltage (VLCD). Adjust VLCD to show the best contrast.
- 4.4.2 It is an indispensable condition to drive LCD's within the specified voltage limit since the higher voltage then the limit cause the shorter LCD life. An electrochemical reaction due to direct current causes LCD's undesirable deterioration, so that the use of direct current drive should be avoided.
- 4.4.3 Response time will be extremely delayed at lower temperature than the operating temperature range and on the other hand at higher temperature LCD's show dark color in them. However those phenomena do not mean malfunction or out of order with LCD's, which will come back in the specified operating temperature.
- 4.4.4 If the display area is pushed hard during operation, the display will become abnormal. However, it will return to normal if it is turned off and then back on.
- 4.4.5 A slight dew depositing on terminals is a cause for electro-chemical reaction resulting in terminal open circuit. Usage under the maximum operating temperature, 50%RH or less is required.
- 4.4.6 Input logic voltage before apply analog high voltage such as LCD driving voltage when power on. Remove analog high voltage before logic voltage when power off the module. Input each signal after the positive/negative voltage becomes stable.
- 4.4.7 Please keep the temperature within the specified range for use and storage. Polarization degradation, bubble generation or polarizer peel-off may occur with high temperature and high humidity.

4.5 Safety

- 4.5.1 It is recommended to crush damaged or unnecessary LCDs into pieces and wash them off with solvents such as acetone and ethanol, which should later be burned.
- 4.5.2 If any liquid leaks out of a damaged glass cell and comes in contact with the hands, wash off thoroughly with soap and water.

4.6 Limited Warranty

Unless agreed between Multi-Inno and the customer, Multi-Inno will replace or repair any of its LCD modules which are found to be functionally defective when inspected in accordance with Multi-Inno LCD acceptance standards (copies available upon request) for a period of one year from date of production. Cosmetic/visual defects must be returned to Multi-Inno within 90 days of shipment. Confirmation of such date shall be based on data code on product. The warranty liability of Multi-Inno limited to repair and/or replace on the terms set forth above. Multi-Inno will not be responsible for any subsequent or consequential events.

4.7 Return LCM under warranty

4.7.1 No warranty can be granted if the precautions stated above have been disregarded. The typical examples of violations are :

4.7.1.1 - Broken LCD glass.

4.7.1.2 - PCB eyelet is damaged or modified.

4.7.1.3 -PCB conductors damaged.

4.7.1.4 - Circuit modified in any way, including addition of components.

4.7.1.5 - PCB tampered with by grinding, engraving or painting varnish.

4.7.1.6 - Soldering to or modifying the bezel in any manner.

4.7.2 Module repairs will be invoiced to the customer upon mutual agreement. Modules must be returned with sufficient description of the failures or defects. Any connectors or cable installed by the customer must be removed completely without damaging the PCB eyelet, conductors and terminals.

■ PACKING SPECIFICATION

Please consult our technical department for detail information.

■ PRIOR CONSULT MATTER

- 1 For Multi-Inno standard products, we keep the right to change material, process ... for improving the product property without prior notice to our customer.
- 2 For OEM products, if any changes are needed which may affect the product property, we will consult with our customer in advance.
- 3 If you have special requirement about reliability condition, please let us know before you start the test on our samples.