
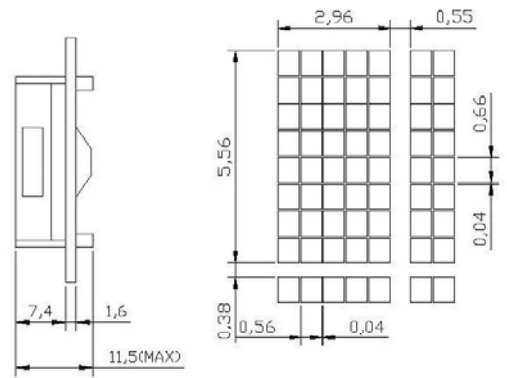


MI1602A3

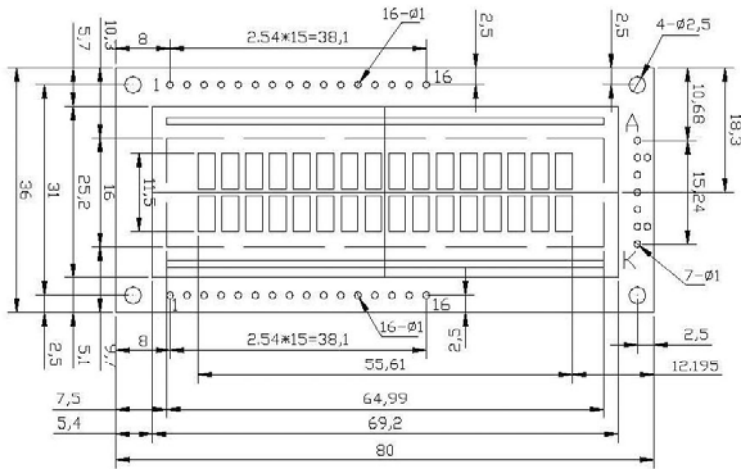

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
VSS	VDD	VO	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	A	K

NOTE: Unmarked Tolerance  $\pm 0.2\text{mm}$

LCD MODULE	M0550	REV	A
MULTI-INNO TECHNOLOGY CO., LTD			
DRAWN BY:	TYPE: MI1602A3	SCALE:	/
CHECKED BY:	NUMBER:	UNIT:	MM
APPROVED BY:	DRAWING NO: A-1	SHEET	/ OF /

General Description

- 16 Characters x 2 lines STN Grey Positive Transflective character LCD Module.
- Viewing Angle: 6 O'clock direction.
- Driving duty: 1/16 Duty, 1/5 bias.
- 'SAMSUNG' KS0066U-00 LCD Controller & Driver or equivalent.
- 'SAMSUNG' KS0065 LCD Driver or equivalent.
- MPU interface.
- Power Supply: +5.0V.
- White LED Backlight (Side LED).