


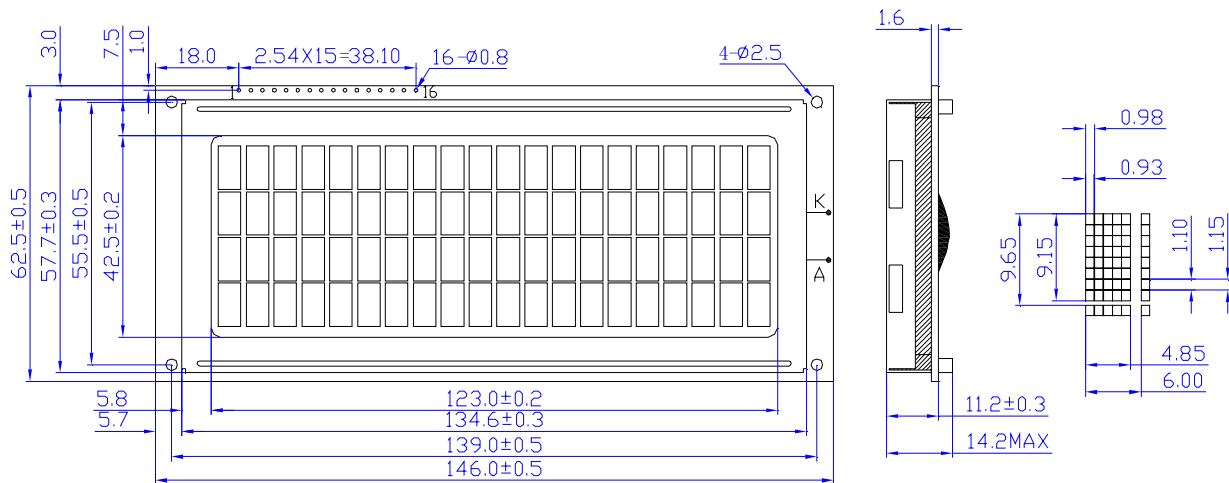

Pin Connections:

NOTES:

1. DISPLAY TYPE: Y/G STN , TRANSFLECTIVE
2. DRIVER METHOD: 1/32 DUTY, 1/5 BIAS, VDD=5.0V, VOP=4.2V
3. VIEWING DIRECTION: 0° CLOCK
4. IC DRIVER: ST7066+2xST7063 or the equivalent
5. OPERATING TEMP: -20°C ~ +70°C
6. STORAGE TEMP: -30°C ~ +80°C
7. LED BACKLIGHT: BOTTOM Y/G LEDA-LEDK=5V
8. ALL UNMARKED TOLERANCES: ±0.5mm
9. RoHS COMPLIANT

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
GND	VDD	V0	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	LED+	LED-

CUSTOMER APVL	CUSTOMER	DATE
DRAWN	SCALE	TITLE
DFTG CHK	UNIT	MI2004A-2
ENGR CHK	mm	MODEL
APPROVAL		DWG NO
MULTI-INNO TECHNOLOGY CO.,LTD.		PAGE 1/1