

ERC19264-1 Series


Graphic Module User Manual

EastRising Technology Co., Limited

Attention:


- A. Click "CONTENTS" list could be directed to the detail page. Click "Return to CONTENTS" could be directed to CONTENTS Page.
- B. Some specifications of IC are not listed in this manual. Please refer to the IC manual for more details.
- C. The drawing for related touch panel, schematic drawing, demo code is all available, please contact with our sales if you need.
- D. Please pay more attention to "INSPECTION CRITERIA" in this manual. We assume you already agree with these criterions when you place an order with us. No more recommendations.

REV	DESCRIPTION	RELEASE DATE
1.0	Preliminary Release	Jun-28-2012




CONTENTS

1. ORDERING INFORMATION	04
1.1 ERC19264-1 Series Table	04
1.2 ERC19264-1 Series Image	05
2. ATTRIBUTES	06
2.1 Display Attribute	06
2.2 Mechanical Attribute	06
2.3 Electrical Attribute	06
2.4 Optical Attribute	06
3. OUTLINE DRAWING	07
4. ELECTRICAL SPEC	08
4.1 Pin Configuration	08
4.2 Absolute Maximum Ratings	11
4.3 Electrical Characteristics	11
5. INSPECTION CRITERIA	12
5.1 Acceptable Quality Level	12
5.2 Definition of Lot	12
5.3 Condition of Cosmetic Inspection	12
5.4 Module Cosmetic Criteria	13
5.5 Screen Cosmetic Criteria (Non-Operating)	15
5.6 Screen Cosmetic Criteria (Operating)	16
6. PRECAUTIONS FOR USING	18
6.1 Handling Precautions	18
6.2 Power Supply Precautions	19
6.3 Operating Precautions	19
6.4 Mechanical/Environmental Precautions	19
6.5 Storage Precautions	19
6.6 Others	19



7. USING LCD MODULES	20
7.1 Liquid Crystal Display Modules	20
7.2 Installing LCD Modules	20
7.3 Precaution for Handling LCD Modules	21
7.4 Electro-Static Discharge Control-	21
7.5 Precaution for Soldering to EastRising LCM-	21
7.6 Precaution for Operation	22
7.7 Limited Warranty	22
7.8 Return Policy	22




1. ORDERING INFORMATION

1.1 ERC19264-1 Series Table

[>>Return to CONTENTS](#)

*The number of series table is in accordance with number of the below series image 1.2.

No.	Part Number	LCD Type	Backlight Color	Graphic & Font Color	Background Color
1	ERC19264FYG-1	FSTN Positive	Yellow Green Color	Dark Blue	Yellow Green Color
2	ERC19264SBS-1	STN Negative Blue	White Color	White Color	Blue Color
3	ERC19264FS-1	FSTN Positive	White Color	Black Color	White Color
4	ERC19264FR-1	FSTN Positive	Red Color	Black Color	Red Color
5	ERC19264FG-1	FSTN Positive	Green Color	Black Color	Green Color
6	ERC19264FB-1	FSTN Positive	Blue Color	Black Color	Blue Color
7	ERC19264FP-1	FSTN Positive	Purple Color	Black Color	Purple Color
8	ERC19264FAM-1	FSTN Positive	Amber Color	Black Color	Amber Color
9	ERC19264F7-1	FSTN Positive	RGB Color	Black Color	RGB Color
10	ERC19264DNYG-1	FFSTN Negative	Yellow Green Color	Yellow Green Color	Black Color
11	ERC19264DNS-1	FFSTN Negative	White Color	White Color	Black Color
12	ERC19264DNR-1	FFSTN Negative	Red Color	Red Color	Black Color
13	ERC19264DNG-1	FFSTN Negative	Green Color	Green Color	Black Color
14	ERC19264DNB-1	FFSTN Negative	Blue Color	Blue Color	Black Color
15	ERC19264DNP-1	FFSTN Negative	Purple Color	Purple Color	Black Color
16	ERC19264DNAM-1	FFSTN Negative	Amber Color	Amber Color	Black Color
17	ERC19264DN7-1	FFSTN Negative	RGB Color	RGB Color	Black Color




1.2 ERC19264-1 Series Image

>>Return to CONTENTS

*The number of series image is in accordance with number of the above series table 1.1.



17 To be developed

**2. ATTRIBUTES**

2.1 Display Attributes

[>>Return to CONTENTS](#)

ITEM	STANDARD VALUE	UNIT
Dot Matrix	192 x 64 Dots	--
Display Connector	FPC	--
FPC Connector	1.0 mm Pitch Horizontal SMT Bottom Contact 36 Pins	--
Operating Temperature	-20 ~ +70	°C
Storage Temperature	-30 ~ +80	°C
Touch Panel Optional	N/A	--
Font Chip Optional	N/A	--
*Sunlight Readable	No1, No3, No4, No5, No6, No7, No8, No9	--

*Number of sunlight readable is from 1.1 ERC19264-1 Series Table of the manual.

2.2 Mechanical Attributes

[>>Return to CONTENTS](#)

ITEM	STANDARD VALUE	UNIT
Outline Dimension with FPC Folded	106.49(W) × 46.66(H) × 5.2(T) (MAX)	mm
Visual Area	102.89(W) × 36.06(H)	mm
Active Area	97.486(W) × 32.462(H)	mm
Dot Size	0.458×0.458	mm
Dot Pitch	0.508 ×0.508	mm
Net Weight	± 15% grams (typical)	g

2.3 Electrical Attributes


[>>Return to CONTENTS](#)

ITEM	STANDARD VALUE	UNIT
IC Package	COG	--
Controller	IST3020	--
Interface	8080 8-bit Parallel, 6800 8-bit Parallel, 4-Wire SPI	--

2.4 Optical Attributes

[>>Return to CONTENTS](#)

ITEM	STANDARD VALUE	UNIT
LCD Type	Refer to 1.1 ERC19264-1 Series Table	--
Backlight Color	Refer to 1.1 ERC19264-1 Series Table	--
Viewing Direction	6:00	Clock
LCD Duty	1/64	Duty
LCD Bias	1/9	Bias



3. OUTLINE DRAWING

>>Return to CONTENTS

Customer: _____	Customer NO.: _____	Customer Approve By: _____	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th>REV.</th> <th>DESCRIPTION OF MODIFY</th> <th>MODIFY BY</th> <th>DATE</th> </tr> <tr> <td>A0</td> <td>1ST DESIGN</td> <td>JIM</td> <td>2012.03.29</td> </tr> <tr> <td>A1</td> <td></td> <td></td> <td></td> </tr> <tr> <td>A2</td> <td></td> <td></td> <td></td> </tr> </table>	REV.	DESCRIPTION OF MODIFY	MODIFY BY	DATE	A0	1 ST DESIGN	JIM	2012.03.29	A1				A2			
REV.	DESCRIPTION OF MODIFY	MODIFY BY	DATE																
A0	1 ST DESIGN	JIM	2012.03.29																
A1																			
A2																			

DOTS:192X64

VIEWING DIRECTION

BACKLIGHT


LED Backlight circuit
(NO. of LEDs=5pcs)

Pin No.	Signal	Pin No.	Signal
1	CSB6	19	OK
2	CSB6	20	OK
3	V4	21	03
4	V5	22	02
5	V2	23	D1
6	V1	24	D0
7	CSB6	25	CSB6
8	CAP2+	27	A0
9	CAP1+	28	RESET
10	CAP1+	29	CSB
11	CAP3+	30	V5S
12	V5P	31	V5S(FRONT)
13	V5P	32	V5S(FRONT)
14	V00	33	CSB(FRONT)
15	V00	34	CSB(FRONT)
16	PS	35	V5S(OWP)
17	07	35	V5S(OWP)
18	06	36	CSB(OWP)

Pixel Details
Scale:10:1

EastRising Technology Co.,Ltd
EastRising 旭日东方科技有限公司
www.lcd-china.com

LCM PART NUMBER: ERC19264-1 Series
DRAWN BY :JIM
CHECKED BY :
APPROVED BY :
REV: A0
SHEET: 1 OF 1
UNIT: MM
SIZE: A4




4. ELECTRICAL SPEC


4.1 Pin Configuration

>>Return to CONTENTS


Pin No.	Pin Name	Descriptions															
1	HPMB	148B145B142B Power supply control pin of the power supply circuit for LCD driver - HPMB = "H" : Normal mode - HPMB = "L" : High power supply mode Valid only at master operation. The pin fixed to HIGH or LOW at slave operation.															
2	C86	152B149B146 Microprocessor Interface Select input pin in parallel mode - C86 = "H" : 6800-series MPU interface - C86 = "L" : 8080-series MPU interface															
3-7	V4 V3 V2 V1 V0	LCD driver supply voltages The voltage determined by LCD pixel is impedance- converted by an operational amplifier for application. Voltages should have the following relationship; $V0 \geq V1 \geq V2 \geq V3 \geq V4 \geq VSS$ When the internal power circuit is active, these voltages are generated as following as following table according to the state of LCD bias <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>LCD Bias</th> <th>V1</th> <th>V2</th> <th>V3</th> <th>V5</th> </tr> </thead> <tbody> <tr> <td>1/9 Bias</td> <td>$(8/9) \times V0$</td> <td>$(7/9) \times V0$</td> <td>$(2/9) \times V0$</td> <td>$(1/9) \times V0$</td> </tr> <tr> <td>1/7 Bias</td> <td>$(6/7) \times V0$</td> <td>$(5/7) \times V0$</td> <td>$(2/7) \times V0$</td> <td>$(1/7) \times V0$</td> </tr> </tbody> </table>	LCD Bias	V1	V2	V3	V5	1/9 Bias	$(8/9) \times V0$	$(7/9) \times V0$	$(2/9) \times V0$	$(1/9) \times V0$	1/7 Bias	$(6/7) \times V0$	$(5/7) \times V0$	$(2/7) \times V0$	$(1/7) \times V0$
LCD Bias	V1	V2	V3	V5													
1/9 Bias	$(8/9) \times V0$	$(7/9) \times V0$	$(2/9) \times V0$	$(1/9) \times V0$													
1/7 Bias	$(6/7) \times V0$	$(5/7) \times V0$	$(2/7) \times V0$	$(1/7) \times V0$													
8	CAP2-	Capacitor 2 negative connection pin for voltage converter															
9	CAP2+	Capacitor 2 positive connection pin for voltage converter															
10	CAP1+	Capacitor 1 positive connection pin for voltage converter															
11	CAP1-	Capacitor 1 negative connection pin for voltage converter															
12	CAP3+	Capacitor 3 positive connection pin for voltage converter															
13	VPP	VPP is the power pin of embedded OTP (One-Time Programming) non-volatile memory circuit. Only during OTP programming cycle VPP should connect to an external power source (about 6.5V ± 0.25V). On the other cases, just keep this pin open.															
14	VOOUT	Voltage input / output pin Connect this pin to VSS through capacitor.															
15	VDD	Power Supply															
16	PS	Parallel / serial data input select input <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>PS</th> <th>Interface mode</th> <th>Chip select</th> <th>Data / instruction</th> <th>Data</th> <th>R/W</th> <th>Serial clock</th> </tr> </thead> <tbody> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	PS	Interface mode	Chip select	Data / instruction	Data	R/W	Serial clock								
PS	Interface mode	Chip select	Data / instruction	Data	R/W	Serial clock											



		H	Parallel	CS1B, CS2	A0	D0 to D	RDB WRB	-
		L	Serial	CS1B, CS2	A0	SID(D7)		SCLK(D6)
17-24	DB7-DB0	<p>8-bit bi-directional data bus that is connected to the standard 8-bit microprocessor data bus. When the serial interface selected (PS = "L");</p> <ul style="list-style-type: none"> - DB0 to DB5 : Keep VDD or VSS - DB6 : serial input clock (SCLK) - DB7 : serial input data (SID) <p>When chip select is not active, DB0 to DB7 may be high impedance.</p>						
25	E_RD	Read / Write execution control pin						
		C86	MPU Type	E_RDB	Description			
		H	6800-Series	E	Read / Write control input pin - RW = "H" : When E is "H", DB0 to DB7 are in an output status. - RW = "L" : The data on DB0 to DB7 are latched at the falling edge the E signal.			
L	8080-Series	RDB	Read enable clock input pin When / RDB is "L", DB0 to DB7 are in an output status.					
26	R/W_WR	Read / Write execution control pin						
		C86	MPU Type	RW_WRB	Description			
		H	6800-Series	RW	Read / Write control input pin - RW = "H" : read - RW = "L" : write			
L	8080-Series	WRB	Write enable clock input pin The data on DB0 to DB7 are					



						latched at the rising edge of the WRB signal.
27	AO	Register select input pin - A0 = "H" : DB0 to DB7 are display data - A0 = "L" : DB0 to DB7 are control data				
28	RESET	Reset input pin, When RESB is "L", initialization is executed.				
29	CSB	Chip select input pins Data / instruction I/O is enabled only when CS1B is "L" and CS2 is "H". when chip select is non-active, DB0 to DB7 may be high impedance				
30	VSS	Ground				
31	VCC(FONT)	Positive Power supply for font chip				
32	SO(FONT)	Serial data output for font chip				
33	SI(FONT)	Serial data input for font chip				
34	SCLK(FONT)	Serial clock input for font chip				
35	VSS(FONT)	Ground for font chip				
36	CS(FONT)	Chip enable input for font chip				



4.2 Absolute Maximum Ratings


[>>Return to CONTENTS](#)

ITEM	SYMBOL	MIN.	TYP.	MAX.	UNIT
Power Supply for Logic	VDD-VSS	-0.3	-	+7.0	V
Power Supply for LCD	VOUT	-0.3	-	+17.0	V
Input Voltage	VIN	-0.3	-	VDD+0.3	V
Supply Current for Backlight	ILED	-	-	125	mA

4.3 Electrical Characteristics

[>>Return to CONTENTS](#)

ITEM	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT
Power Supply for LCM	VDD-VSS	-	2.7	3.0	3.3	V
Input Voltage	VIL	L Level	VSS	-	0.2VDD	V
	VIH	H Level	0.8VDD	-	VDD	V
LCD Driving Voltage	V0-VSS	-	8.8	9.0	9.2	V
Supply Current for LCM	IDD	VDD=3.0V	-	-	800.0	uA
Supply Current for Backlight	ILED	-	50	75	100	mA
Power Supply for Backlight (White,Blue,Green Color)	VLED	-	2.9	3.0	3.2	V
Power Supply for Backlight (Red,Purple,Amber Color)	VLED	-	1.8	2.2	2.2	V
Power Supply for Backlight (Yellow Green Color)	VLED	-	1.8	2.2	2.2	V



5. INSPECTION CRITERIA

5.1 Acceptable Quality Level

[>>Return to CONTENTS](#)

Each lot should satisfy the quality level defined as follows

PARTITION	AQL	DEFINITION
A. Major	0.4%	Functional defective as product
B. Minor	1.5%	Satisfy all functions as product but not satisfy cosmetic stanard

5.2 Definition of Lot

One lot means the delivery quantity to customer at one time.

5.3 Condition of Cosmetic Inspection

[>>Return to CONTENTS](#)

◆ INSPECTION AND TEST


- FUNCTION TEST
- APPEARANCE INSPECTION
- PACKING SPECIFICATION

◆ INSPECTION CONDITION




- Put under the lamp (20w_iÁ2) at a distance 100mm from
- Tilt upright 45 degree by the front (back) to inspect LCD appearance.


◆ AQL INSPECTION LEVEL

- SAMPLING METHOD: MIL-STD-105D
- SAMPLING PLAN: SINGLE
- MAJOR DEFECT: 0.65% (MAJOR)
- MINOR DEFECT: 2.5% (MINOR)
- GENERAL LEVEL: II/NORMAL




NO.	Item	Judgment Criterion	Partition
1	Difference in Spec.	None allowed	Major
2	Pattern Peeling	No substrate pattern peeling and floating	Major
3	Soldering defects	No soldering missing	Major
		No soldering bridge	Major
		No cold soldering	Minor
4	Resist flaw on substrate	Invisible copper foil(\varnothing 0.5mm or more)on substrate pattern	Minor
5	Accretion of metallic Foreign matter	No soldering dust	Minor
		No accretion of metallic foreign matters(Not exceed \varnothing 0.2mm)	
6	Stain	No stain to spoil cosmetic badly	Minor
7	Plate discoloring	No plate fading,rusting and discoloring	Minor
8	Solder amount	<p>a. Soldering side of PCB</p> <p>Solder to form a 'Filet' all around the lead. Solder should not hide the lead form perfectly.(too much)</p> <p>b.Components side (In case of 'Through Hole PCB')</p> <p>Solder to reach the Components side of PCB</p>	Minor
	2.Flat packages	<p>Either 'toe'(A) or 'heel' (B) of the lead to be covered by 'Filet'</p> <p>Lead form to be assume over Solder.</p>	Minor
	3.Chips	<p>$(3/2) H \cong h \cong (1/2)H$</p>	Minor

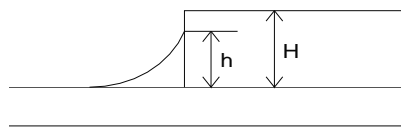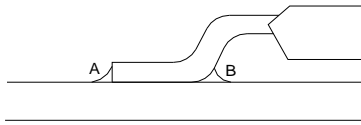






9	Backlight defects	<ol style="list-style-type: none">1.Light fails or flickers.(Major)2. Color and luminance do not correspond to specifications. (Major)3.Exceeds standards for display's blemishes, foreign matter, dark lines or scratches.(Minor)	See list ←
10	PCB defects	<p>Oxidation or contamination on connectors.*</p> <ol style="list-style-type: none">2. Wrong parts, missing parts, or parts not in specification.*3.Jumpers set incorrectly.(Minor)4.Solder(if any)on bezel,LED pad,zebra pad,or screw hole pad is not smooth.(Minor) <p>*Minor if display functions correctly.Major if the display fails.</p>	See list ←
11	Soldering defects	<ol style="list-style-type: none">1. Unmelted solder paste.2. Cold solder joints,missing solder connections,or oxidation.*3. Solder bridges causing short circuits.*4. Residue or solder balls.5. Solder flux is black or brown. <p>*Minor if display functions correctly.Major if the display fails.</p>	Minor




No.	Defect	Judgment Criterion	Partition	
1	Spots	In accordance with Screen Cosmetic Criteria (Operating) No.1.	Minor	
2	Lines	In accordance with Screen Cosmetic Criteria (Operation) No.2.	Minor	
3	Bubbles in Polarizer		Minor	
		Size: d mm		Acceptable Qty in active area
		d ≤ 0.3		Disregard
		0.3 < d ≤ 1.0		3
1.0 < d ≤ 1.5	1			
1.5 < d	0			
4	Scratch	In accordance with spots and lines operating cosmetic criteria, When the light reflects on the panel surface, the scratches are not to be remarkable.	Minor	
5	Allowable density	Above defects should be separated more than 30mm each other.	Minor	
6	Coloration	Not to be noticeable coloration in the viewing area of the LCD panels. Back-lit type should be judged with back-lit on state only.	Minor	
7	Contamination	Not to be noticeable.	Minor	





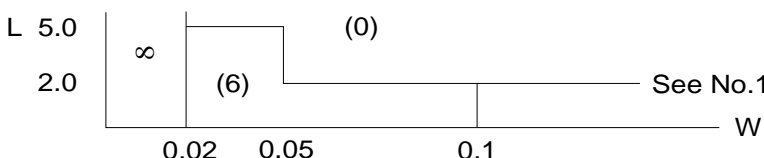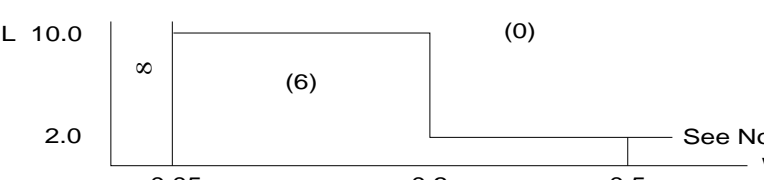No.	Defect	Judgment Criterion	Partition																				
1	Spots	<p>A) Clear</p> <table border="1" data-bbox="414 443 1362 663"> <thead> <tr> <th>Size:d mm</th> <th>Acceptable Qty in active area</th> </tr> </thead> <tbody> <tr> <td>$d \leq 0.1$</td> <td>Disregard</td> </tr> <tr> <td>$0.1 < d \leq 0.2$</td> <td>6</td> </tr> <tr> <td>$0.2 < d \leq 0.3$</td> <td>2</td> </tr> <tr> <td>$0.3 < d$</td> <td>0</td> </tr> </tbody> </table> <p>Note: Including pin holes and defective dots which must be within one pixel Size.</p> <p>B) Unclear</p> <table border="1" data-bbox="414 792 1362 1010"> <thead> <tr> <th>Size:d mm</th> <th>Acceptable Qty in active area</th> </tr> </thead> <tbody> <tr> <td>$d \leq 0.2$</td> <td>Disregard</td> </tr> <tr> <td>$0.2 < d \leq 0.5$</td> <td>6</td> </tr> <tr> <td>$0.5 < d \leq 0.7$</td> <td>2</td> </tr> <tr> <td>$0.7 < d$</td> <td>0</td> </tr> </tbody> </table>	Size:d mm	Acceptable Qty in active area	$d \leq 0.1$	Disregard	$0.1 < d \leq 0.2$	6	$0.2 < d \leq 0.3$	2	$0.3 < d$	0	Size:d mm	Acceptable Qty in active area	$d \leq 0.2$	Disregard	$0.2 < d \leq 0.5$	6	$0.5 < d \leq 0.7$	2	$0.7 < d$	0	Minor
Size:d mm	Acceptable Qty in active area																						
$d \leq 0.1$	Disregard																						
$0.1 < d \leq 0.2$	6																						
$0.2 < d \leq 0.3$	2																						
$0.3 < d$	0																						
Size:d mm	Acceptable Qty in active area																						
$d \leq 0.2$	Disregard																						
$0.2 < d \leq 0.5$	6																						
$0.5 < d \leq 0.7$	2																						
$0.7 < d$	0																						
2	Lines	<p>A) Clear</p>  <p>Note: () – Acceptable Qty in active area L - Length (mm) W -Width(mm) ∞-Disregard</p> <p>B) Unclear</p> 	Minor																				

‘Clear’ = The shade and size are not changed by Vo.


‘Unclear’ = The shade and size are changed by Vo.



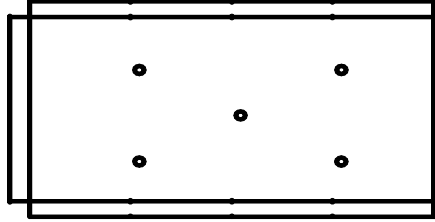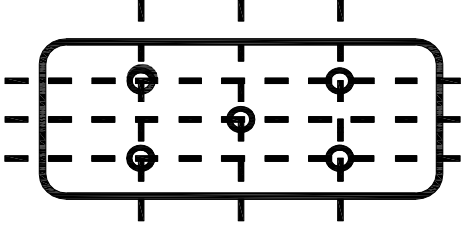No.	Defect	Judgment Criterion	Partition
3	Rubbing line	Not to be noticeable.	
4	Allowable density	Above defects should be separated more than 10mm each other.	Minor
5	Rainbow	Not to be noticeable.	Minor
6	Dot size	To be 95%~105%of the dot size (Typ.) in drawing. Partial defects of each dot (ex.pin-hole) should be treated as'spot'. (see Screen Cosmetic Criteria (Operating) No.1)	Minor
7	Brightness (only back-lit Module)	Brightness Uniformity must be $B_{MAX}/B_{MIN} \leq 2$ - B_{MAX} :Max.value by measure in 5 points - B_{MIN} : Min.value by measure in 5 points Divide active area into 4 vertically and horizontally. Measure 5 points shown in the following figure. 	Minor
8	Contrast Uniformity	Contrast Uniformity must be $B_{mAX}/B_{mIN} \leq 2$ Measure 5 points shown in the following figure. Dashed lines divide active area into 4 vertically and horizontally. Measuring points are located at the inter-sections of dashed line.  Note: B_{MAX} – Max.value by measure in 5 points. B_{MIN} – Min.value by measure in 5 points. O – Measuring points in $\varnothing 10\text{mm}$.	Minor

Note:

- (1) Size : $d = (\text{long length} + \text{short length}) / 2$
- (2) The limit samples for each item have priority.
- (3) Complexed defects are defined item by item, but if the number of defects are defined in above table, the total number should not exceed 10.



(4) In case of 'concentration', even the spots or the lines of 'disregarded' size should not be allowed. Following three situations

Should be treated as 'concentration'.


- 7 or over defects in circle of \varnothing 5mm.
- 10 or over defects in circle of \varnothing 10mm
- 20 or over defects in circle of \varnothing 20mm

6. PRECAUTIONS FOR USING

6.1 Handling Precautions

>>Return to CONTENTS

- ◆ This device is susceptible to Electro-Static Discharge (ESD) damage. Observe Anti-Static precautions.
- ◆ EastRising display panel is made of glass. Do not subject it to a mechanical shock by dropping it or impact.
- ◆ If EastRising display panel is damaged and the liquid crystal substance leaks out, be sure not to get any in your mouth. If the substance contacts your skin or clothes, wash it off using soap and water.
- ◆ Do not apply excessive force to the EastRising display surface or the adjoining areas since this may cause the color tone to vary.
- ◆ The polarizer covering the EastRising display surface of the LCD module is soft and easily scratched. Handle this polarizer carefully.
- ◆ If EastRising display surface becomes contaminated, breathe on the surface and gently wipe it with a soft dry cloth. If it is heavily contaminated, moisten cloth with one of the following Isopropyl or alcohol.
- ◆ Solvents other than those above-mentioned may damage the polarizer. Especially, do not use the Water.
- ◆ Exercise care to minimize corrosion of the electrode. Corrosion of the electrodes is accelerated by water droplets, moisture condensation or a current flow in a high-humidity environment.
- ◆ Install the EastRising LCD Module by using the mounting holes. When mounting the LCD module make sure it is free of twisting, warping and distortion. In particular, do not forcibly pull or bend the cable or the backlight cable.
- ◆ Do not attempt to disassemble or process EastRising LCD module.
- ◆ NC terminal should be open. Do not connect anything.
- ◆ If the logic circuit power is off, do not apply the input signals.
- ◆ To prevent destruction of the elements by static electricity, be careful to maintain an optimum work environment.
 - Be sure to ground the body when handling EastRising LCD modules.
 - Tools required for assembling, such as soldering irons, must be properly grounded.
 - To reduce the amount of static electricity generated, do not conduct assembling and other work under dry conditions.
 - The LCD module is coated with a film to protect the display surface. Exercise care when peeling off this protective film since static electricity may be generated.



6.2 Power Supply Precautions

>>Return to CONTENTS

- ◆ Identify and, at all times, observe absolute maximum ratings for both logic and LC drivers. Note that there is some variance between models.
- ◆ Prevent the application of reverse polarity to VDD and VSS, however briefly.
- ◆ Use a clean power source free from transients. Power-up conditions are occasionally jolting and may exceed the maximum ratings of EastRising modules.
- ◆ The VDD power of EastRising module should also supply the power to all devices that may access the display. Don't allow the data bus to be driven when the logic supply to the module is turned off.

6.3 Operating Precautions

>>Return to CONTENTS

- ◆ DO NOT plug or unplug EastRising module when the system is powered up.
- ◆ Minimize the cable length between EastRising module and host MPU.
- ◆ For models with backlights, do not disable the backlight by interrupting the HV line. Unload inverters produce voltage extremes that may arc within a cable or at the display.
- ◆ Operate EastRising module within the limits of the modules temperature specifications.

6.4 Mechanical/Environmental Precautions

>>Return to CONTENTS

- ◆ Improper soldering is the major cause of module difficulty. Use of flux cleaner is not recommended as they may seep under the electrometric connection and cause display failure.
- ◆ Mount EastRising module so that it is free from torque and mechanical stress.
- ◆ Surface of the LCD panel should not be touched or scratched. The display front surface is an easily scratched, plastic polarizer. Avoid contact and clean only when necessary with soft, absorbent cotton dampened with petroleum benzene.
- ◆ Always employ anti-static procedure while handling EastRising module.
- ◆ Prevent moisture build-up upon the module and observe the environmental constraints for storage tem
- ◆ Do not store in direct sunlight
- ◆ If leakage of the liquid crystal material should occur, avoid contact with this material, particularly ingestion. If the body or clothing becomes contaminated by the liquid crystal material, wash thoroughly with water and soap

6.5 Storage Precautions

>>Return to CONTENTS


When storing the LCD modules, avoid exposure to direct sunlight or to the light of fluorescent lamps.

Keep EastRising modules in bags (avoid high temperature / high humidity and low temperatures below 0C
Whenever possible, EastRising LCD modules should be stored in the same conditions in which they were shipped from our company.

6.6 Others

>>Return to CONTENTS

Liquid crystals solidify under low temperature (below the storage temperature range) leading to defective orientation or the generation of air bubbles (black or white). Air bubbles may also be generated if the module



is subject to a low temperature.

If EastRising LCD modules have been operating for a long time showing the same display patterns, the display patterns may remain on the screen as ghost images and a slight contrast irregularity may also appear. A normal operating status can be regained by suspending use for some time. It should be noted that this phenomenon does not adversely affect performance reliability.

To minimize the performance degradation of the LCD modules resulting from destruction caused by static electricity etc., exercise care to avoid holding the following sections when handling the modules.

- Exposed area of the printed circuit board.
- Terminal electrode sections.

7. USING LCD MODULES

7.1 Liquid Crystal Display Modules

>>Return to CONTENTS


EastRising LCD is composed of glass and polarizer. Pay attention to the following items when handling.

- ◆ Please keep the temperature within specified range for use and storage. Polarization degradation, bubble generation or polarizer peel-off may occur with high temperature and high humidity.
- ◆ Do not touch, push or rub the exposed polarizers with anything harder than an HB pencil lead (glass, tweezers, etc.).
- ◆ N-hexane is recommended for cleaning the adhesives used to attach front/rear polarizers and reflectors made of organic substances which will be damaged by chemicals such as acetone, toluene, ethanol and isopropylalcohol.
- ◆ When EastRising display surface becomes dusty, wipe gently with absorbent cotton or other soft material like chamois soaked in petroleum benzine. Do not scrub hard to avoid damaging the display surface.
- ◆ Wipe off saliva or water drops immediately, contact with water over a long period of time may cause deformation or color fading.
- ◆ Avoid contacting oil and fats.
- ◆ Condensation on the surface and contact with terminals due to cold will damage, stain or dirty the polarizers. After products are tested at low temperature they must be warmed up in a container before coming in contact with room temperature air.
- ◆ Do not put or attach anything on EastRising display area to avoid leaving marks on.
- ◆ Do not touch the display with bare hands. This will stain the display area and degrade insulation between terminals (some cosmetics are determined to the polarizers).
- ◆ As glass is fragile. It tends to become or chipped during handling especially on the edges. Please avoid dropping or jarring.

7.2 Installing LCD Modules

>>Return to CONTENTS

- ◆ Cover the surface with a transparent protective plate to protect the polarizer and LC cell.
- ◆ When assembling the LCM into other equipment, the spacer to the bit between the LCM and the fitting plate should have enough height to avoid causing stress to the module surface, refer to the individual specifications for measurements. The measurement tolerance should be $\pm 0.1\text{mm}$.

**7.3 Precaution for Handling LCD Modules****>>Return to CONTENTS**

Since EastRising LCM has been assembled and adjusted with a high degree of precision, avoid applying excessive shocks to the module or making any alterations or modifications to it.

- ◆ Do not alter, modify or change the shape of the tab on the metal frame.
- ◆ Do not make extra holes on the printed circuit board, modify its shape or change the positions of components to be attached.
- ◆ Do not damage or modify the pattern writing on the printed circuit board.
- ◆ Absolutely do not modify the zebra rubber strip (conductive rubber) or heat seal connector.
- ◆ Except for soldering the interface, do not make any alterations or modifications with a soldering iron.
- ◆ Do not drop, bend or twist EastRising LCM.

7.4 Electro-Static Discharge Control**>>Return to CONTENTS**

Since this module uses a CMOS LSI, the same careful attention should be paid to electrostatic discharge as for an ordinary CMOS IC.

- ◆ Make certain that you are grounded when handling LCM.
- ◆ Before remove LCM from its packing case or incorporating it into a set, be sure the module and your body have the same electric potential.
- ◆ When soldering the terminal of LCM, make certain the AC power source for the soldering iron does not leak.
- ◆ When using an electric screwdriver to attach LCM, the screwdriver should be of ground potentiality to minimize as much as possible any transmission of electromagnetic waves produced sparks coming from the commutator of the motor.
- ◆ As far as possible make the electric potential of your work clothes and that of the work bench the ground potential.
- ◆ To reduce the generation of static electricity be careful that the air in the work is not too dried. A relative humidity of 50%-60% is recommended.

7.5 Precaution for Soldering to EastRising LCM**>>Return to CONTENTS**

- ◆ Observe the following when soldering lead wire, connector cable and etc. to the LCM.


-Soldering iron temperature : $280^{\circ}\text{C} \pm 10^{\circ}\text{C}$

-Soldering time: 3-4 sec.

-Solder: eutectic solder.

If soldering flux is used, be sure to remove any remaining flux after finishing to soldering operation. (This does not apply in the case of a non-halogen type of flux.) It is recommended that you protect the LCD surface with a cover during soldering to prevent any damage due to flux spatters.

- ◆ When soldering the electroluminescent panel and PC board, the panel and board should not be detached more than three times. This maximum number is determined by the temperature and time conditions mentioned above, though there may be some variance depending on the temperature of the soldering iron.
- ◆ When remove the electroluminescent panel from the PC board, be sure the solder has completely melted, the soldered pad on the PC board could be damaged.

**7.6 Precaution for Operation****>>Return to CONTENTS**

- ◆ Viewing angle varies with the change of liquid crystal driving voltage (VO). Adjust VO to show the best contrast.
- ◆ Driving the EastRising LCD in the voltage above the limit shortens its life.
- ◆ Response time is greatly delayed at temperature below the operating temperature range. However, this does not mean the LCD will be out of the order. It will recover when it returns to the specified temperature range.
- ◆ If EastRising display area is pushed hard during operation, the display will become abnormal. However, it will return to normal if it is turned off and then back on.
- ◆ Condensation on terminals can cause an electrochemical reaction disrupting the terminal circuit. Therefore, it must be used under the relative condition of 40°C, 50% RH.
- ◆ When turning the power on, input each signal after the positive/negative voltage becomes stable.

7.7 Limited Warranty**>>Return to CONTENTS**

Unless agreed between EastRising and customer, EastRising will replace or repair any of its LCD modules which are found to be functionally defective when inspected in accordance with EastRising LCD acceptance standards (copies available upon request) for a period of one year from date of shipments. Cosmetic/visual defects must be returned to EastRising within 90 days of shipment. Confirmation of such date shall be based on freight documents. The warranty liability of EastRising limited to repair and/or replacement on the terms set forth above. EastRising will not be responsible for any subsequent or consequential events.

7.8 Return Policy**>>Return to CONTENTS**

No warranty can be granted if the precautions stated above have been disregarded. The typical examples of violations are:

- Broken LCD glass.
- PCB eyelet damaged or modified.
- PCB conductors damaged.
- Circuit modified in any way, including addition of components.
- PCB tampered with by grinding, engraving or painting varnish.
- Soldering to or modifying the bezel in any manner.

Module repairs will be invoiced to the customer upon mutual agreement. Modules must be returned with sufficient description of the failures or defects. Any connectors or cable installed by the customer must be removed completely without damaging the PCB eyelet's, conductors and terminals

That's the end of the Manual**>>Return to CONTENTS**