



MULTI-INNO TECHNOLOGY CO., LTD.

www.multi-inno.com

LCD MODULE SPECIFICATION

Model : MI160128B

For Customer's Acceptance:

Customer	
Approved	
Comment	

Revision	1.1
Engineering	
Date	2012-08-08
Our Reference	



RECORDS OF REVISION

Date	Ver.	Edi.	Description	Page	Design by
26/08/2010	1.0		The sample spec	-	
08/08/2012	1.1		The second sample spec: modify driver IC	-	



Contents

1. SPECIFICATIONS

- 1.1 Features**
- 1.2 Mechanical Specifications**
- 1.3 Absolute Maximum Ratings**
- 1.4 DC Electrical Characteristics**
- 1.5 Optical Characteristics**
- 1.6 Backlight Characteristics**

2. MODULE STRUCTURE

- 2.1 Counter Drawing**
- 2.2 Interface Pin Description**
- 2.3 Timing Characteristics**

3. QUALITY ASSURANCE SYSTEM

- 3.1 Quality Assurance Flow Chart**
- 3.2 Inspection Specification**

4. RELIABILITY TEST

- 4.1 Reliability Test Condition**

5. PRECAUTION RELATING PRODUCT HANDLING

- 5.1 Safety**
- 5.2 Handling**
- 5.3 Storage**
- 5.4 Terms of Warranty**

Appendix: 1. LCM Drawing



1. SPECIFICATIONS

1.1 Features

Item	Standard Value
Display Type	160*128 Dots
LCD Type	STN Gray, Transflective, Positive, Extended Temp
Driver Condition	LCD Module : 1/64 Duty, 1/9 Bias
Viewing Direction	6 O'clock
Backlight	White EL B/L
Weight	155g
Interface	8-bit parallel data input
Other(controller / driver IC)	SAP1024B
ROHS	THIS PRODUCT CONFORMS THE ROHS OF PTC Detail information please refer web side : http://www.multi-inno.com

1.2 Mechanical Specifications

Item	Standard Value	Unit
Outline Dimension	129.0 (L)*104.5 (W)*14.0 (H)Max	mm
Viewing Area	101.0 (L)*82.09 (W)	mm
Active Area	95.96 (L)*76.76 (W)	mm
Dot Size	0.56 (L)*0.56 (W)	mm
Dot Pitch	0.60 (L)*0.60 (W)	mm

Note : For detailed information please refer to LCM drawing

1.3 Absolute Maximum Ratings

Item	Symbol	Condition	Min.	Max.	Unit
Power Supply Voltage	V _{DD}	-	-0.3	+7.0	V
Input Voltage	V _{IN}	-	-0.3	V _{DD} +0.3	V
Operating Temperature	T _{OP}	-	-20	70	°C
Storage Temperature	T _{ST}	-	-30	80	°C
Storage Humidity	H _D	Ta < 60 °C	-	90	%RH

1.4 DC Electrical Characteristics

 $V_{DD}=5.0\pm0.5V$, $V_{SS}=0V$, $T_a=25^{\circ}C$

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Logic Supply Voltage	V_{DD}	-	4.5	5.0	5.5	V
“H” Input Voltage	V_{IH}	-	$V_{DD}-2.2$	-	V_{DD}	V
“L” Input Voltage	V_{IL}	-	0	-	0.8	V
“H” Output Voltage	V_{OH}	-	$V_{DD}-0.3$	-	V_{DD}	V
“L” Output Voltage	V_{OL}	-	0	-	0.3	V
Supply Current	I_{dd}	$V_{DD}=5.0V$; $V_{OP}=12.7V$; Pattern= Horizontal line*1	-	6	10	mA
LCM Driver Voltage	$V_{OP}*2$	-20°C	13.3	13.5	13.7	V
		25°C	12.5	12.7	12.9	
		70°C	12.0	12.2	12.4	

NOTE: *1 The Maximum current display;

*2 The VOP test point is $V_{DD}-V_{LCD}$

1.5 Optical Characteristics

LCD Panel : 1/64Duty , 1/9Bias , $V_{LCD}=12V$, $T_a=25^{\circ}C$



Item		Symbol	Conditions	Min.	Typ.	Max.	Unit	Reference
Response Time	Rise	tr		-	90	135	ms	Note2
	Fall	tf		-	210	315		
Viewing angle range	Top	$\Theta Y+$	$C>2.0$, $\varnothing=270^{\circ}$	40	-	-	Deg.	Notes 1
	Bottom	$\Theta Y-$		40	-	-		
	Left	$\Theta X-$		45	-	-		
	Right	$\Theta X+$		45	-	-		
Contrast Ratio		C	$\theta=0^{\circ}$, $\varnothing=270^{\circ}$	4	6	-	-	Note 3
Average Brightness (with LCD) *2		IV	-	7	9	-	cd/m ²	Note 4
CIE Color Coordinate (With LCD)*2	X			0.31	0.36	0.41		
	Y			0.39	0.44	0.49		
Uniformity *1		ΔB		70	-	-	%	

Note 4 :

1 : $\Delta B=B(\min) / B(\max) * 100\%$

2 : Measurement Condition for Optical Characteristics:


- a : Environment: $25^{\circ}C \pm 5^{\circ}C$ / $60 \pm 20\%R.H$, no wind , dark room below 10 Lux at typical lamp current and typical operating frequency.
- b : Measurement Distance: 500 ± 50 mm , ($\theta=0^{\circ}$)
- c : Equipment: TOPCON BM-7 fast , (field 1°) , after 10 minutes operation.
- d : The uncertainty of the C.I.E coordinate measurement ± 0.01 , Average Brightness $\pm 4\%$

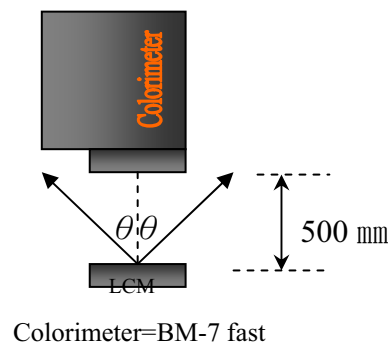

Note 1.

Optical characteristics-2

Viewing angle

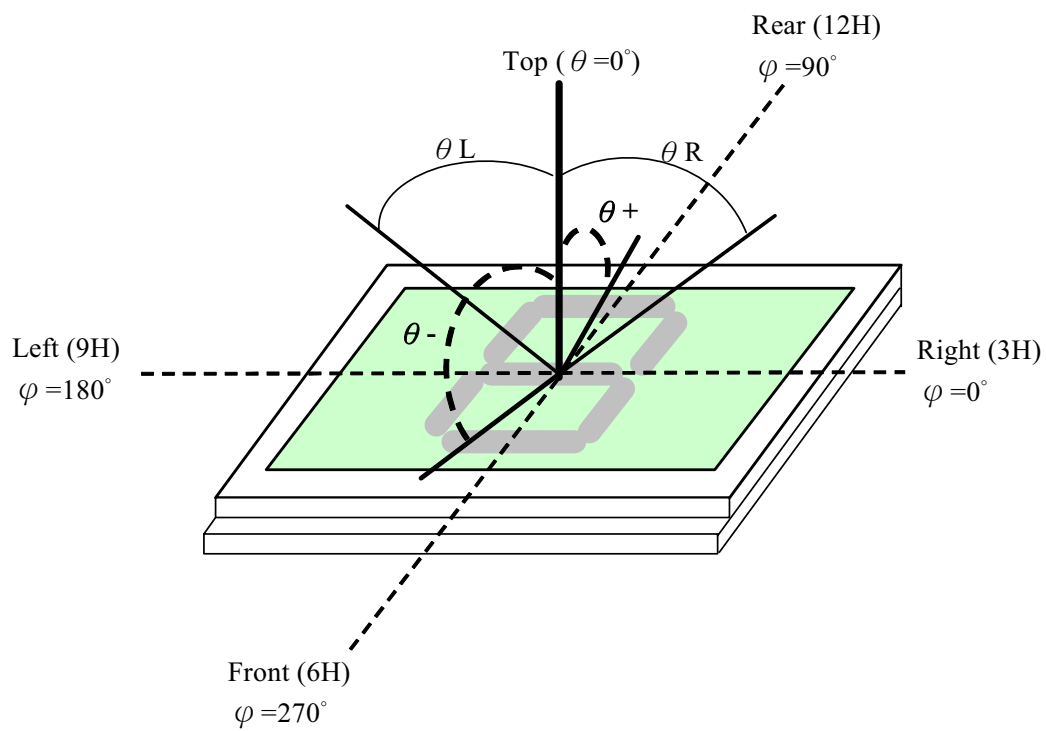


Viewing angle

Note 2.

Optical characteristics-3

Fig.2 Definition of response time

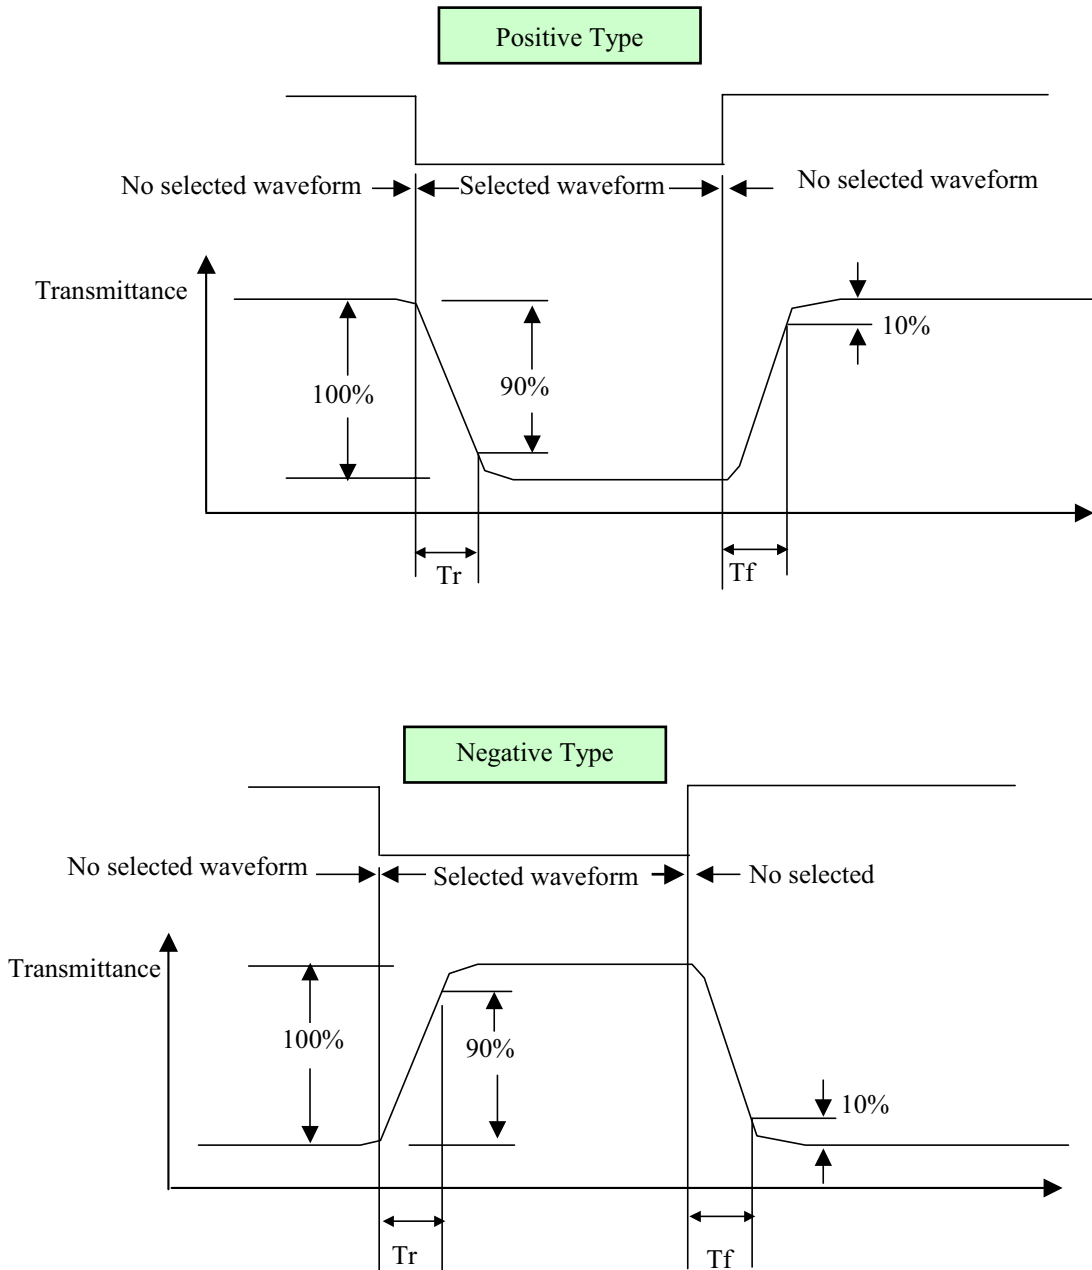

Electrical characteristics-2

※2 Drive waveform

V_{op} : Drive voltage


f_F : Frame frequency

$1/B$: Bias


f_D : Drive frequency

N : Duty

(1) Selected waveform

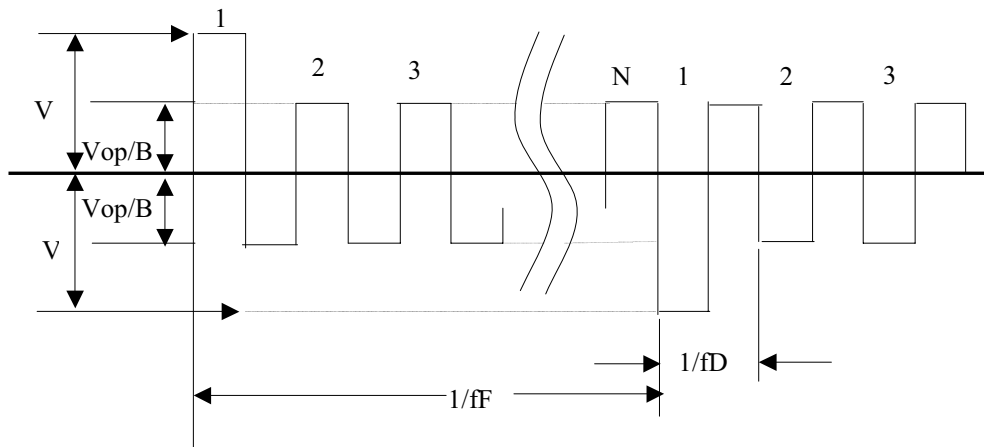


(2) Non- Selected wave form

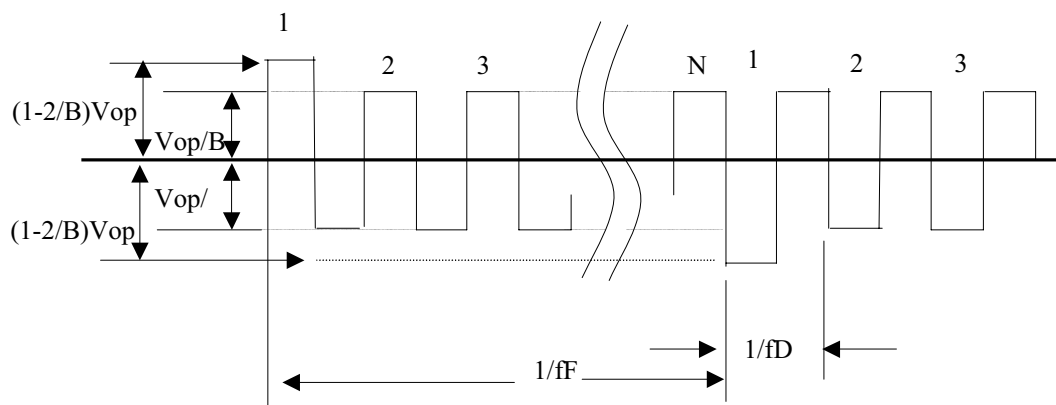

Note:

Frame frequency is defined as follows: Common side supply voltage peak - to - peak $/2 = 1$ period

Note 3. : Definition of Vth

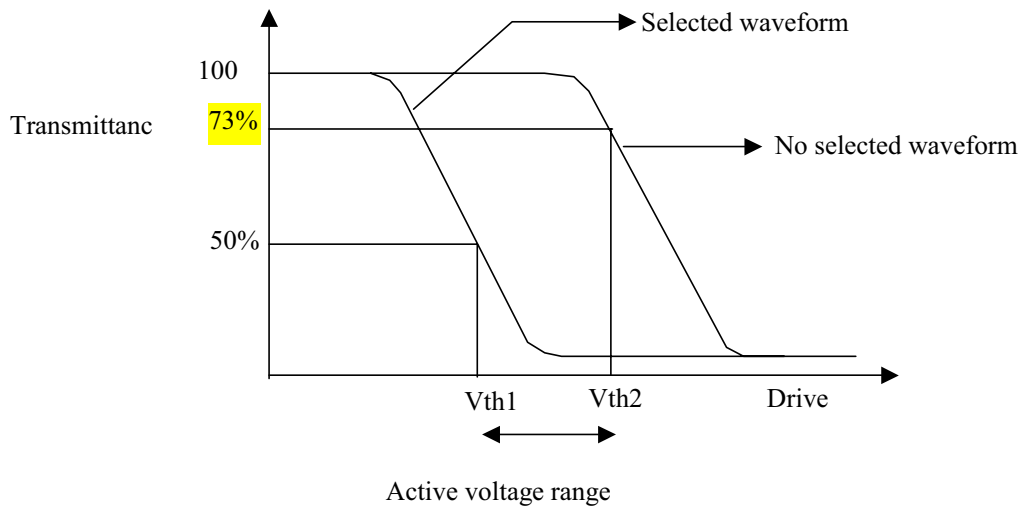


	Vth1	Vth2
View direction	10°	40°
Drive waveform	(Selected waveform)	(No selected waveform)
Transmittance	50%	73%

※1 Contrast ratio

= (Brightness in OFF state) / (Brightness in ON state)

Outline of Electro-Optical Characteristics Measuring System

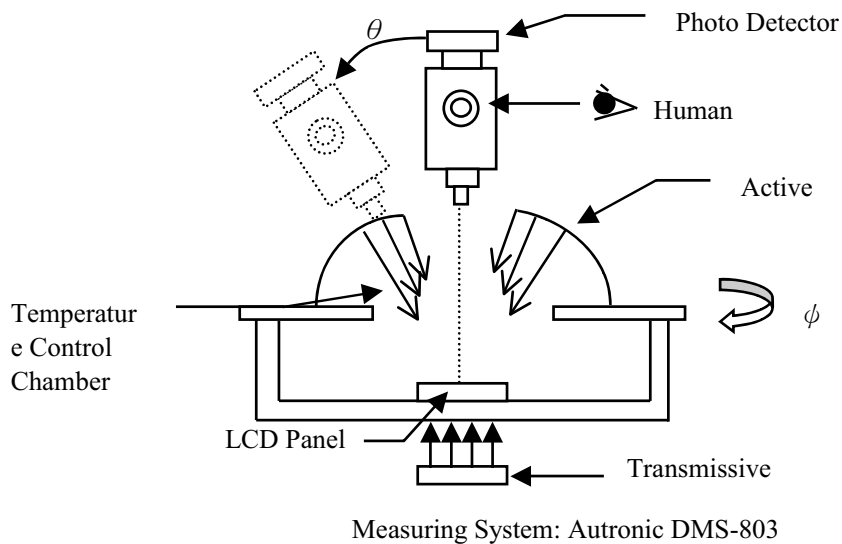



1.6 Backlight Characteristics

Maximum Ratings

Item	Symbol	Conditions	Ratings	Unit
Supply Voltage	V_{\max}	$T_A=25^{\circ}\text{C}$	170	Vrms
Supply Frequency	F_{\max}	$T_A=25^{\circ}\text{C}$	1000	Hz

Electrical / Optical Characteristics

Item	Symbol	Conditions	Min.	Typ.	Max.	Unit
Average Brightness (without LCD)	IV	Ta =25°C	48	60	-	cd/m²
CIE Color Coordinate (Without LCD)	X	VAC=110Vrms	-	0.3086	-	
	Y	Freq=400HZ	-	0.3926	-	
Color	White					


2. MODULE STRUCTURE

2.1 Counter Drawing

2.1.1 LCM Mechanical Diagram

* See Appendix


2.1.2 Block Diagram

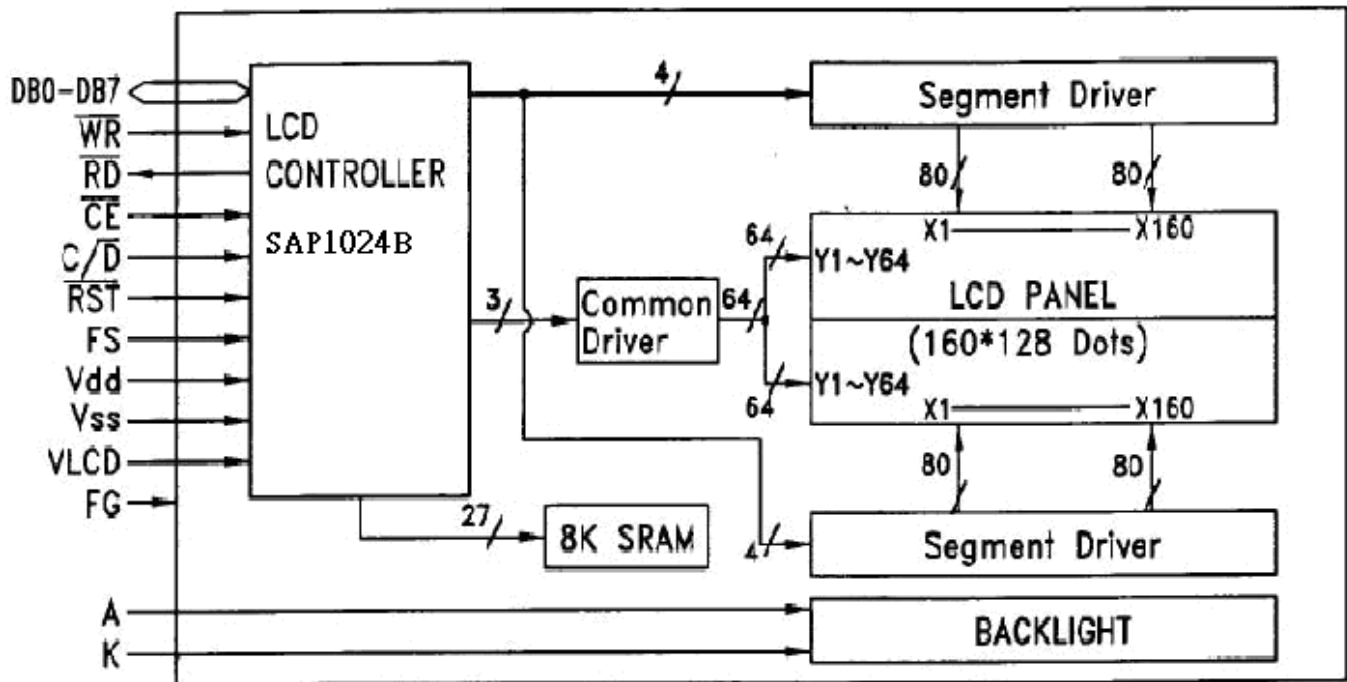


2.2 Interface Pin Description

Pin No.	Symbol	Function
1	FG	Frame ground (connected to metal bezel)
2	VSS	Power Supply (VSS=0)
3	V _{DD}	Power Supply (VDD>VSS)
4	V _{LCD} (V0)	Operating voltage for LCD (variable)
5	/WR	Data write (write data to the module at "L")
6	/RD	Data write (read data from the module at "L")
7	/CE	Chip enable for the module (active at "L")
8	C/D	C/D="H": read or write command C/D="L": read or write data
9	NC	No connection
10	RESET	Controller reset (module reset)
11	DB0	Data bus
12	DB1	Data bus
13	DB2	Data bus
14	DB3	Data bus
15	DB4	Data bus
16	DB5	Data bus
17	DB6	Data bus
18	DB7	Data bus
19	FS	Font select : connect to VDD: 6*8 Dots font Connect to VSS :8*8 Dots font
20	NC	No connection

Contrast Adjust

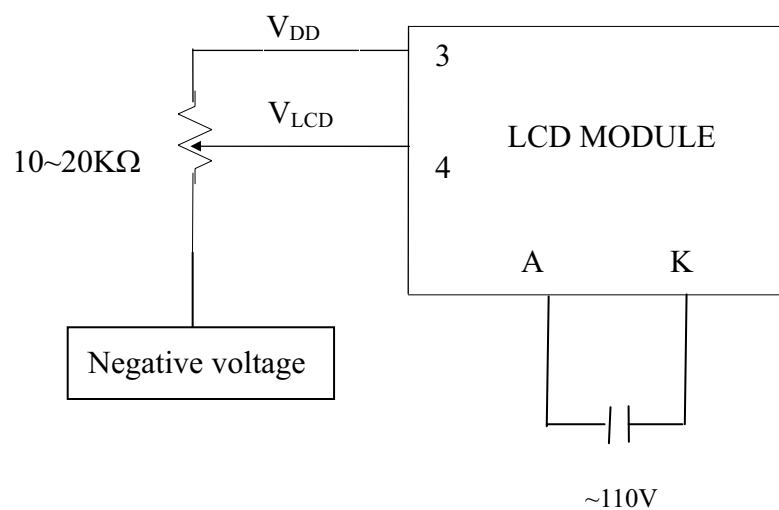

2.3 Timing Characteristics

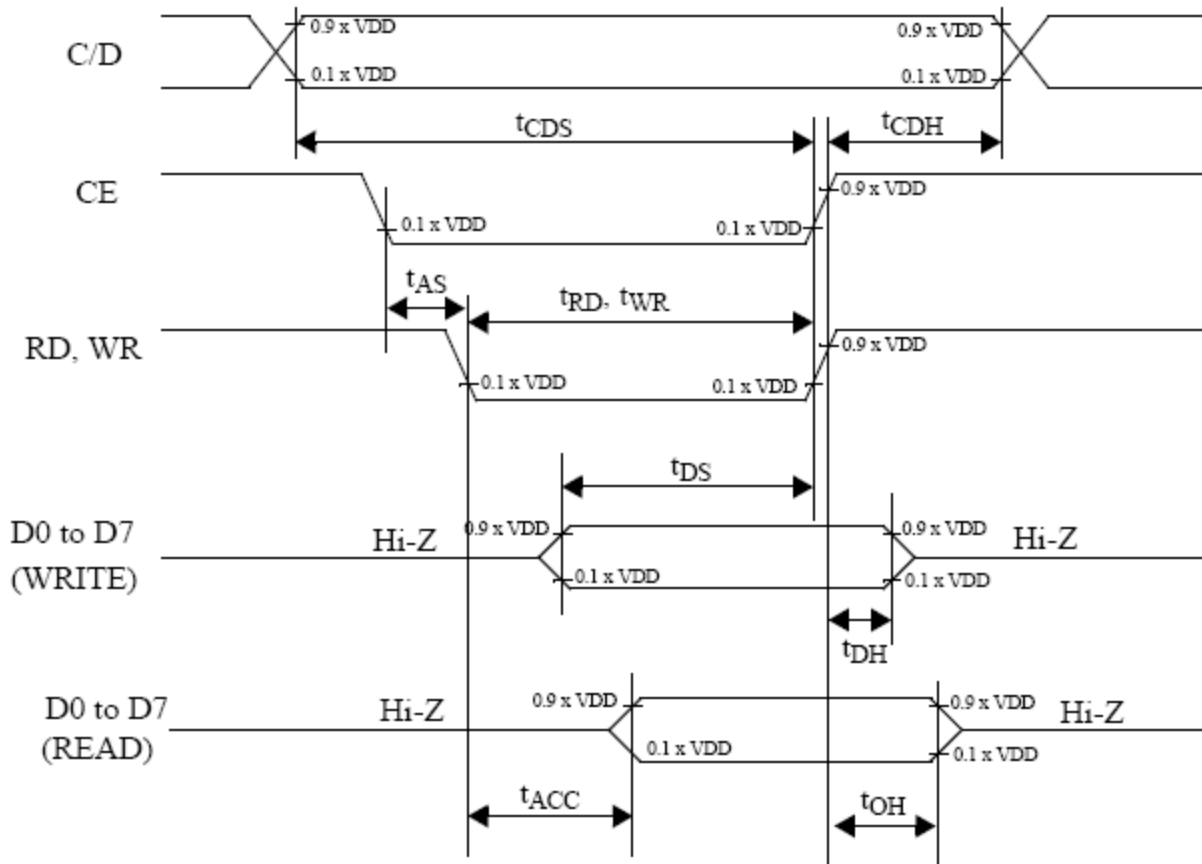



Unless otherwise noted, $V_{DD}=5.0V\pm10\%$, $V_{SS}=0V$, $T_a=25^\circ C$

ITEM	SYMBOL	TEST CONDITION	MIN.	MAX.	UNIT
C/D Set-Up Time	t_{CDS}	—	100	—	ns
C/D Hold Time	t_{CDH}	—	10	—	ns
RD, WR Pulse Width	t_{RD}, t_{WR}	—	80	—	ns
Data Set-Up Time	t_{DS}	—	80	—	ns
Data Hold Time	t_{DH}	—	40	—	ns
Access Time	t_{ACC}	—	—	150	ns
Output Hold Time	t_{OH}	—	10	50	ns

3. QUALITY ASSURANCE SYSTEM

3.1 Quality Assurance Flow Chart

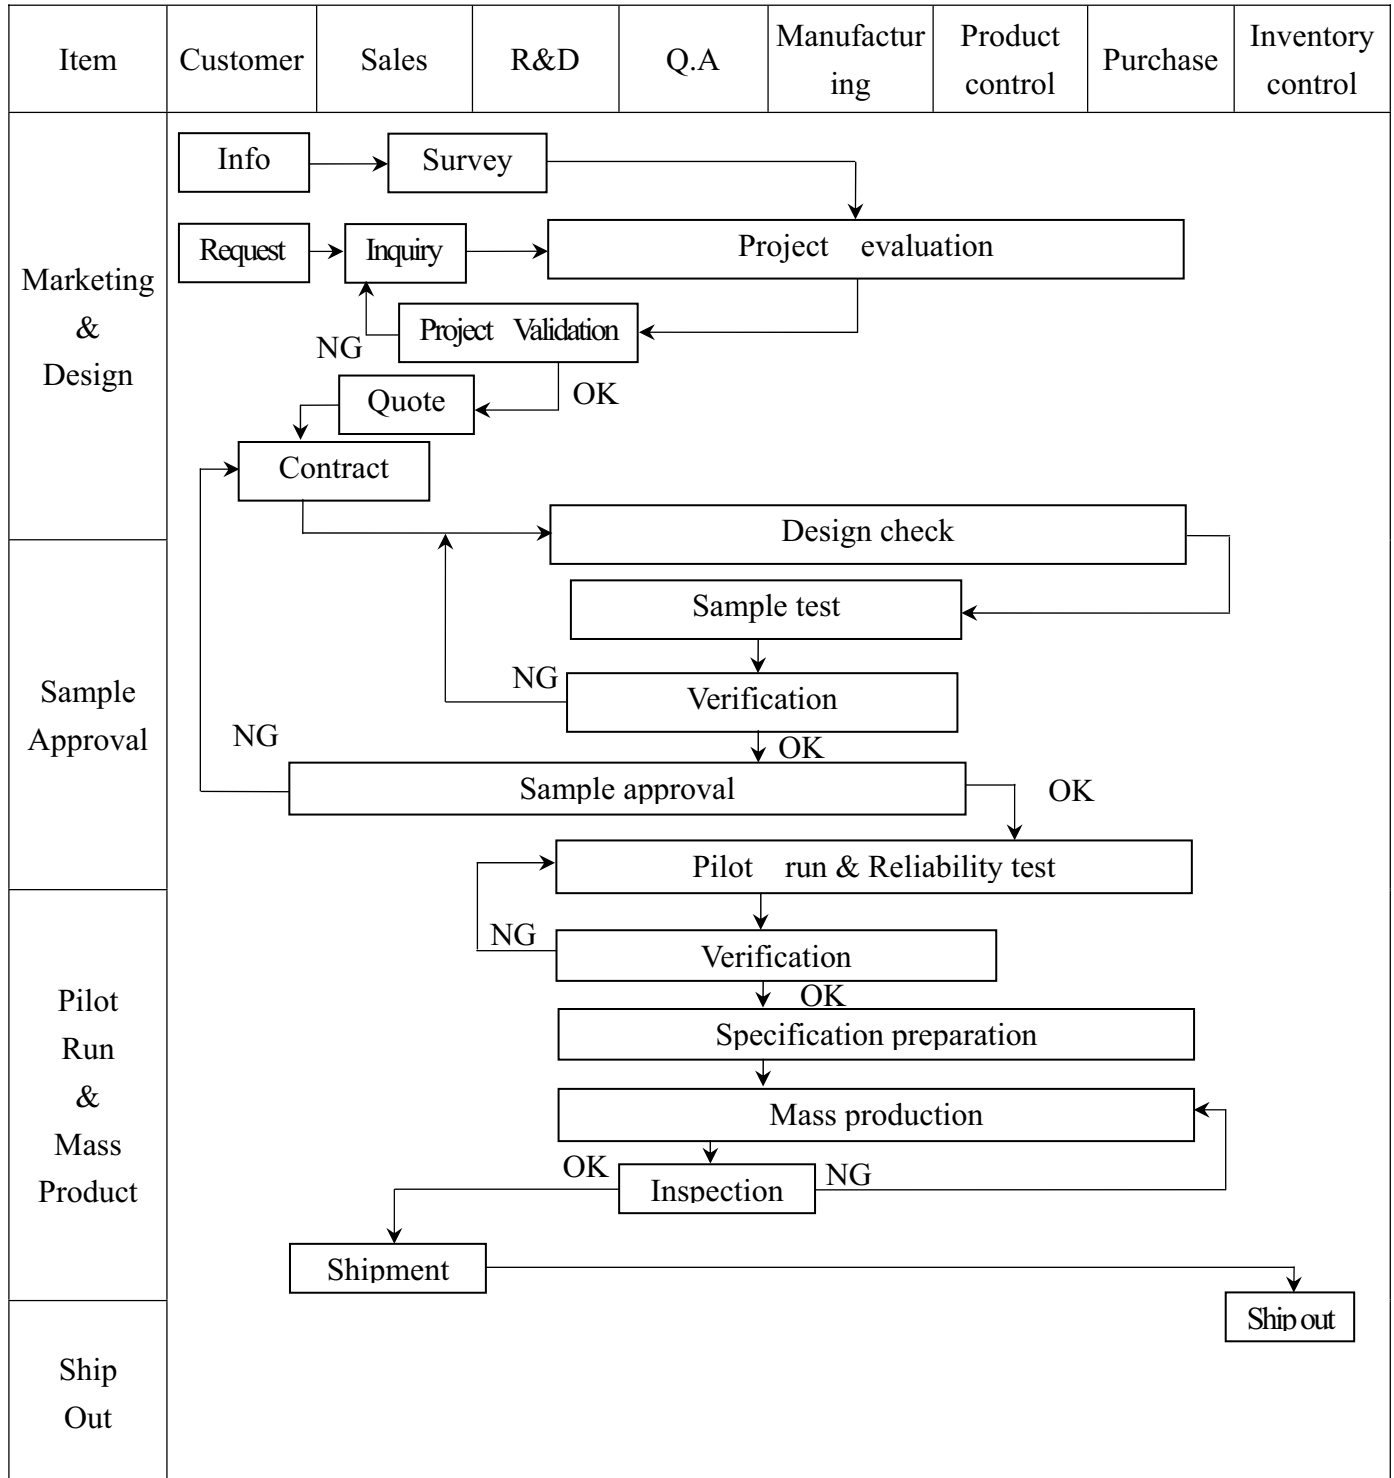

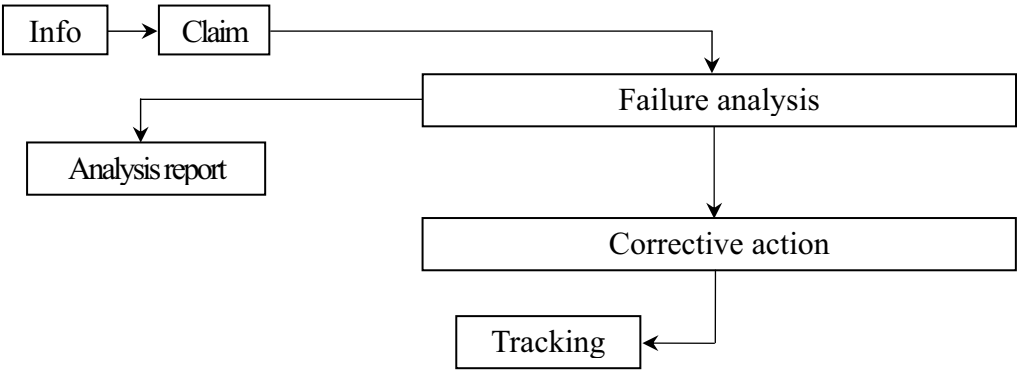Item	Customer	Sales	R&D	Q.A	Manufacturing	Product control	Purchase	Inventory control
Sales Service	 <pre> graph TD Info[Info] --> Claim[Claim] Claim --> Failure[Failure analysis] Claim --> Report[Analysis report] Failure --> Action[Corrective action] Action --> Tracking[Tracking] </pre>							
Q.A Activity	<div> 1. ISO 9001 Maintenance Activities 3. Equipment calibration 5. Standardization Management </div> <div> 2. Process improvement proposal 4. Education And Training Activities </div>							

3.2 Inspection Specification

◆Scope : The document shall be applied to LCD Module for Monotype and Color STN(Ver. B01).

◆Inspection Standard : MIL-STD-105E Table Normal Inspection Single Sampling Level II .

◆Equipment : Gauge 、 MIL-STD 、 Powertip Tester 、 Sample

◆Defect Level : Major Defect AQL : 0.4 ; Minor Defect : AQL : 1.5 .

◆OUT Going Defect Level : Sampling .

◆Manner of appearance test :

(1). The test be under 20W×2 fluorescent light ' and distance of view must be at 30 cm.

(2). Standard of inspection : (Unit : mm)

(3). The test direction is base on about around 45° of vertical line. (Fig. 1)

(4). Definition of area . (Fig. 2)

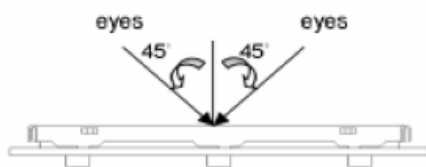


Fig.1

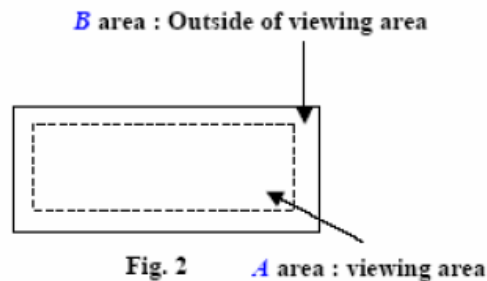




Fig. 2

◆ Specification:

NO	Item	Criterion	Level
01	Product condition	1. 1 The part number is inconsistent with work order of Production.	Major
		1. 2 Mixed production types.	Major
		1. 3 Assembled in inverse direction.	Major
02	Quantity	2. 1 The quantity is inconsistent with work order of production.	Major
03	Outline dimension	3. 1 Product dimension and structure must conform to Structure diagram.	Major
04	Electrical Testing	4. 1 Missing line character and icon.	Major
		4. 2 No function or no display.	Major
		4. 3 Output data is error.	Major
		4. 4 LCD viewing angle defect.	Major
		4. 5 Current consumption exceeds product specifications.	Major


◆Specification For Monotype and Color STN :

(Ver. B01)

NO	Item	Criterion	Level																																			
05	Black or white dot 、 scratch 、 contamination	<div> <div> 5. 1 Round type: 5. 1. 1 display only : <ul style="list-style-type: none"> • White and black spots on display ≤ 0.30 mm , no more than 4 white or black spots present. • Densely spaced : NO more than two spots or lines within 3 mm. 5. 1. 2 Non-display : <table> <tr> <th rowspan="2">Dimension (diameter : Φ)</th> <th colspan="2">Acceptance (Q'ty)</th> </tr> <tr> <th>A area</th> <th>B area</th> </tr> <tr> <td>$\Phi \leq 0.10$</td> <td>Accept no dense</td> <td rowspan="4">Ignore</td> </tr> <tr> <td>$0.10 < \Phi \leq 0.20$</td> <td>3</td> </tr> <tr> <td>$0.20 < \Phi \leq 0.30$</td> <td>2</td> </tr> <tr> <td>Total quantity</td> <td>4</td> </tr> </table> 5. 1. 3 Line type: <table> <tr> <th colspan="2">Dimension</th> <th colspan="2">Acceptance (Q'ty)</th> </tr> <tr> <th>Length (L)</th> <th>Width (W)</th> <th>A area</th> <th>B area</th> </tr> <tr> <td>---</td> <td>$W \leq 0.03$</td> <td>Accept no dense</td> <td rowspan="3">Ignore</td> </tr> <tr> <td>$L \leq 3.0$</td> <td>$0.03 < W \leq 0.05$</td> <td rowspan="2">4</td> </tr> <tr> <td>$L \leq 2.5$</td> <td>$0.05 < W \leq 0.075$</td> </tr> <tr> <td>---</td> <td>$W > 0.075$</td> <td colspan="2">As round type</td> </tr> </table> </div> <div> <div> Round type  $\Phi = (x+y)/2$ </div> <div> Line type  </div> </div> </div> <td rowspan="4">Minor</td>	Dimension (diameter : Φ)	Acceptance (Q'ty)		A area	B area	$\Phi \leq 0.10$	Accept no dense	Ignore	$0.10 < \Phi \leq 0.20$	3	$0.20 < \Phi \leq 0.30$	2	Total quantity	4	Dimension		Acceptance (Q'ty)		Length (L)	Width (W)	A area	B area	---	$W \leq 0.03$	Accept no dense	Ignore	$L \leq 3.0$	$0.03 < W \leq 0.05$	4	$L \leq 2.5$	$0.05 < W \leq 0.075$	---	$W > 0.075$	As round type		Minor
	Dimension (diameter : Φ)	Acceptance (Q'ty)																																				
		A area	B area																																			
	$\Phi \leq 0.10$	Accept no dense	Ignore																																			
$0.10 < \Phi \leq 0.20$	3																																					
$0.20 < \Phi \leq 0.30$	2																																					
Total quantity	4																																					
Dimension		Acceptance (Q'ty)																																				
Length (L)	Width (W)	A area	B area																																			
---	$W \leq 0.03$	Accept no dense	Ignore																																			
$L \leq 3.0$	$0.03 < W \leq 0.05$	4																																				
$L \leq 2.5$	$0.05 < W \leq 0.075$																																					
---	$W > 0.075$	As round type																																				
06	Polarizer Bubble	<table> <tr> <th rowspan="2">Dimension (diameter : Φ)</th> <th colspan="2">Acceptance (Q'ty)</th> </tr> <tr> <th>A area</th> <th>B area</th> </tr> <tr> <td>$\Phi \leq 0.20$</td> <td>Accept no dense</td> <td rowspan="4">Ignore</td> </tr> <tr> <td>$0.20 < \Phi \leq 0.50$</td> <td>3</td> </tr> <tr> <td>$0.50 < \Phi \leq 1.00$</td> <td>2</td> </tr> <tr> <td>$\Phi > 1.00$</td> <td>0</td> </tr> <tr> <td>Total quantity</td> <td>4</td> <td></td> </tr> </table>	Dimension (diameter : Φ)	Acceptance (Q'ty)		A area	B area	$\Phi \leq 0.20$	Accept no dense	Ignore	$0.20 < \Phi \leq 0.50$	3	$0.50 < \Phi \leq 1.00$	2	$\Phi > 1.00$	0	Total quantity	4		Minor																		
		Dimension (diameter : Φ)		Acceptance (Q'ty)																																		
			A area	B area																																		
		$\Phi \leq 0.20$	Accept no dense	Ignore																																		
		$0.20 < \Phi \leq 0.50$	3																																			
$0.50 < \Phi \leq 1.00$	2																																					
$\Phi > 1.00$	0																																					
Total quantity	4																																					



◆Specification For Monotype and Color STN :

(Ver. B01)

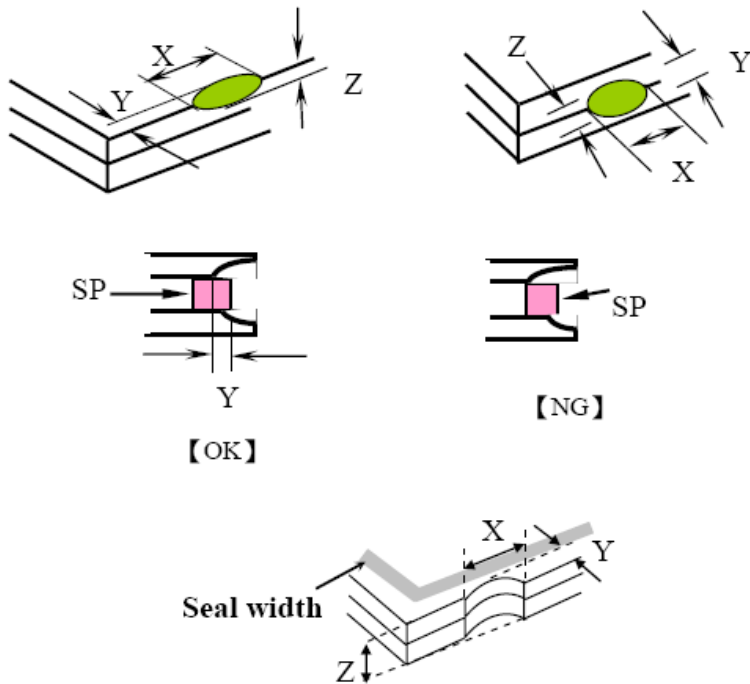NO	Item	Criterion	Level						
07	The crack of glass	<p>Symbols :</p> <div> <div> X : The length of crack Z : The thickness of crack t : The thickness of glass </div> <div> Y : The width of crack. W : terminal length a : LCD side length </div> </div>	Minor						
		<p>7.1 General glass chip :</p> <p>7.1.1 Chip on panel surface and crack between panels:</p> <div>  </div> <table> <tr> <th>X</th> <th>Y</th> <th>Z</th> </tr> <tr> <td>$\leq a$</td> <td>Crack can't enter viewing area</td> <td>$\leq 1/2 t$</td> </tr> <tr> <td>$\leq a$</td> <td>Crack can't exceed the half of SP width.</td> <td>$1/2 t < Z \leq 2 t$</td> </tr> </table>		X	Y	Z	$\leq a$	Crack can't enter viewing area	$\leq 1/2 t$
X	Y	Z							
$\leq a$	Crack can't enter viewing area	$\leq 1/2 t$							
$\leq a$	Crack can't exceed the half of SP width.	$1/2 t < Z \leq 2 t$							



◆Specification For Monotype and Color STN :

(Ver. B01)

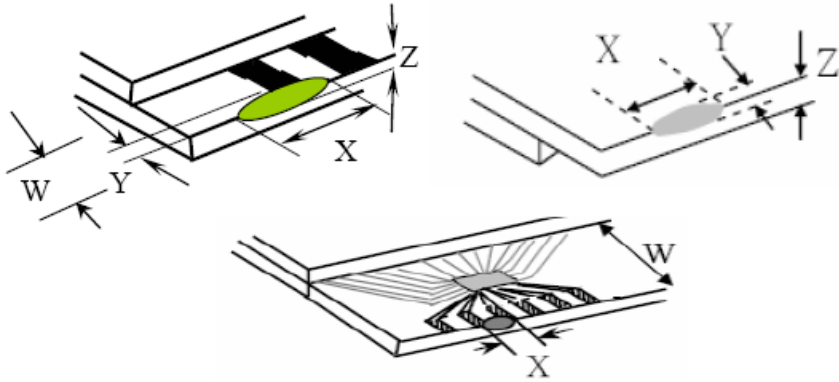NO	Item	Criterion	Level									
07	The crack of glass	<p>Symbols :</p> <p>X : The length of crack Z : The thickness of crack t : The thickness of glass</p> <p>Y : The width of crack. W : terminal length a : LCD side length</p> <hr/> <p>7.1.2 Corner crack :</p>  <table><tr><th>X</th><th>Y</th><th>Z</th></tr><tr><td>$\leq 1/5 a$</td><td>Crack can't enter viewing area</td><td>$Z \leq 1/2 t$</td></tr><tr><td>$\leq 1/5 a$</td><td>Crack can't exceed the half of SP width.</td><td>$1/2 t < Z \leq 2 t$</td></tr></table>	X	Y	Z	$\leq 1/5 a$	Crack can't enter viewing area	$Z \leq 1/2 t$	$\leq 1/5 a$	Crack can't exceed the half of SP width.	$1/2 t < Z \leq 2 t$	Minor
		X	Y	Z								
$\leq 1/5 a$	Crack can't enter viewing area	$Z \leq 1/2 t$										
$\leq 1/5 a$	Crack can't exceed the half of SP width.	$1/2 t < Z \leq 2 t$										
<p>7.2 Protrusion over terminal :</p> <p>7.2.1 Chip on electrode pad :</p>  <table><tr><th></th><th>X</th><th>Y</th><th>Z</th></tr><tr><td>Front</td><td>$\leq a$</td><td>$\leq 1/2 W$</td><td>$\leq t$</td></tr><tr><td>Back</td><td colspan="3">Neglect</td></tr></table>		X	Y	Z	Front	$\leq a$	$\leq 1/2 W$	$\leq t$	Back	Neglect		
	X	Y	Z									
Front	$\leq a$	$\leq 1/2 W$	$\leq t$									
Back	Neglect											

◆ Specification For Monotype and Color STN :

(Ver. B01)

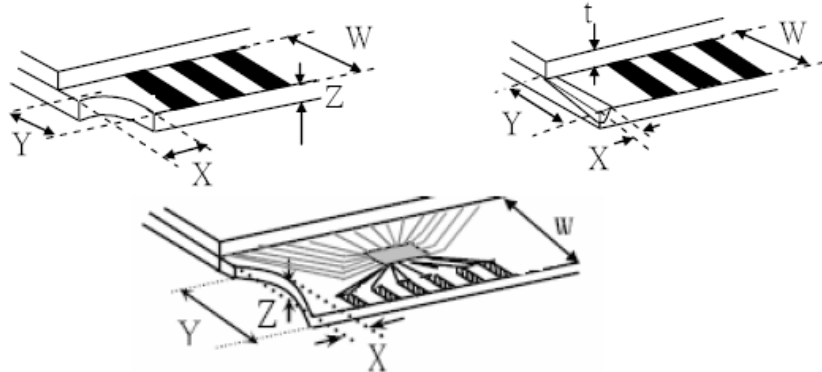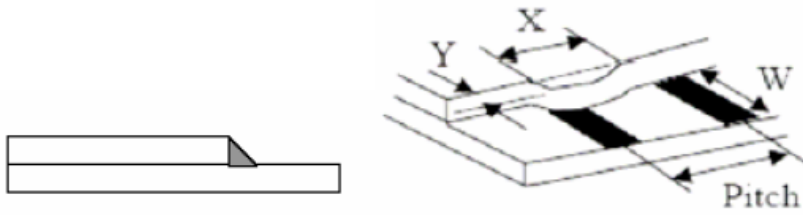NO	Item	Criterion	Level									
07	The crack of glass	<p>Symbols :</p> <div> <div> <p>X : The length of crack</p> <p>Z : The thickness of crack</p> <p>t : The thickness of glass</p> </div> <div> <p>Y : The width of crack.</p> <p>W : terminal length</p> <p>a : LCD side length</p> </div> </div>	Minor									
		<p>7.2.2 Non-conductive portion :</p>  <table border="1"> <thead> <tr> <th>X</th> <th>Y</th> <th>Z</th> </tr> </thead> <tbody> <tr> <td>$\leq 1/3 a$</td> <td>$\leq W$</td> <td>$\leq t$</td> </tr> </tbody> </table> <p>⊙ If the chipped area touches the ITO terminal, over 2/3 of the ITO must remain and be inspected according to electrode terminal specifications.</p> <p>7.2.3 Glass remain :</p>  <table border="1"> <thead> <tr> <th>X</th> <th>Y</th> <th>Z</th> </tr> </thead> <tbody> <tr> <td>$\leq a$</td> <td>$\leq 1/3 W$</td> <td>$\leq t$</td> </tr> </tbody> </table>		X	Y	Z	$\leq 1/3 a$	$\leq W$	$\leq t$	X	Y	Z
X	Y	Z										
$\leq 1/3 a$	$\leq W$	$\leq t$										
X	Y	Z										
$\leq a$	$\leq 1/3 W$	$\leq t$										

◆ Specification For Monotype and Color STN :

(Ver. B01)

NO	Item	Criterion	Level
08	Backlight elements	8. 1 Backlight can't work normally.	Major
		8. 2 Backlight doesn't light or color is wrong.	Major
		8. 3 Illumination source flickers when lit.	Major
09	General appearance	9. 1 Pin type must match type in specification sheet.	Major
		9. 2 No short circuits in components on PCB or FPC.	Major
		9. 3 Product packaging must the same as specified on packaging specification sheet.	Minor
		9. 4 The folding and peeled off in polarizer are not acceptable.	Minor
		9. 5 The PCB or FPC between B/L assembled distance (PCB or FPC) is ≤ 1.5 mm.	Minor



5. PRECAUTION RELATING PRODUCT HANDLING

5.1 SAFETY

- 5.1.1 If the LCD panel breaks , be careful not to get the liquid crystal to touch your skin.
- 5.1.2 If the liquid crystal touches your skin or clothes , please wash it off immediately by using soap and water.

5.2 HANDLING

- 5.2.1 Avoid any strong mechanical shock which can break the glass.
- 5.2.2 Avoid static electricity which can damage the CMOS LSI—When working with the module , be sure to ground your body and any electrical equipment you may be using.
- 5.2.3 Do not remove the panel or frame from the module.
- 5.2.4 The polarizing plate of the display is very fragile. So , please handle it very carefully ,do not touch , push or rub the exposed polarizing with anything harder than an HB pencil lead (glass , tweezers , etc.)
- 5.2.5 Do not wipe the polarizing plate with a dry cloth , as it may easily scratch the surface of plate.
- 5.2.6 Do not touch the display area with bare hands , this will stain the display area.
- 5.2.7 Do not use ketonics solvent & aromatic solvent. Use with a soft cloth soaked with a cleaning naphtha solvent.
- 5.2.8 To control temperature and time of soldering is $320\pm 10^{\circ}\text{C}$ and 3-5 sec.
- 5.2.9 To avoid liquid (include organic solvent) stained on LCM .


5.3 STORAGE

- 5.3.1 Store the panel or module in a dark place where the temperature is $25^{\circ}\text{C} \pm 5^{\circ}\text{C}$ and the humidity is below 65% RH.
- 5.3.2 Do not place the module near organics solvents or corrosive gases.
- 5.3.3 Do not crush , shake , or jolt the module.

5.4 TERMS OF WARRANTY

- 5.4.1 Applicable warrant period
The period is within thirteen months since the date of shipping out under normal using and storage conditions.
- 5.4.2 Unaccepted responsibility
This product has been manufactured to your company's specification as a part for use in your company's general electronic products. It is guaranteed to perform according to delivery specifications. For any other use apart from general electronic equipment , we cannot take responsibility if the product is used in nuclear power control equipment , aerospace equipment , fire and security systems or any other applications in which there is a direct risk to human life and where extremely high levels of reliability are required.

LCM Drawing

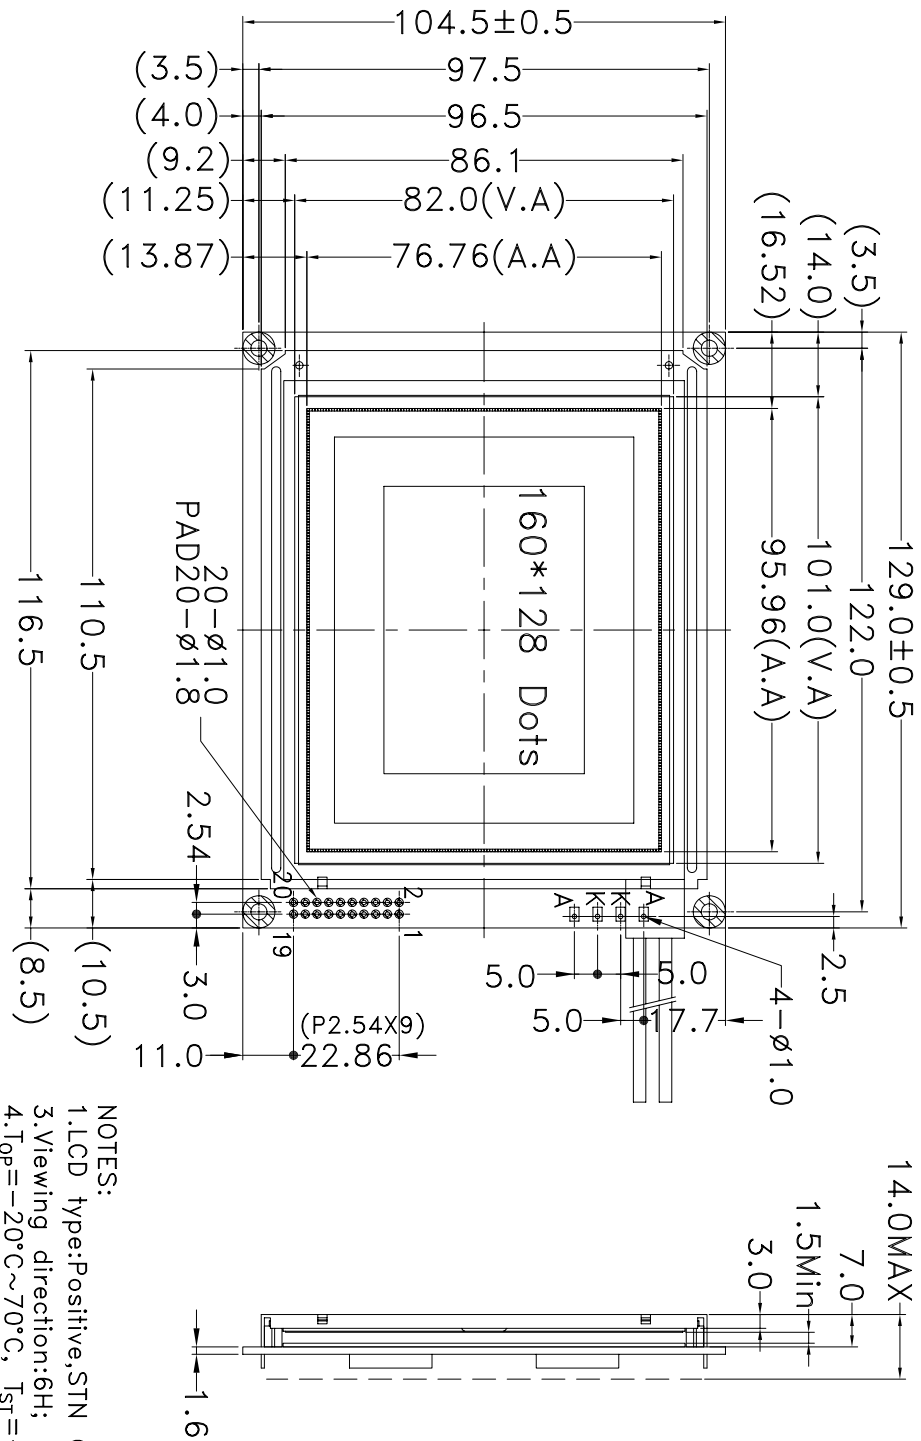

CUSTOMER APVL	CUSTOMER	DATE	TITLE
DRAWN	SCALE		MI160128B
DETG CHK	UNIT	mm	
ENGR CHK	MODEL		
APPROVAL			
MULTI-INNO TECHNOLOGY CO.,LTD.		DWG NO	PAGE
			1/1