


OUTLINE DIMENSION:



NO.	SYMBOL
1	GND
2	GND
3	/RESET
4	/WR
5	/RD
6	/RS(A0)
7	/CS
8	D15
9	D14
10	D13
11	D12
12	D11
13	D10
14	D9
15	D8
16	D7
17	D6
18	D5
19	D4
20	D3
21	D2
22	D1
23	D0
24	GND
25	VDD(2.9V)
26	VDD(2.9V)
27	GND
28	GND
29	LED+
30	LED-

- NOTES:
- DISPLAY TYPE: CSTN
  - VIEING DIRECTION: 6:00
  - MAIN LCD DRIVE IC: S6B33BC
  - POLARIZER MODE: TRANSMISSIVE/NEGATIVE
  - DRIVE METHOD: 1/160 DUTY 1/5 BIAS
  - VBAT: 3.2~5.5V VDD=2.9V  
Vop=17.6V
  - BACKLIGHT: 2CHIP-WHITE LED
  - OPERATING TEMP: -20 °C -- 70 °C
  - STORAGE TEMP: -30 °C -- 80 °C
  - UNMARKED TOLERANCE: ±0.30
  - IMPORTANT DIMENSION:
  - RoHS

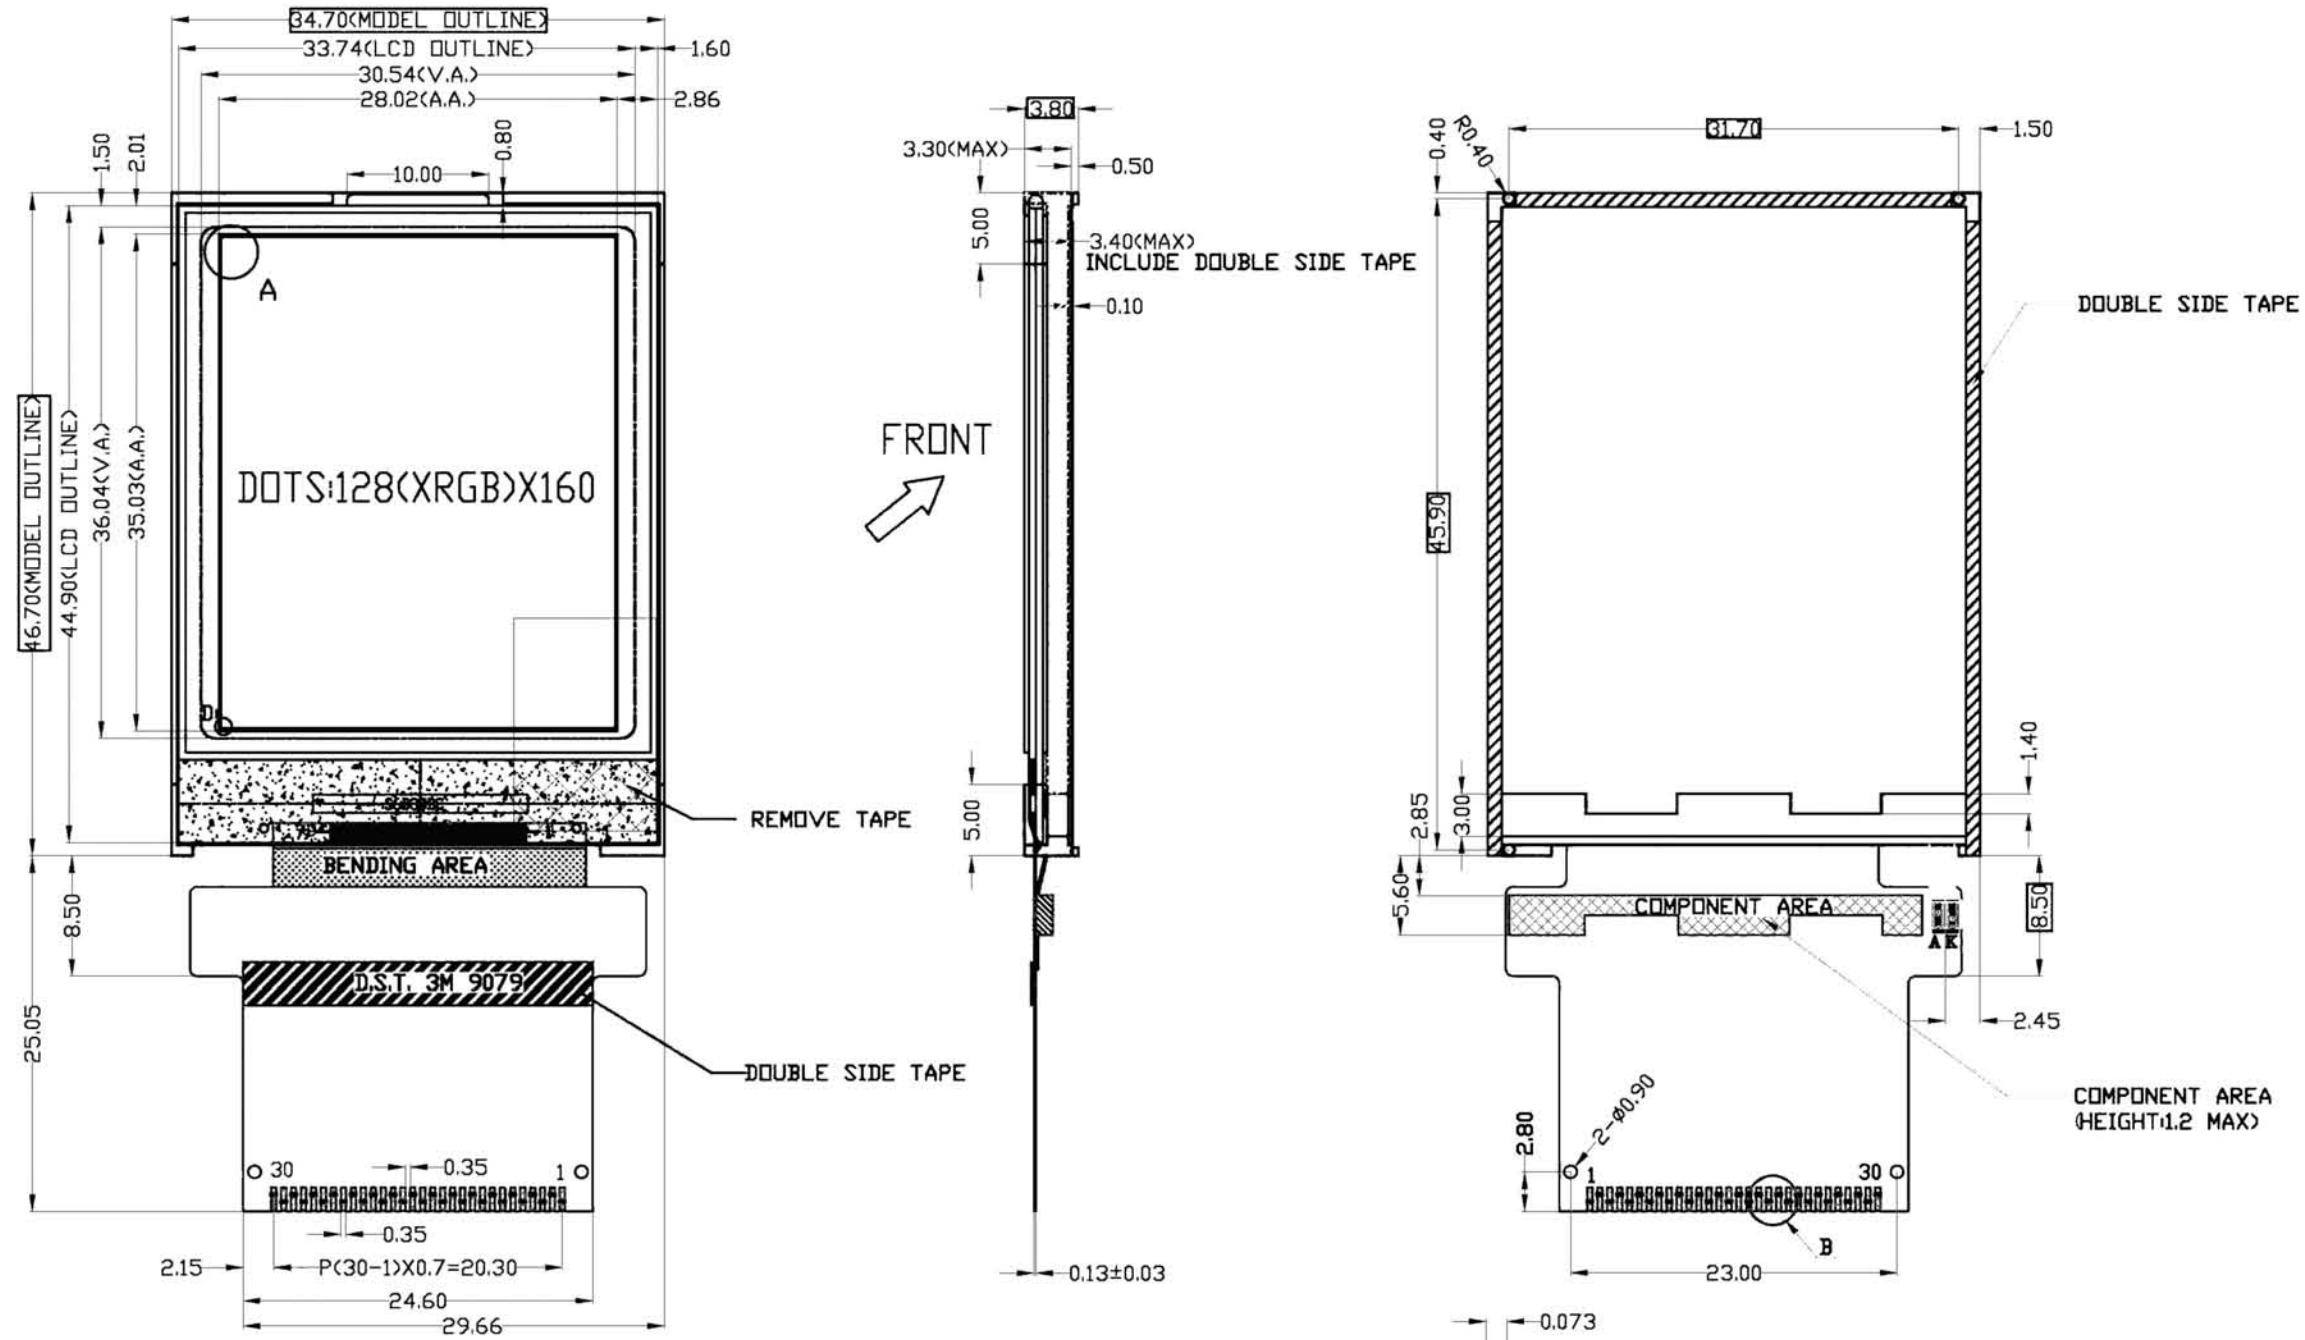