CUSTOMER APPROVED:	CUSTOMER'S MODEL NO.:	DATE:

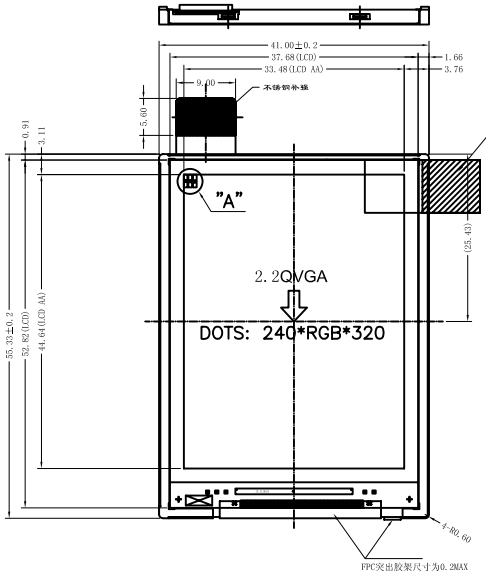

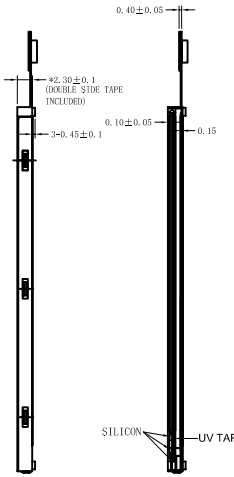

A-A

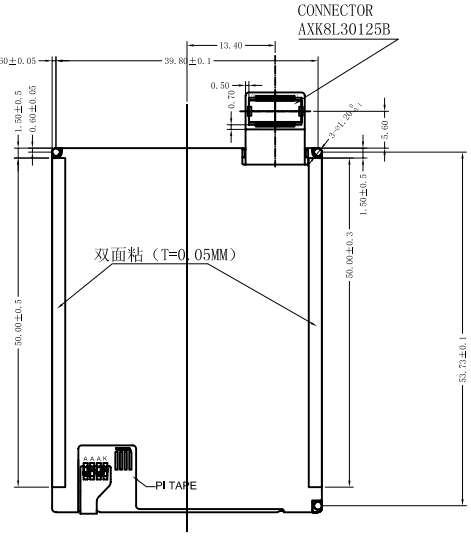

PIN CONNECTION

1	GND
2	RESET
3	LCM-INT
4	Yu(NC)
5	XL(NC)
6	YD(NC)
7	XR(NC)
8	GND
9	VDD
10	CS
11	RS
12	WR
13	RD
14	GND
15	GND
16	DB0
17	DB1
18	DB2
19	DB3
20	DB4
21	DB5
22	DB6
23	DB7
24	DB8
25	LEDA4(NC)
26	LEDA3
27	LEDA2
28	LEDA1
29	LEDK
30	GND



LED CIRCUIT



BOM表：

序号	零件名称		规格	厂家
1	LCD偏光片(两层)		单层厚度:0.22mm	
2	LCD玻璃(两层)		单层厚度:0.3mm	
3	驱动IC		型号:R61516	
4	背光部分	黑白双面胶	厚度:0.06MM	
5		散光片(1张)	单层厚度:0.053MM	
6		增光片(2张)	单层厚度:0.062/0.065	
7		导光板	厚度:0.45MM	
8		粘贴反光片的双面胶	厚度:0.03MM	
9		反光片	厚度:0.065MM	
10		背光支架	材料:BFL2000U	
11	LED灯		0.4高度	
12	铁框		0.15不锈钢	

NOTES:

1. Main LCD: 262K TFT, TRANSMISSIVE/NEGATIVE
2. OPERATING TEMP: -20° C~70° C
3. STORAGE TEMP : -30° C~80° C
4. MAIN LCD DRIVER: COG(ILI9320)
5. BACKLIGHT: 3CHIP-WHITE LED,Parelle connection
6. 未注公差为: ±0.2
7. "*"为重点尺寸，"△"为修改记录
8. 整个产品符合BHS-001标准。

	REVISION RECORD	DATE					
1			TITLE: LCM OUTLINE DIMENSION				D/N : BM8544D
2			FILE NAME : 8544D 模组图		Rev. : 0		P/N :MI0220HT-3
3			FILE NO. :		Ver. : A		SCALE : N.T.S.
4			DRAWN BY		DATE		UNIT : mm
5			CHECKED BY		DATE		PRO.(3):
6			APPROVED BY		DATE		SHEET : 1/1