
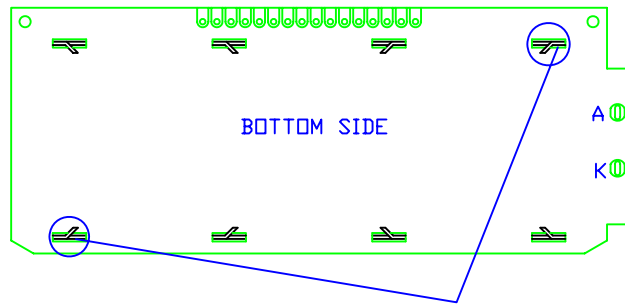
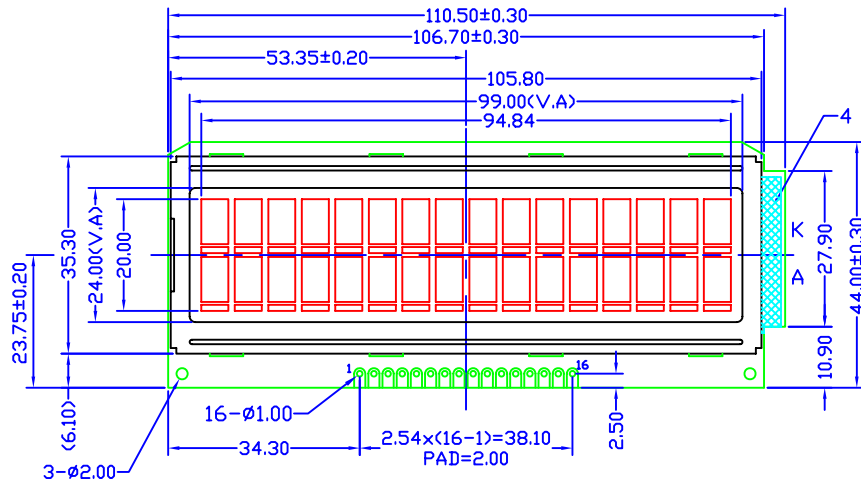
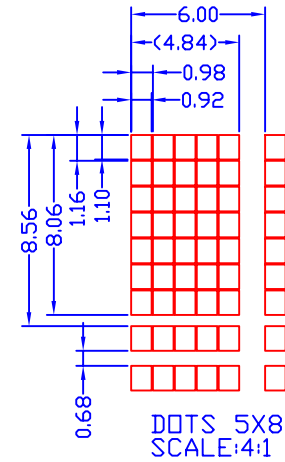
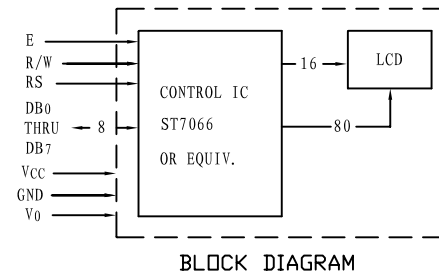


REV.	DESCRIPTION	BY	DATE
-	RELEASED	M.L	07/17/04
A	ECO#040301	P.L	03/02/05
B	ECO#060209	Lina	02/14/06

PIN ASSIGNMENT								
PIN #	1	2	3	4	5	6	7	8
SYMBOL	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0
PIN #	9	10	11	12	13	14	15	16
SYMBOL	E	R/W	RS	Vo	Vcc	Vss	LEDA	LEDK

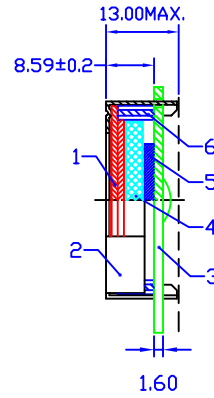

The 2 tabs must be soldered to ground

NOTES:

- ALL DIMENSIONS ARE MILLIMETRE
- EUROPEAN FONT TABLE.
- VIEW DIRECTION: 12:00
- OPERATING TEMPERATURE: -10°C TO +60°C.
- STORAGE TEMPERATURE: -20°C TO +70°C.
- BACKLIGHT: WHITE LED.
- CONNECTOR: ZEBRA.
- LCD TYPE: STN(BLUE)/NEGATIVE
- 如底视图上所示的对角两个铁框扭脚要求接地, 具体的接地焊接要求用焊锡把整个扭脚的侧面都覆盖上。
- 零件及所有包装材料需符合欧盟 RoHS标准.

Item	Drawing No.	Name	Qty.	Spec./Material	Remarks
6	162BZBR-2	Zebra	2		
5	162BDTP	Double side tape	2		
4	162DLED-2	Blacklight	1		WHITE
3	162DPCB	PCB	1	FR4	
2	162BBZL-3	Bezel	1	COLD ROLLED STEEL	
1	162BLCD	LCD display	1	STN (BLUE) /NEGATIVE	TRANSMISSIVE


TOLERANCE		
>0~6	±0.10	>120~300 ±0.50
>6~30	±0.20	>300~500 ±0.80
>30~120	±0.30	>500 ±1.20
// ⊥ ◎ ±0.10; ANGLE: ±3.0°		

REV: B	
SHEET: 1 OF 1	
SCALE: N.T.S.	UNITS: MM
APPROVALS	
DWN	Lina
CHK	
APP	
DATE: Feb-14	



广州市龙宇电子有限公司
Kingtronics Display Technologies Ltd., Co.

DRAWING NO:
162DMOD



MODEL NUMBER :
KM162D
DATE:
14-Feb-2006

DO NOT SCALE THIS DRAWING. PROJECTION