


NOTES:

1. DISPLAY TYPE: STN, YELLOW-GREEN MODE, TRANSFLECTIVE/POSITIVE.
2. DRIVER METHOD: 1/16DUTY, 1/4BIAS, VOP=4.2V VDD=5V.
3. IC DRIVER: KS0066U OR EQUIVALENT.
4. VIEWING DIRECTION: 6 O'CLOCK.
5. OPERATING TEMP: 0 °C ~ 50 °C.
6. STORAGE TEMP: -10 °C ~ 60 °C.
7. LED BACKLIGHT: YELLOW-GREEN EDGE MODE.
8. ALL UNMARKED TOLERANCES: ±0.5.

MULTI-INNO TECHNOLOGY CO.,LTD

MI0802D Y/G LED VERSION

DISPLAY PATTERN

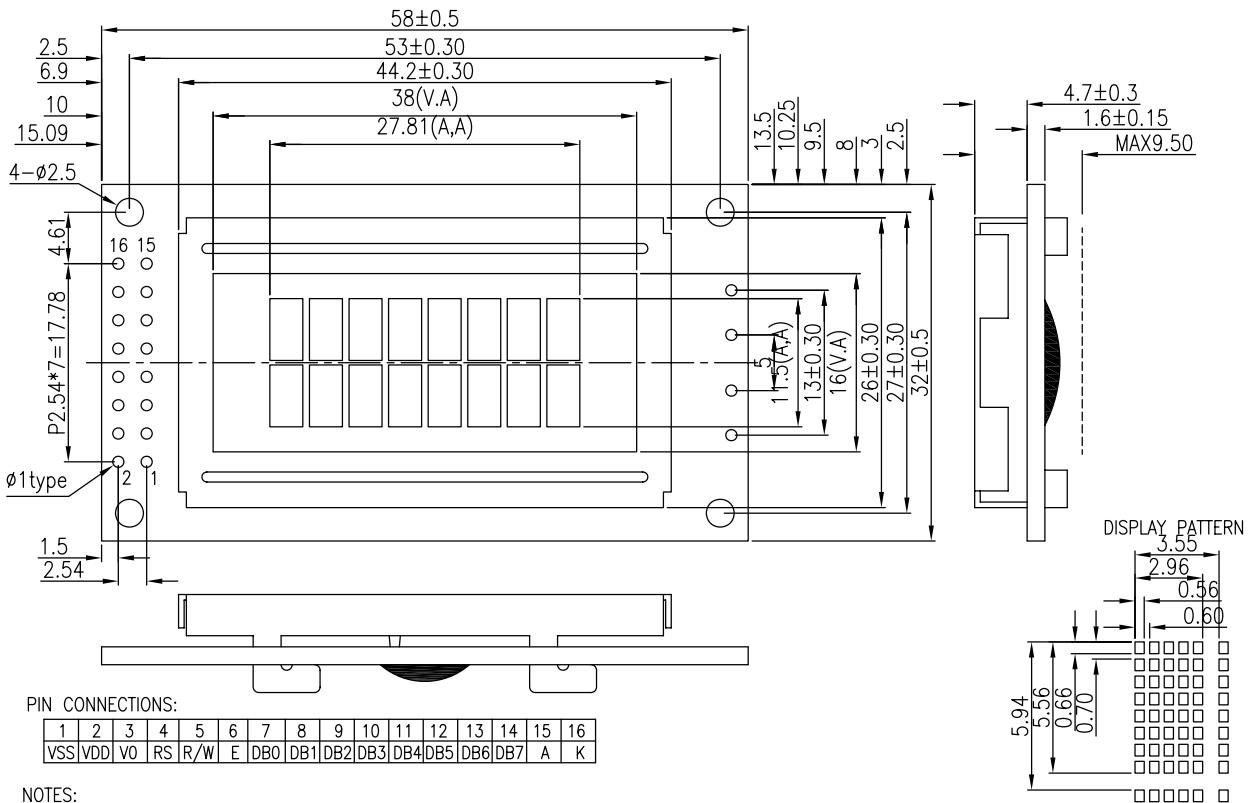

PIN CONNECTIONS:

NOTES:

1. DISPLAY TYPE: STN, YELLOW-GREEN MODE, REFLECTIVE/POSITIVE.
2. DRIVE METHOD: 1/16DUTY, 1/4BIAS, VDD=5.0 V, VOP=4.2 V,
3. VIEWING DIRECTION: 6 O'CLOCK.
4. IC DRIVER: KS0066U OR EQUIVALENT.
5. OPERATING TEMP: 0 °C ~ 50 °C.
6. STORAGE TEMP: -10 °C ~ 60 °C.
7. ALL UNMARKED TOLERANCES: ±0.5.

MULTI-INNO TECHNOLOGY CO.,LTD

MI0802D NO BL VERSION

DISPLAY PATTERN