



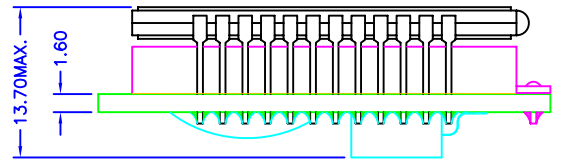
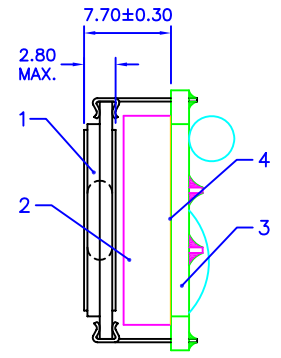


REV.	DESCRIPTION	BY	DATE
-	RELEASED	L.XH	05/25/04

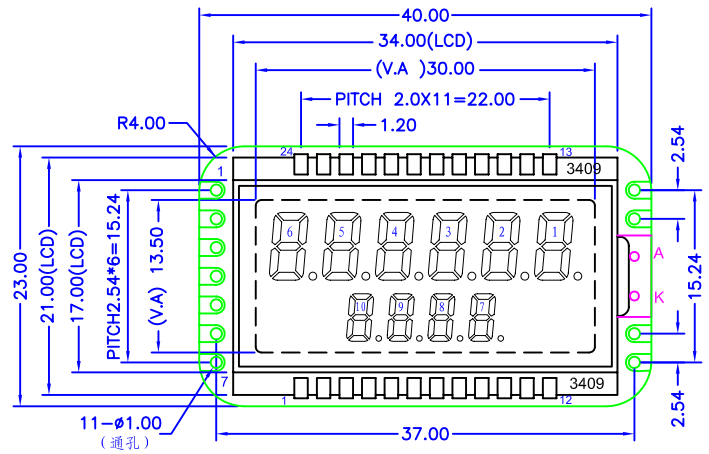

PIN		COM0	COM1	COM2	COM3
1		/	/	/	COM3
2		/	/	COM2	/
3		/	COM1	/	/
4		COM0	/	/	/
5	SEG18	10D	10E	10G	10F
6	SEG19	10H	10C	10B	10A
7	SEG16	9D	9E	9G	9F
8	SEG17	9H	9C	9B	9A
9	SEG14	8D	8E	8G	8F
10	SEG15	8H	8C	8B	8A
11	SEG12	7D	7E	7G	7F
12	SEG13	7H	7C	7B	7A
13	SEG1	1H	1C	1B	1A
14	SEG0	1D	1E	1G	1F
15	SEG3	2H	2C	2B	2A
16	SEG2	2D	2E	2G	2F
17	SEG5	3H	3C	3B	3A
18	SEG4	3D	3E	3G	3F
19	SEG7	4H	4C	4B	4A
20	SEG6	4D	4E	4G	4F
21	SEG9	5H	5C	5B	5A
22	SEG8	5D	5E	5G	5F
23	SEG11	6H	6C	6B	6A
24	SEG10	6D	6E	6G	6F

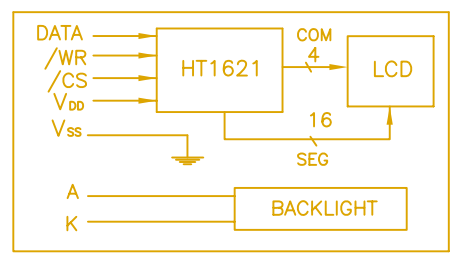

接口说明			
接口	符号	描述	
1	DATA	数据线	
2	/WR	写数据信号	
3	/CS	片选信号	
4	VDD	+5V	电源
5	VSS	0V	
6	A	LED+ (5V)	
7	K	LED-	

序号	图号	名称	数量	规格 / 材料	备注
4	3409DTP	双面胶	1		
3	3409PCB	PCB线路板	1	FR4	
2	3409LED	背光灯	1		电压4.2V; 底部发光
1	3409LCD	液晶显示屏	1	TN / 透反射式	

技术要求

- 所有的尺寸单位为mm;
- 液晶显示屏类型: TN/正性;
- 偏光片模式: 半透式;
- 视角方向: 6:00;
- 驱动电压: 5.0V;
- 驱动模式: 1/4 DUTY; 1/3 BIAS;
- 操作温度: -20° TO +70°;
- 存储温度: -30° TO +80°;
- 连接方式: 金属脚.

TOLERANCE			
>0~6	±0.10	>120~300	±0.50
>6~30	±0.20	>300~500	±0.80
>30~120	±0.30	>500	±1.20
// ⊥ ◎ ±0.10; ANGLE: ±3.0°			

REV: -
SHEET: 1 OF 1
SCALE: N.T.S.
UNITS: MM
APPROVALS
DATE: May-25
DWN L.XH
CHK
APP

**广州市龙宇电子有限公司**  
Kingtronics Display Technologies Ltd., Co.

DRAWING NO: 3409MOD

MODEL NUMBER: KC3409

DATE: 25-May-2004

DO NOT SCALE THIS DRAWING. PROJECTION