


REV.	DESCRIPTION	BY	DATE
-	RELEASED	M.L	08/15/04

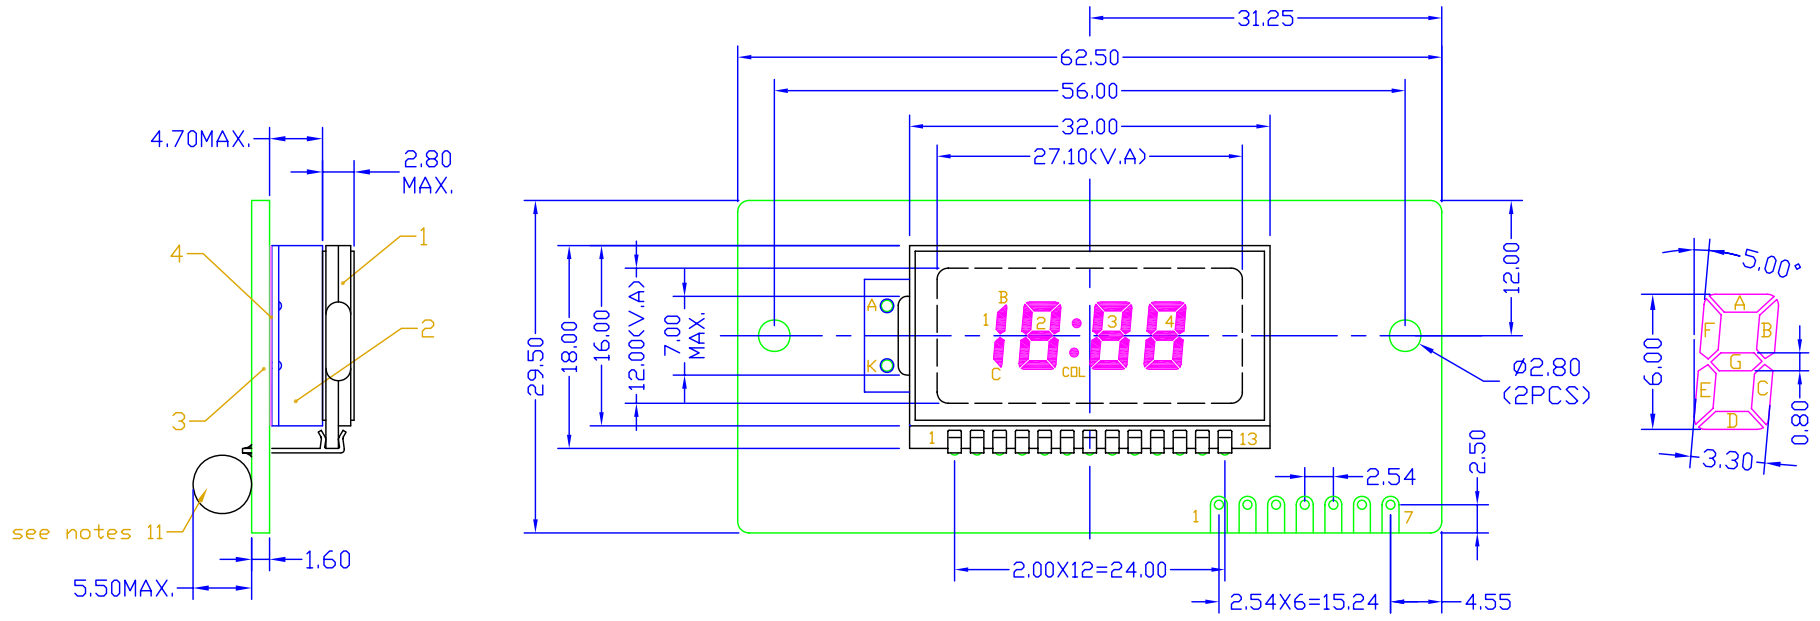

PIN ASSIGNMENT							
PIN#	1	2	3	4	5	6	7
FUNCTIONS	LED+	BATTERY POWER	+5V	GND	S	COM	D

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13
COM2	1BC	2B	2A	2F	3F	3AD	3B	COL	4B	4A	4F	/	COM2
COM1	2D	2C	2G	2E	3E	3G	3C	4D	4C	4G	4E	COM1	/

- NOTES:
1. DISPLAY TYPE: HTN/POSITIVE
 2. VIEWING ANGLE: 12:00
 3. DRIVING VOLTAGE: 3.0V
 4. DRIVE METHOD: 1/2DUTY 1/2BIAS.
 5. POLARIZER MODEL: TRANSFLECTIVE.
 6. OPERATING TEMP: -30°C~+85°C.
 7. STORAGE TEMP:-40°C~+85°C.
 8. CONNECTORS: 13PIN.

4	3804DTP	DOUBLE SIDES TAPE	1		
3	3804PCB	PCB	1	FR4	
2	3203LED	LED BACKLIGHT	1	YELLOW-GREEN	
1	3203LCD	LCD DISPLAY	1	HTN/REFLECTIVE	
Item	Drawing NO.	Name	QTY.	Spec/Material	Notes

TOLERANCE		
>0~6	±0.10	>120~300 ±0.50
>6~30	±0.20	>300~500 ±0.80
>30~120	±0.30	>500 ±1.20
// ⊥ ◎ ±0.10; ANGLE: ±3.0°		

REV: -

SHEET: 1 OF 1

SCALE: N.T.S. UNITS: MM

APPROVALS: DWN M.L. DATE: Aug-15

CHK: APP: DO NOT SCALE THIS DRAWING.

PROJECTION:

广州市龙宇电子有限公司
Kingtronics Display Technologies Ltd., Co.

DRAWING NO: 3804MOD

MODEL NUMBER: KC3804

DATE: 15-Aug-2004