



REV.	DESCRIPTION	DATE
------	-------------	------

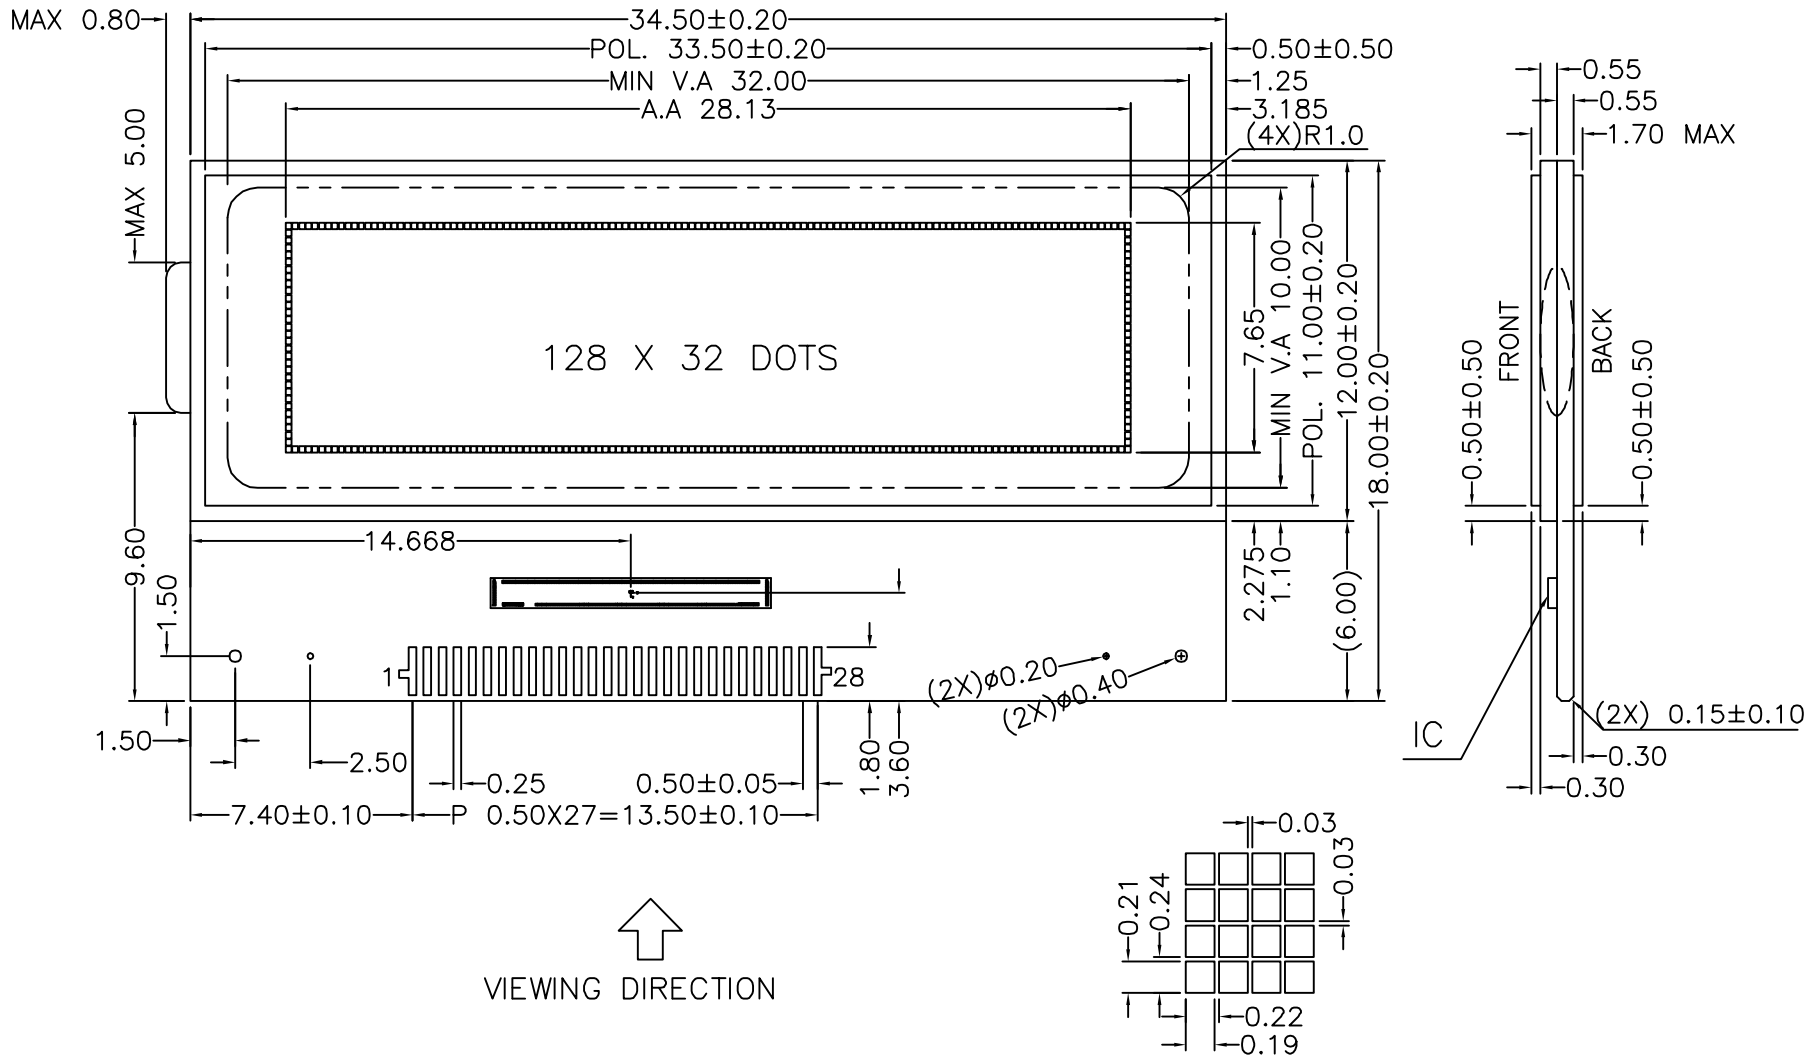

### SPECIFICATIONS

BACK POLARIZER : TRANSFLECTIVE,ADHESIVE  
 OPERATING TEMP : -10°C TO +60°C  
 STORAGE TEMP : -20°C TO +70°C  
 VIEWING DIRECTION : 6 O'CLOCK  
 DRIVE CONDITION : 1/33 DUTY, 1/6 BIAS, 5.0 V  
 DISPLAY MODE : FSTN, POSITIVE MODE  
 CUSTOMER P/N :  
 CONNECTION: FPC  
 USE IC: ST7565S

SCALE: N.T.S.		 <b>广州市龙宇电子有限公司</b> <b>Kingtronics Display Technologies Ltd., Co.</b>
SHEET: 1 OF 4		
GENERAL TOL. 0.20 MM	UNITS MM	
APPROVALS		DATE
DWN	Alfred	JAN-29
MODEL NUMBER :		DRAWING NO:
F128325H00		
DO NOT SCALE THIS DRAWING.		PROJECTION
DATE:		2004-01-29

