




REV.	DESCRIPTION	DATE
A	REV. IC	2005-1-10

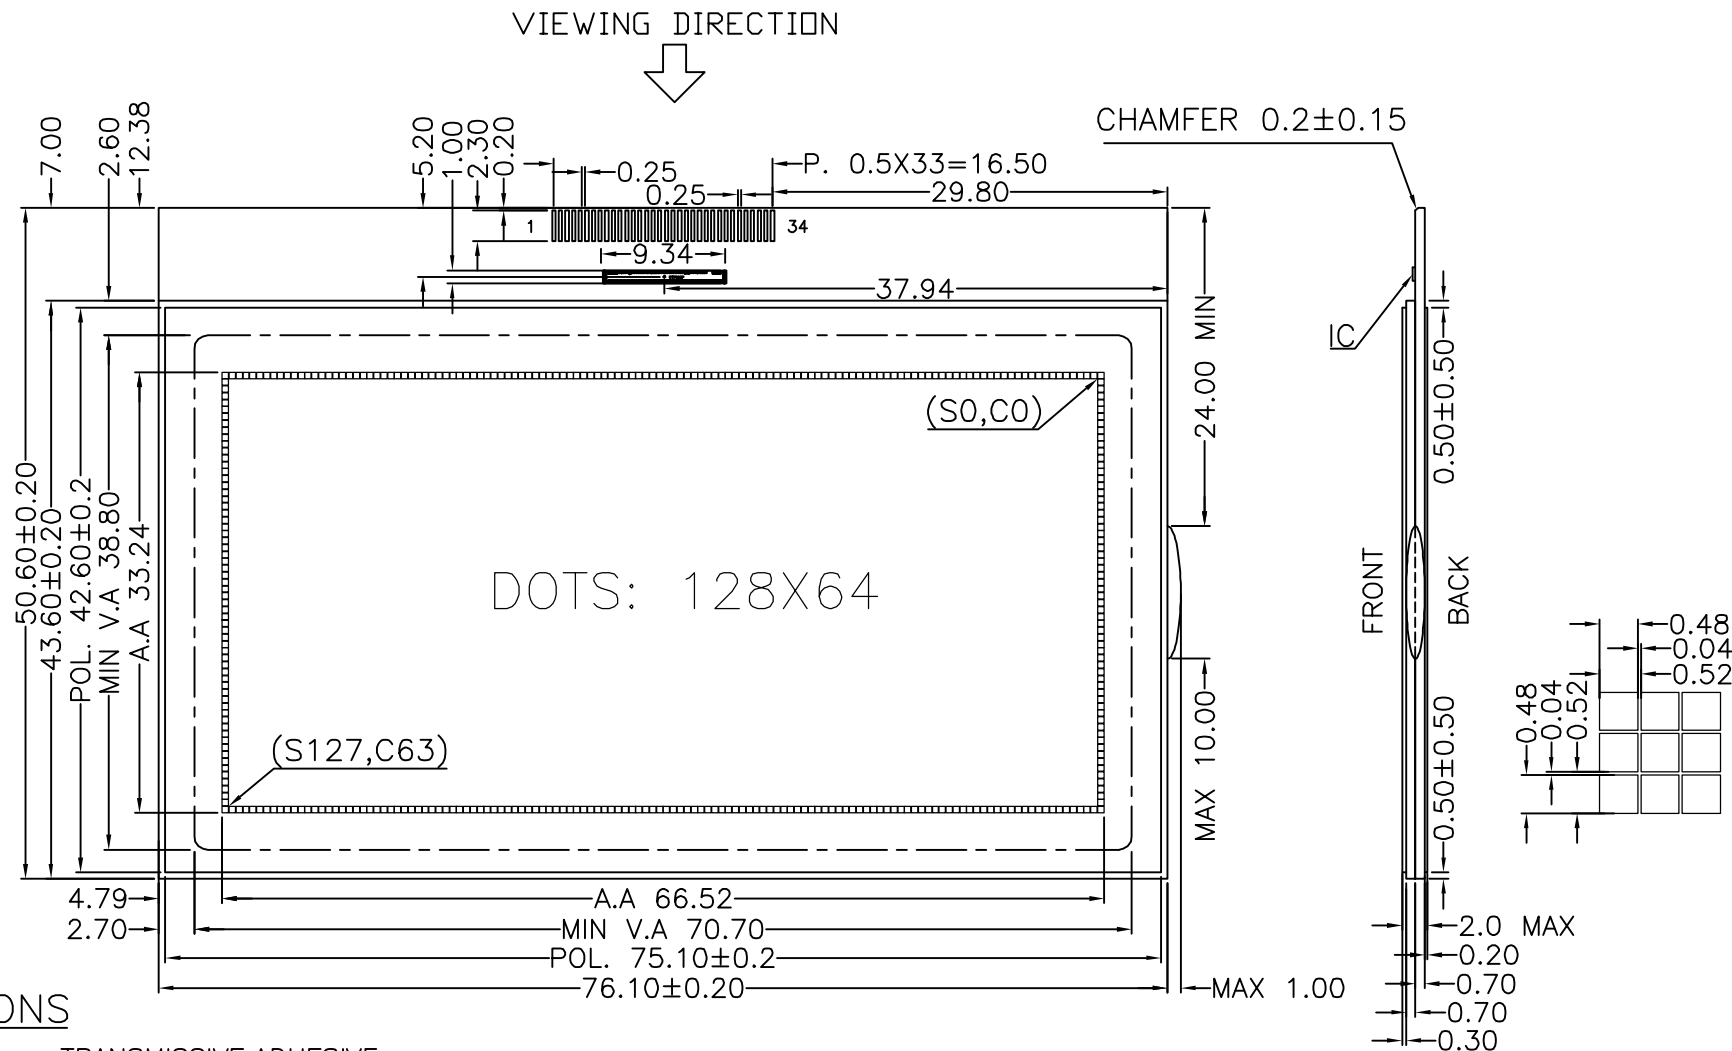


SPECIFICATIONS

BACK POLARIZER : TRANSMISSIVE,ADHESIVE
 OPERATING TEMP : -20°C TO +70°C
 STORAGE TEMP : -30°C TO +80°C
 VIEWING DIRECTION : 12 O'CLOCK
 DRIVE CONDITION : 1/65 DUTY, 1/9 BIAS, 10 V
 DISPLAY MODE : FSTN, NEGATIVE MODE
 CUSTOMER P/N :
 CONNECTION: FPC
 DRIVE IC : ST7565P

面偏光片要求防眩光
 底偏光片上保护膜不应有划伤或脱落。
 请不要在产品上加任何商标及型号


SCALE: N.T.S.		 广州市龙宇电子有限公司 Kingtronics Display Technologies Ltd., Co.	
SHEET: 1 OF 4			
GENERAL TOL. 0.20 MM	UNITS MM	MODEL NUMBER : F1286425H00	
APPROVALS	DATE		
DWN	Yucca Oct-10	 DRAWING NO: DATE: 2005-09-09	
CHK			
APP		DO NOT SCALE THIS DRAWING.	

REV.	DESCRIPTION	DATE
A	REV. IC	2005-1-10

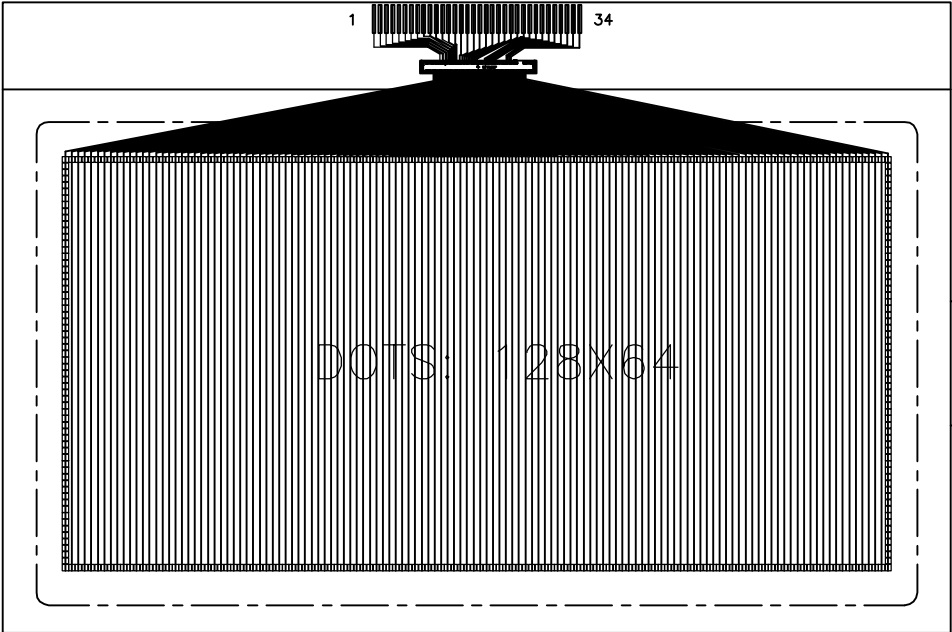



SEG

PIN	SYMBOL	PIN	SYMBOL
1	/CS1	18	CAP1N
2	/RES	19	CAP3P
3	A0	20	CAP1N
4	/WR(R/W)	21	CAP1P
5	/RD(E)	22	CAP2P
6	D0	23	CAP2N
7	D1	24	CAP4P
8	D2	25	V4
9	D3	26	V3
10	D4	27	V2
11	D5	28	V1
12	D6	29	V0
13	D7	30	VR
14	VDD(3.3V)	31	C86
15	VSS	32	P/S
16	Vout	33	/HPM
17	CAP5P	34	IRS

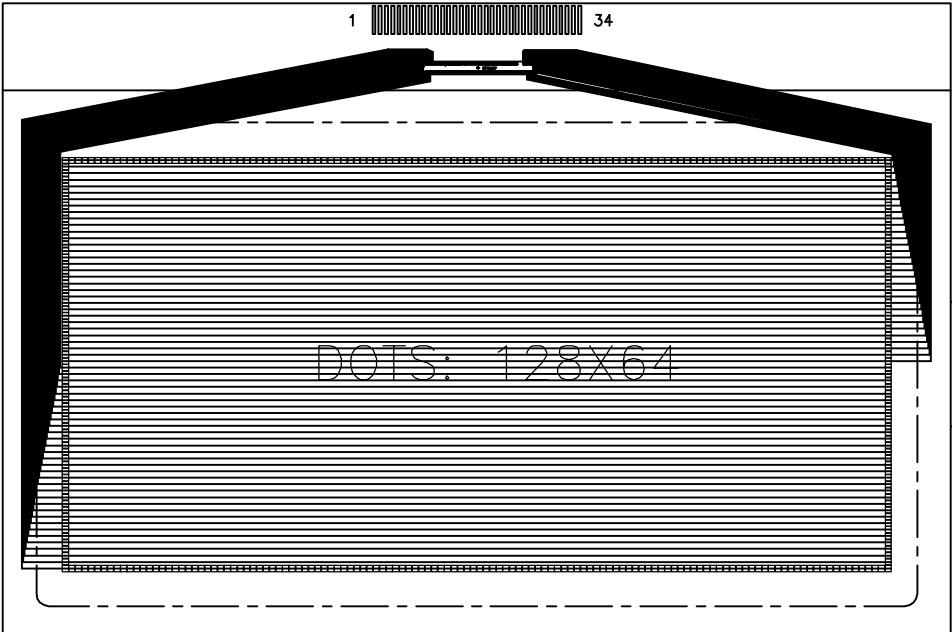

COM

IC	LCD
S0~S127	S0~S127
C0~C31	C0~C31
C32~C63	C32~C63

SCALE: N.T.S.		 广州市龙宇电子有限公司 Kingtronics Display Technologies Ltd., Co.				
SHEET: 3 OF 4						
GENERAL TOL. 0.20 MM	UNITS MM	APPROVALS DWN Yucca CHK APP	DATE Oct-10	MODEL NUMBER :		DRAWING NO:
				F1286425H00		DATE: 2005-09-09
				DO NOT SCALE THIS DRAWING.	PROJECTION	