


MAX 0.80

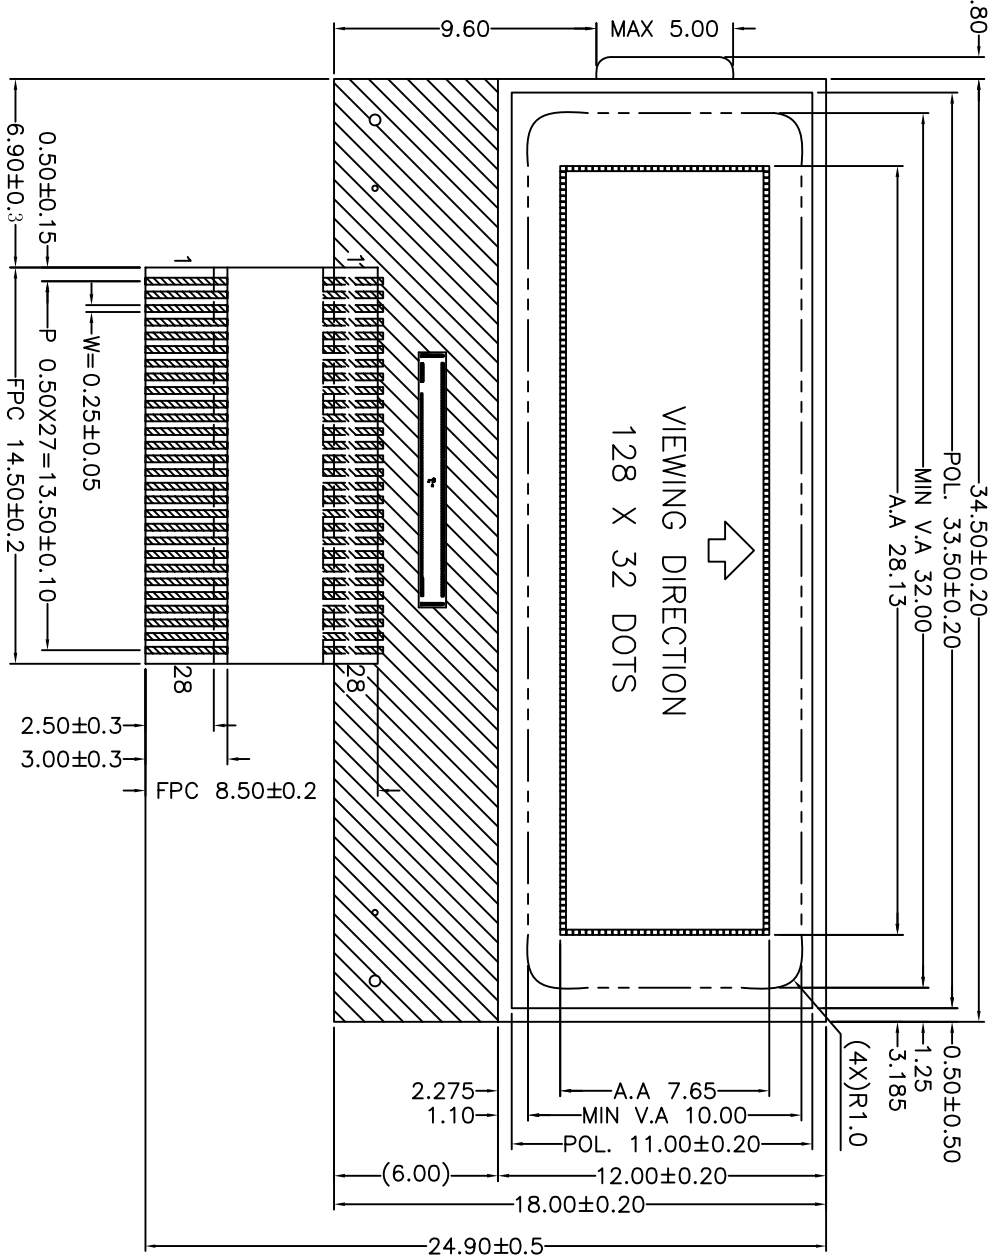


SPECIFICATIONS

BACK POLARIZER : TRANSPARENT,ADHESIVE  
 OPERATING TEMP : -10°C TO +60°C  
 STORAGE TEMP : -20°C TO +70°C  
 VIEWING DIRECTION : 6 O'CLOCK  
 DRIVE CONDITION : 1/33 DUTY, 1/6 BIAS, 3.0 V  
 DISPLAY MODE : FSTN, POSITIVE MODE  
 CUSTOMER P/N :  
 CONNECTION: FPC

REV.	DESCRIPTION	DATE
A	RELEASED	04/06

PIN	DESC	PIN	DESC
1	VDD	15	VSS
2	C86	16	D7
3	VSS	17	D6
4	V5	18	D5
5	V4	19	D4
6	V3	20	D3
7	V2	21	D2
8	V1	22	D1
9	CAP2+	23	D0
10	CAP2-	24	RD(E)
11	CAP1-	25	WR(R/W)
12	CAP1+	26	A0
13	CAP3-	27	/RES
14	VOUT	28	/CS1



DOT SIZE

SCALE: N.T.S.		MODEL NUMBER : 128325MOD-2		DRAWING NO: 2005-04-06	
SHEET: 1 OF 1		DATE: APR-06		DATE: 2005-04-06	
GENERAL TOL. 0.20 MM		UNITS MM		DRAWING NO: 2005-04-06	
APPROVALS		DATE		DRAWING NO: 2005-04-06	
DWN XLN		APR-06		DRAWING NO: 2005-04-06	
CHK				DRAWING NO: 2005-04-06	
APP				DRAWING NO: 2005-04-06	



Kingtronics Display Technologies Ltd., Co.

DO NOT SCALE THIS DRAWING. PROJECTION