

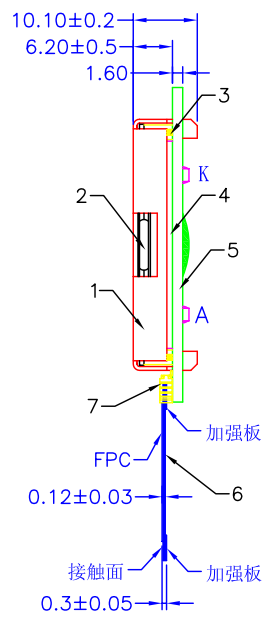


REV.	DESCRIPTION	BY	DATE
A	RELEASED	XLN	12/29/05
B	ECO#060213	XLN	02/17/06

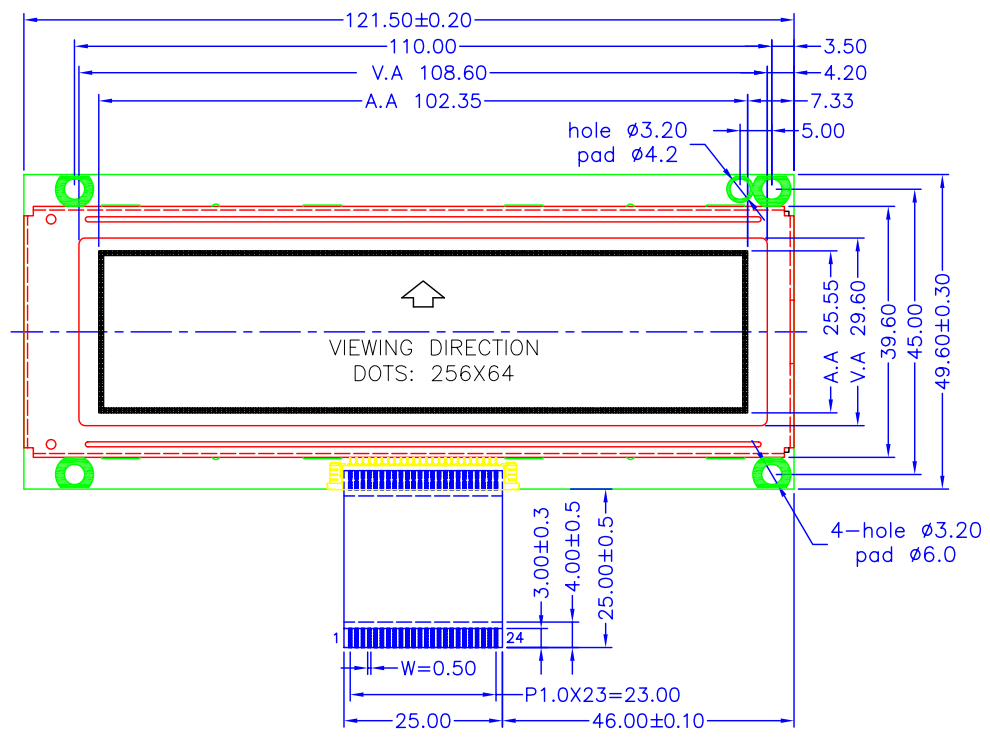

CONNECTOR PINOUT

Pin NO.	Name
1	VSS
2	VSS
3	VDD(+5V)
4	V0
5	VOU(-10V)
6	RS
7	R/W
8	E
9	DB0
10	DB1
11	DB2
12	DB3
13	DB4
14	DB5
15	DB6
16	DB7
17	CSA
18	CSB
19	CSC
20	REST
21	LED+(3.2V)
22	LED+
23	LED-
24	LED-

SPECIFICATIONS

BACK POLARIZER : TRANSFLECTIVE,ADHESIVE
 OPERATING TEMP : -30°C TO +80°C
 STORAGE TEMP : -40°C TO +85°C
 VIEWING DIRECTION : 6 O'CLOCK
 DRIVE CONDITION : 1/64 DUTY, 1/9 BIAS, Vop=13.0V
 DISPLAY MODE : FSTN,POSITIVE MODE
 BACKLIGHT: WHITE EDGE LED
 CONNECTION: ZEBRA

7	FPC100-24-S-U-Z-2	FPC CONNECTOR	1	1.0MM ZIF RIGHT ANGLE SMT UPPER CONTACT TYPE	
6	25664AFPC	FPC	1		
5	25664APCB	PCB ASSEMBLY	1	FR4	
4	25664ALED	BACKLIGHT LED	1		
3	25664AZBR-1	ZEBRA	2		
2	25664ALCD	LCD DISPLAY	1		
1	25664ABZL-1	METAL FRAME	1	STAINLESS STEEL	
Item	Drawing NO.	Name	QTY.	Spec/Material	Notes

TOLERANCE		
>0~6	±0.10	>120~300 ±0.50
>6~30	±0.20	>300~500 ±0.80
>30~120	±0.30	>500 ±1.20
// ⊥ ◎ ±0.10; ANGLE: ±3.0°		

REV: B
 SHEET: 1 OF 1
 SCALE: N.T.S.
 APPROVALS
 DWN Lina Feb-17
 CHK
 APP

广州市龙宇电子有限公司
 Kingtronics Display Technologies Ltd., Co.

DRAWING NO:
 25664AMOD
 DO NOT SCALE THIS DRAWING.
 PROJECTION
 MODEL NUMBER :
 KG25664A
 DATE:
 17-Feb-2005