

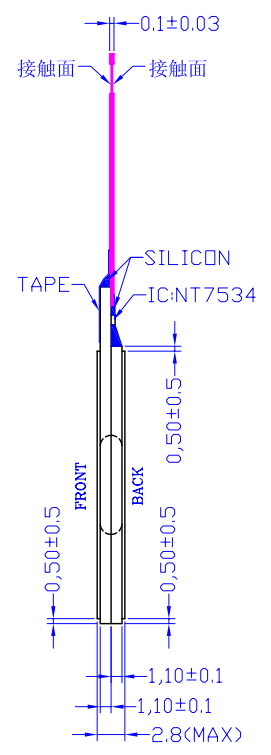


REV.	BY.	DESCRIPTION	DATE
A	LINA	RELEASED	07/16/05

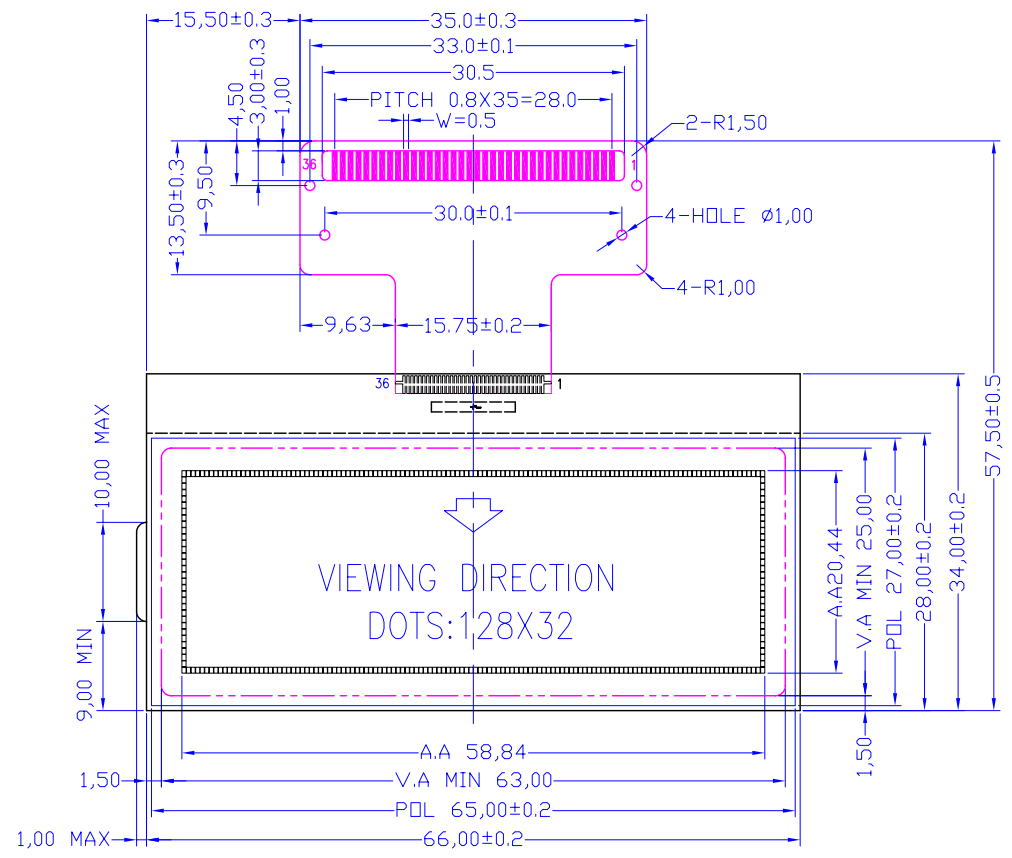

1	NC	19	C3+
2	NC	20	C1-
3	CS1	21	C1+
4	RES	22	C2+
5	A0	23	C2-
6	R/W	24	NC
7	E/RD	25	V1
8	D0	26	V2
9	D1	27	V3
10	D2	28	V4
11	D3	29	V0
12	D4	30	VR
13	D5	31	NC
14	D6	32	C86
15	D7	33	P/S
16	VDD	34	NC
17	VSS	35	IRS
18	VOUT	36	NC



SPECIFICATIONS

BACK POLARIZER : TRANSMISSIVE,ADHESIVE
 OPERATING TEMP : 0°C TO +50°C
 STORAGE TEMP : -10°C TO +60°C
 VIEWING DIRECTION : 12 O'CLOCK
 DRIVE CONDITION : 1/32 DUTY, 1/6 BIAS, VOP 6.0 V
 DISPLAY MODE : STN(Y-G), POSITIVE MODE
 CUSTOMER P/N :
 CONNECTION: FPC
 DRIVER IC: NT7534


TOLERANCE	
>0~6 ±0.10	>120~300 ±0.50
>6~30 ±0.20	>300~500 ±0.80
>30~120 ±0.30	>500 ±1.20
// ⊥ ◎ ±0.10; ANGLE: ±3.0°	

REV: A	
SHEET: 1 OF 1	
SCALE: N.T.S.	UNITS MM
APPROVALS	DATE
DWN Lina	JUL-16
CHK	
APP	



广州市龙宇电子有限公司
 Kingtronics Display Technologies Ltd., Co.

DRAWING NO:
 1283210MOD



MODEL NUMBER :
 KGC1283210
 DATE:
 16-JUL-2005

DO NOT SCALE THIS DRAWING. PROJECTION