

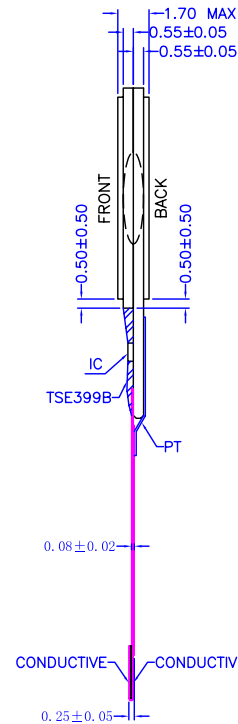


8 7 6 5 4 3 2 1

REV.	BY.	DESCRIPTION	DATE
A	LINA	RELEASED	04/06/05

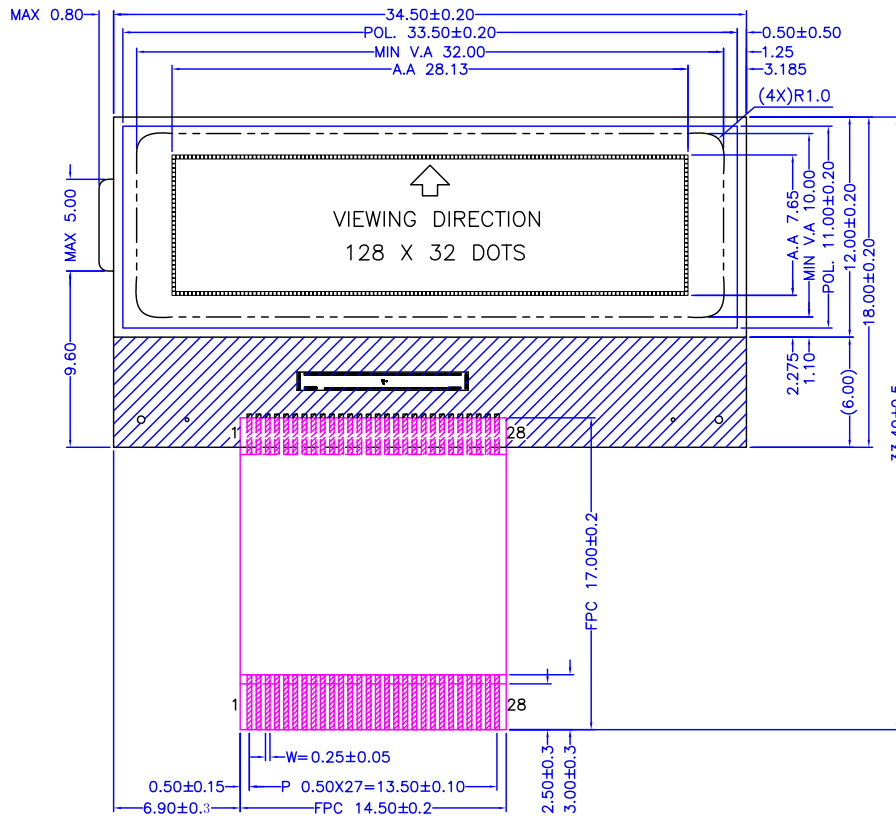

PIN	DESC	PIN	DESC
1	VDD	15	VSS
2	C86	16	D7
3	VSS	17	D6
4	V5	18	D5
5	V4	19	D4
6	V3	20	D3
7	V2	21	D2
8	V1	22	D1
9	CAP2+	23	D0
10	CAP2-	24	RD(E)
11	CAP1-	25	WR(R/W)
12	CAP1+	26	A0
13	CAP3-	27	/RES
14	VOUT	28	/CS1



SPECIFICATIONS

BACK POLARIZER : TRANSFLECTIVE,ADHESIVE
 OPERATING TEMP : -10°C TO +60°C
 STORAGE TEMP : -20°C TO +70°C
 VIEWING DIRECTION : 6 O'CLOCK
 DRIVE CONDITION : 1/33 DUTY, 1/6 BIAS, 5.0 V
 DISPLAY MODE : FSTN, POSITIVE MODE
 CUSTOMER P/N :
 CONNECTION: FPC

TOLERANCE	
>0~6 ±0.10	>120~300 ±0.50
>6~30 ±0.20	>300~500 ±0.80
>30~120 ±0.30	>500 ±1.20
// ⊥ ◎ ±0.10; ANGLE: ±3.0°	

REV: A	
SHEET: 1 OF 1	
SCALE: N.T.S.	UNITS MM
APPROVALS	DATE
DWN Lina	APR-06
CHK	
APP	

广州市龙宇电子有限公司
Kingtronics Display Technologies Ltd., Co.

DRAWING NO: 128325MOD-1	 MODEL NUMBER : KGC128325 DATE: 16-APR-2005
DO NOT SCALE THIS DRAWING.	

8 7 6 5 4 3 2 1