

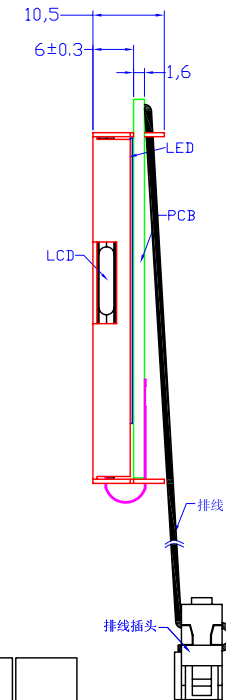


REV.	BY.	DESCRIPTION	DATE
B	LINA	ECO#0036	06/27/05

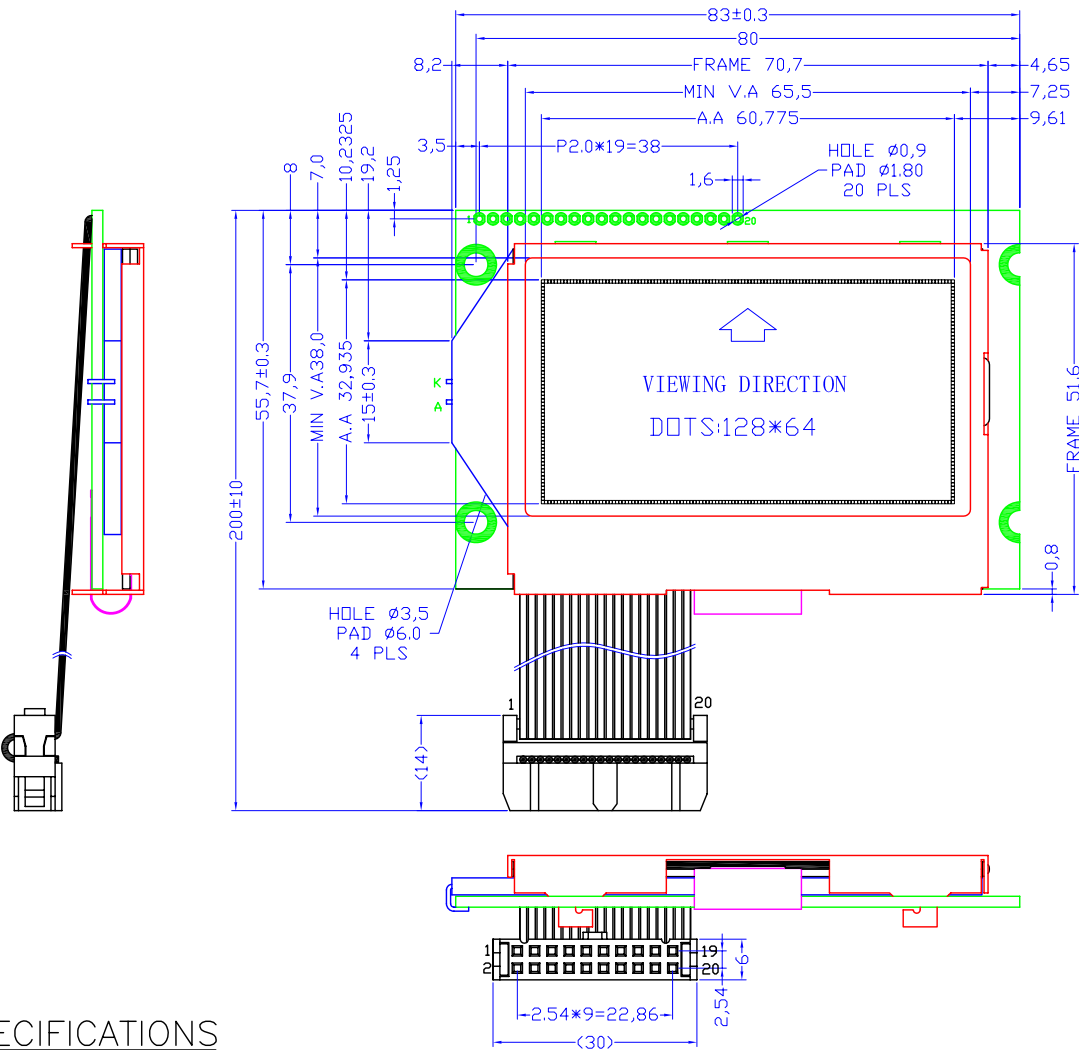

1	LED-
2	LED+
3	GND
4	GND
5	PS
6	GND
7	VCC (3.0V)
8	D7
9	D6
10	D5
11	D4
12	D3
13	D2
14	D1
15	D0
16	E/RD
17	R/W
18	D/C
19	RESB
20	CSB

**SPECIFICATIONS**

BACK POLARIZER : TRANSMISSIVE,ADHESIVE  
 OPERATING TEMP : -10°C TO +60°C  
 STORAGE TEMP : -20°C TO +70°C  
 VIEWING DIRECTION : 6 O'CLOCK  
 DRIVE CONDITION : 1/64 DUTY, 1/9 BIAS, 9.0 V  
 DISPLAY MODE : STN(Y-G), POSITIVE MODE  
 BACK LIGHT : LED EDGE GREEN  
 CONNECTION: FPC  
 DRIVER IC: NT7532


TOLERANCE	
>0~6 ±0.10	>120~300 ±0.50
>6~30 ±0.20	>300~500 ±0.80
>30~120 ±0.30	>500 ±1.20
// ⊥ ◎ ±0.10; ANGLE: ±3.0°	

REV: B	
SHEET: 1 OF 1	
SCALE: N.T.S.	UNITS: MM
APPROVALS	DATE
DWN Lina	JUN-27
CHK	
APP	



**广州市龙宇电子有限公司**  
 Kingtronics Display Technologies Ltd., Co.

DRAWING NO:  
 1286420MOD



MODEL NUMBER :  
 KGC1286420  
 DATE:  
 27-JUN-2005

DO NOT SCALE THIS DRAWING.