

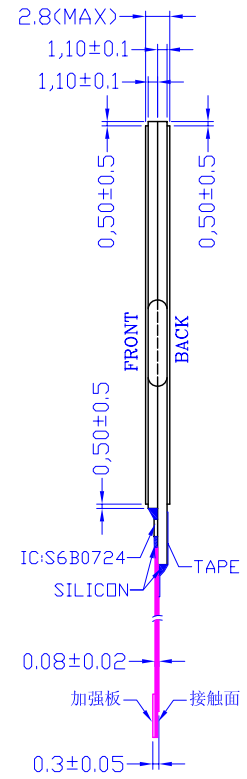


REV.	DESCRIPTION	BY.	DATE
A	RELEASED	LINA	07/14/05

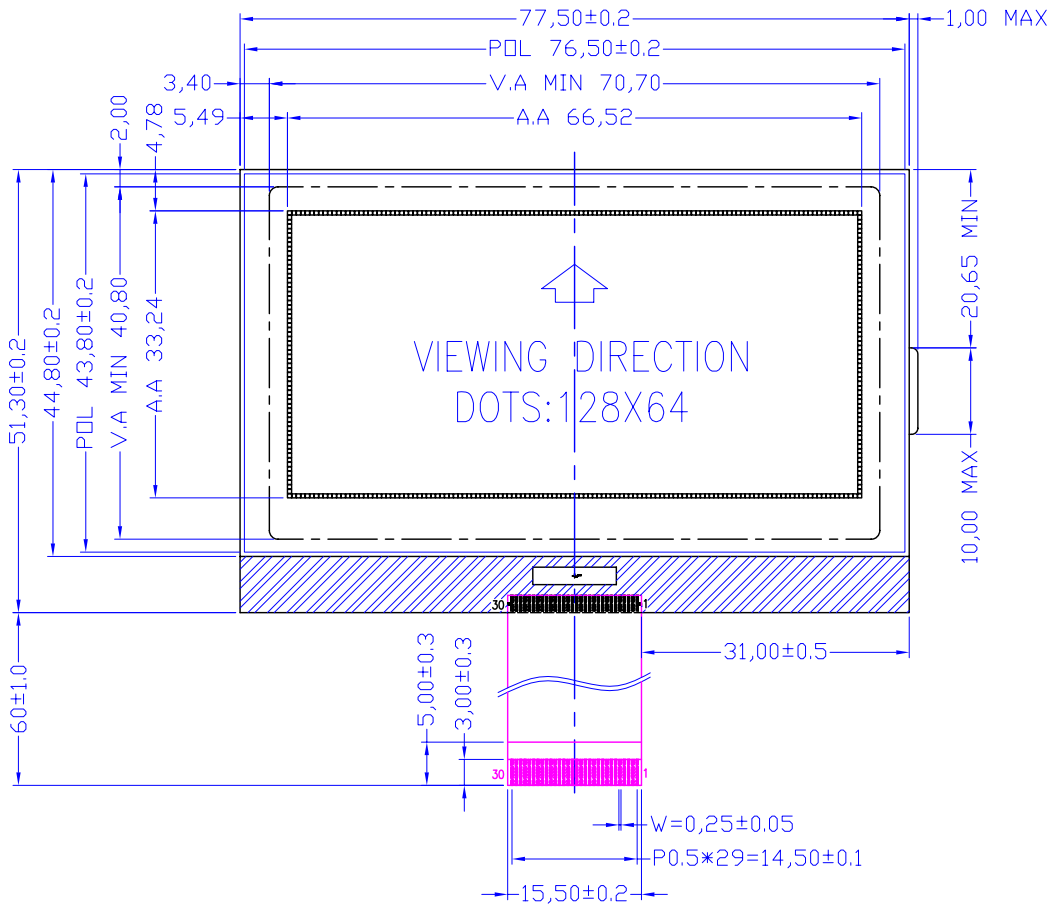

PIN	SYMBOL	PIN	SYMBOL
1	NC	16	VSS
2	CS1B	17	VOUT
3	RESETB	18	CAP3+
4	RS	19	CAP1-
5	WRB	20	CAP1+
6	RDB	21	CAP2+
7	DB0	22	CAP2-
8	DB1	23	V1
9	DB2	24	V2
10	DB3	25	V3
11	DB4	26	V4
12	DB5	27	V0
13	DB6	28	VR
14	DB7	29	INTRS
15	VDD	30	NC



DETAIL DOTS

SPECIFICATIONS


BACK POLARIZER : REFLECTIVE,ADHESIVE
 OPERATING TEMP : 0°C TO +50°C
 STORAGE TEMP : -10°C TO +60°C
 VIEWING DIRECTION : 6 O'CLOCK
 DRIVE CONDITION : 1/65 DUTY, 1/9 BIAS, VOP 9.0 V, VDD 3.0 V
 DISPLAY MODE : STN(Y-G), POSITIVE MODE
 CUSTOMER P/N :
 CONNECTION: FPC
 DRIVER IC: S6B0724A01-BDCY

TOLERANCE	
>0~6 ±0.10	>120~300 ±0.50
>6~30 ±0.20	>300~500 ±0.80
>30~120 ±0.30	>500 ±1.20
// ⊥ ◎ ±0.10; ANGLE: ±3.0°	

REV: A	
SHEET: 1 OF 1	
SCALE: N.T.S.	UNITS MM
APPROVALS	DATE
DWN Lina	JUL-14
CHK	
APP	

广州市龙宇电子有限公司
Kingtronics Display Technologies Ltd., Co.

DRAWING NO:
1286421MOD



MODEL NUMBER :
KGC1286421
DATE:
14-JUL-2005

DO NOT SCALE THIS DRAWING. PROJECTION