
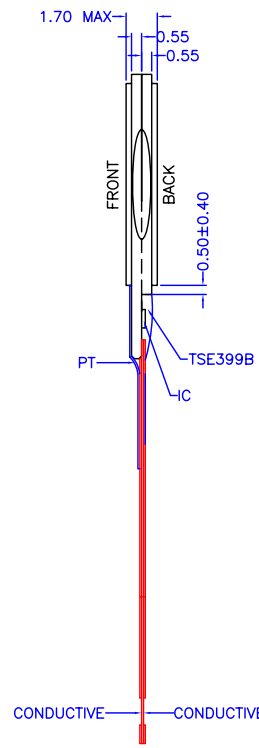



REV.	BY.	DESCRIPTION	DATE
A	LINA	RELEASED	03/30/05

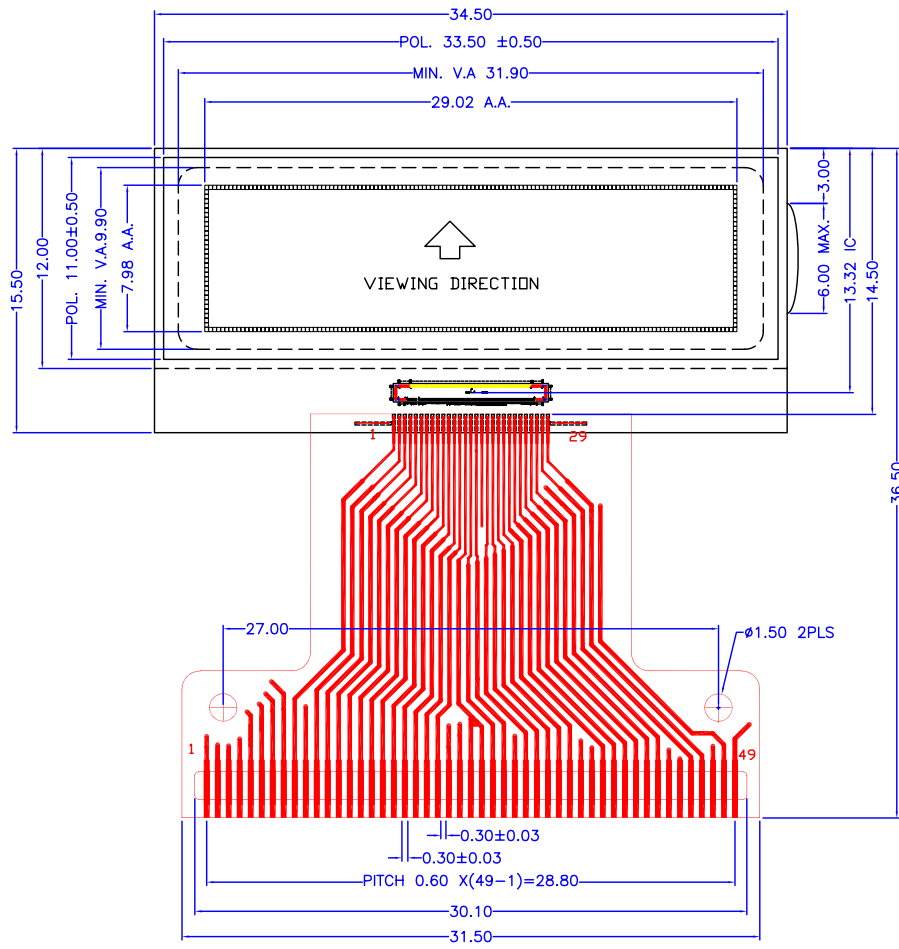

PIN	DESC	PIN	DESC	PIN	DESC
1	NC	19	D4	37	V1
2	NC	20	D5	38	V2
3	NC	21	D6	39	V3
4	NC	22	D7	40	V4
5	NC	23	NC	41	V0
6	NC	24	NC	42	NC
7	NC	25	VDD	43	NC
8	NC	26	VDD	44	NC
9	/CS1	27	VSS	45	C86
10	NC	28	VOUT	46	P/S
11	/RES	29	NC	47	NC
12	A0	30	C3+	48	NC
13	/WR	31	C1-	49	NC
14	/RD	32	C1+		
15	D0	33	C2+		
16	D1	34	C2-		
17	D2	35	NC		
18	D3	36	NC		

SPECIFICATIONS

BACK POLARIZER : TRANSFLECTIVE,ADHESIVE
 OPERATING TEMP : -10°C TO +60°C
 STORAGE TEMP : -20°C TO +70°C
 VIEWING DIRECTION : 6 O'CLOCK
 DRIVE CONDITION : 1/32 DUTY, 1/6 BIAS, 8.8 V
 DISPLAY MODE : FSTN, POSITIVE MODE
 CUSTOMER P/N :
 CONNECTION: FPC
 USE IC: CDG/NT7534



DOTS SIZE


TOLERANCE	
>0~6 ±0.10	>120~300 ±0.50
>6~30 ±0.20	>300~500 ±0.80
>30~120 ±0.30	>500 ±1.20
// ⊥ ◎ ±0.10; ANGLE: ±3.0°	

REV: A	
SHEET: 1 OF 1	
SCALE: N.T.S.	UNITS MM
APPROVALS	DATE
DWN Lina	Mar-30
CHK	
APP	



广州市龙宇电子有限公司
 Kingtronics Display Technologies Ltd., Co.

DRAWING NO:
132322MOD



MODEL NUMBER :
KGC132322
DATE:
30-Mar-2005

DO NOT SCALE THIS DRAWING.

PROJECTION