



8 7 6 5 4 3 2 1

| REV. | BY.  | DESCRIPTION | DATE     |
|------|------|-------------|----------|
| A    | LINA | RELEASED    | 02/16/05 |

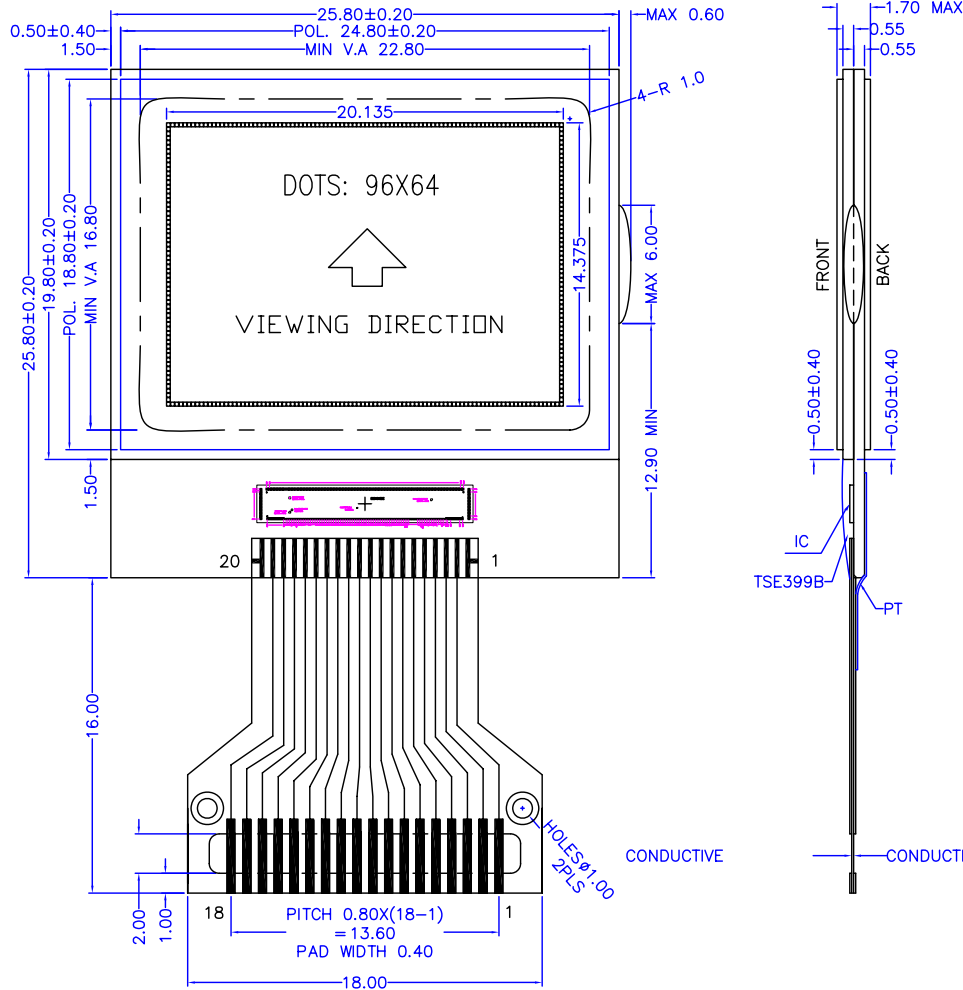



| PIN | DESC    |
|-----|---------|
| 1   | /CS1    |
| 2   | /RES    |
| 3   | D/C     |
| 4   | D6(SCK) |
| 5   | D7(SDA) |
| 6   | VDD     |
| 7   | VSS     |
| 8   | VEE     |
| 9   | C3N     |
| 10  | C1P     |
| 11  | C1N     |
| 12  | C2N     |
| 13  | C2P     |
| 14  | VL2     |
| 15  | VL3     |
| 16  | VL4     |
| 17  | VL5     |
| 18  | VL6     |

**SPECIFICATIONS**

BACK POLARIZER : TRANSMISSIVE,ADHESIVE  
 OPERATING TEMP : 0°C TO +55°C  
 STORAGE TEMP : -20°C TO +65°C  
 VIEWING DIRECTION : 6 O'CLOCK  
 DRIVE CONDITION : 1/64 DUTY, 1/9 BIAS, 9.8 V  
 DISPLAY MODE : FSTN, POSITIVE MODE  
 CUSTOMER P/N :  
 CONNECTION:  
 USE IC: SSD1815BZ

| TOLERANCE                  |       | REV: A        |       |
|----------------------------|-------|---------------|-------|
| >0~6                       | ±0.10 | >120~300      | ±0.50 |
| >6~30                      | ±0.20 | >300~500      | ±0.80 |
| >30~120                    | ±0.30 | >500          | ±1.20 |
| // ⊥ ◎ ±0.10; ANGLE: ±3.0° |       | SHEET: 1 OF 1 |       |
|                            |       | SCALE:        | UNITS |
|                            |       | N.T.S.        | MM    |
|                            |       | APPROVALS     | DATE  |
| DWN                        | Lina  | Feb-16        |       |
| CHK                        |       |               |       |
| APP                        |       |               |       |

 **广州市龙宇电子有限公司**  
 Kingtronics Display Technologies Ltd., Co.

|                            |   |                            |
|----------------------------|---|----------------------------|
| DRAWING NO:<br>96641MOD    |  | MODEL NUMBER :<br>KGC96641 |
| DO NOT SCALE THIS DRAWING. |   | DATE:<br>16-Feb-2005       |

8 7 6 5 4 3 2 1