

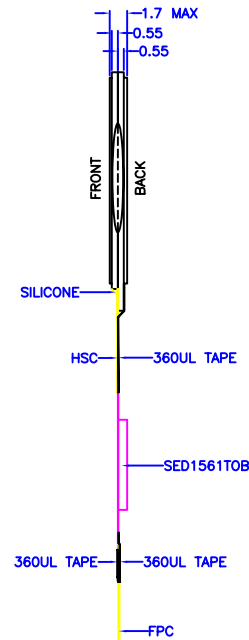


REV.	DESCRIPTION	BY	DATE
A	RELEASED	LGJ	03/11/05
B	MODIFY HSC	LGJ	04/11/05

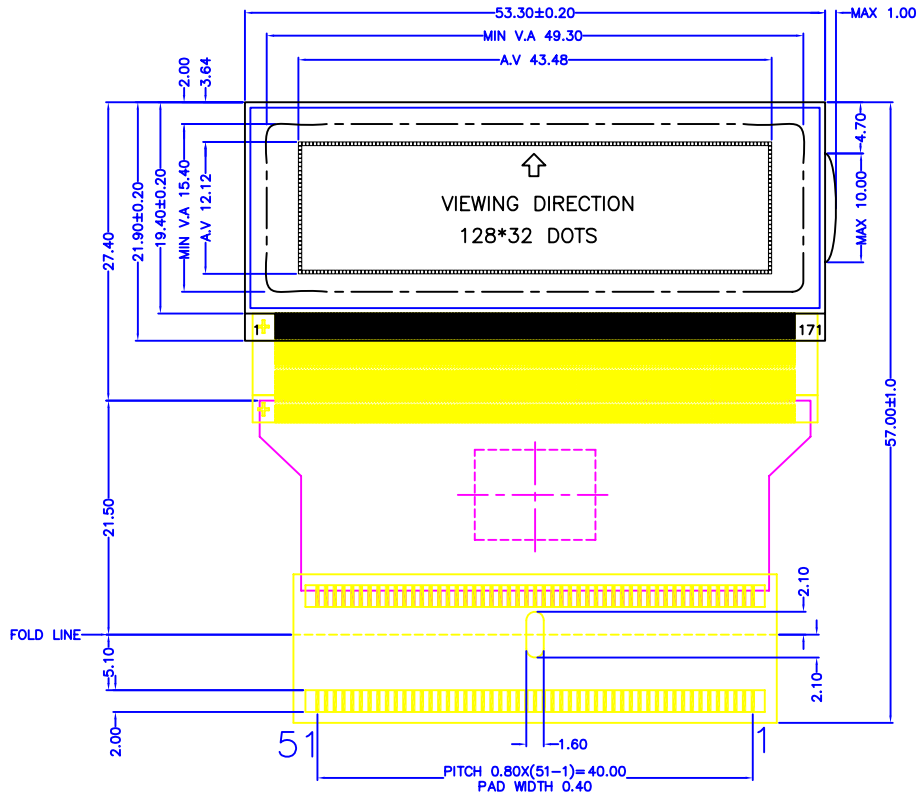

FPC弯折示意图
(出货时需弯折)

PIN	SYMBOL
1	NC
2	V5
3	V4
4	V3
5	V2
6	V1
7	VDD
8	M/S
9	RES
10	SCL
11	S1
12	P/S
13	CS1
14	CS2
15	C86
16	A0
17	WR
18	RD
19	VSS
20	DO
21	D1
22	D2
23	D3
24	D4
25	D5
26	D6
27	D7
28	DY0
29	CL0
30	SYNC
31	FR
32	CL
33	OSC2
34	OSCI
35	T2
36	T1
37	VSS
38	CAP1+
39	CAP1-
40	CAP2+
41	CAP2-
42	VOUT
43	V5
44	V4
45	VDD
46	V1
47	V2
48	V3
49	V4
50	V5
51	NC



SPECIFICATIONS

BACK POLARIZER : REFLECTIVE,ADHESIVE
 OPERATING TEMP : -10°C TO +60°C
 STORAGE TEMP : -20°C TO +70°C
 VIEWING DIRECTION : 6 O'CLOCK
 DRIVE CONDITION : 1/32 DUTY, 1/7 BIAS, Vdd=5V, Vop=9.75V
 DISPLAY MODE : STN, POSITIVE MODE(GREY)
 CUSTOMER P/N :
 CONNECTION: TAB


TOLERANCE	
>0~6 ±0.10	>120~300 ±0.50
>6~30 ±0.20	>300~500 ±0.80
>30~120 ±0.30	>500 ±1.20
// ⊥ ◎ ±0.10; ANGLE: ±3.0°	

REV: B	
SHEET: 1 OF 1	
SCALE: N.T.S.	UNITS MM
APPROVALS	
DWN	LGJ
CHK	
APP	
DATE Apr-11	



广州市龙宇电子有限公司
Kingtronics Display Technologies Ltd., Co.

DRAWING NO:
128326MOD



MODEL NUMBER :
KGT128326

DATE:
11-Apr-2005

DO NOT SCALE THIS DRAWING. PROJECTION