



BACKLIGHT CIRCUIT DIAGRAM

PIN ASSIGNMENT			
NO.	SYMBOL	NO.	SYMBOL
1	VLED+	26	G1
2	VLED+	27	G0
3	VLED-	28	R7
4	VLED-	29	R6
5	GND	30	R5
6	VCC	31	R4
7	VCC	32	R3
8	MODE	33	R2
9	DE	34	R1
10	VSYNC	35	R0
11	HSYNC	36	GND
12	B7	37	DCLK
13	B6	38	GND
14	B5	39	LR
15	B4	40	UD
16	B3	41	VCC
17	B2	42	VCC
18	B1	43	NC
19	B0	44	RESET
20	G7	45	NC
21	G6	46	NC
22	G5	47	DITHB
23	G4	48	GND
24	G3	49	NC
25	G2	50	NC

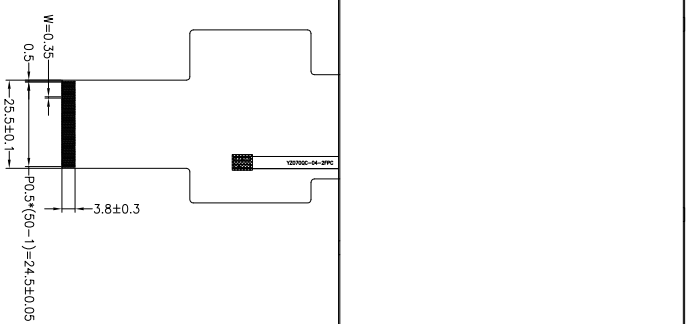

- NOTES:
1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY WHITE.
 2. OPERATING VOLTAGE: VCC=3.3V.
 3. VIEWING DIRECTION: FULL VIEWING ANGLE.
 4. IC DRIVER: HX8254+HX8664.
 5. OPERATING TEMP.: -20°C ~ 70°C.
 6. STORAGE TEMP.: -30°C ~ 80°C.
 7. SURFACE LUMINANCE:
 - A. If=225mA, BRIGHTNESS IS: 680cd/m²(TP)
 - B. If=250mA, BRIGHTNESS IS: 800cd/m²(TP)
 8. LED BACKLIGHT: 30-CHIP WHITE LED, If=225mA, Vf=9.2V.
 9. GENERAL TOLERANCE: ±0.2.
 9. ROHS COMPLIANT.

<https://www.displayfuture.com>

VER.	FIRST ISSUE	REVISER	DATE
01			2017.05.17

VER.	REVISER	DESCRIPTION

DRAWN BY: \ -		2017.05.17		VERSION NO: 01	
CHECKED BY:					
APPROVED BY:					
SCALE: 1/1		UNIT: mm		MODULE P/N: DF-TFN0695FW-M1	
DESCRIPTION: TFT MODULE					



Display Future Ltd.