

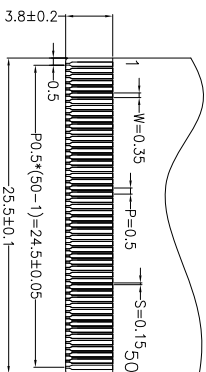


DEALE A
(SCALE 50:1)



DEALE B
(SCALE 5:1)

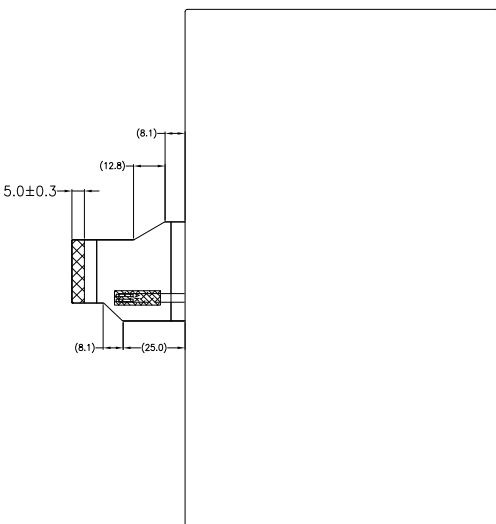

BACKLIGHT CIRCUIT DIAGRAM

PIN ASSIGNMENT		
NO.	SYMBOL	NO. SYMBOL
1	VLED_A	32 R3
2	VLED_A	33 R2
3	VLED_K	34 R1
4	VLED_K	35 R0
5	GND	36 GND
6	VCOM	37 DCLK
7	D/MD	38 GND
8	MODE	39 L/R
9	DE	40 U/D
10	VS	41 VGH
11	HS	42 VGL
12	B7	43 ANDD
13	B6	44 RESET
14	B5	45 NC
15	B4	46 VCOM
16	B3	47 DTHB
17	B2	48 GND
18	B1	49 NC
19	B0	50 NC
20	G7	
21	G6	
22	G5	
23	G4	
24	G3	
25	G2	
26	G1	
27	G0	
28	R7	
29	R6	
30	R5	
31	R4	

- NOTES:
1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY WHITE.
 2. OPERATING VOLTAGE: DVDD=3.3V.
 3. VIEWING DIRECTION: FULL VIEWING ANGLE.
 4. IC DRIVER: HX8664-B+HX8264-E.
 5. OPERATING TEMP.: -20°C ~ 70°C.
 6. STORAGE TEMP.: -30°C ~ 80°C.
 7. LED BACKLIGHT: 30-CHIP WHITE LED, If=200mA, Vf=9.6V.
 8. SURFACE LUMINANCE: 500CD/M²(TYP.).
 9. TOP POLARIZER SURFACE TREATMENT: O-FILM.
 10. GENERAL TOLERANCE: ±0.2mm.
 11. ROHS COMPLIANT.

<https://www.displayfuture.com>

VER.	REVISED DESCRIPTION
01	First Issue

REVISER	DATE
-	2017.10.18

		DRAWN BY:	2017.10.18	SCALE : 1/1	MODULE P/N:
		CHECKED BY:		UNIT: mm	DF-TFN0895FWA12
APPROVED BY:		VERSION NO:	01	DESCRIPTION: TFT MODULE	