
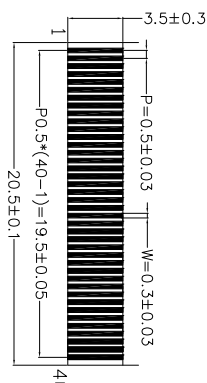


PIN	FUNCTION
1	VLED-
2	VLED+
3	GND
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	CLKIN
31	STRB
32	HSD
33	VSD
34	DEN
35	NC
36	GND
37	XR
38	YD
39	XL
40	YU



- NOTES:
1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY WHITE.
 2. OPERATING VOLTAGE: VDD=3.3V.
 3. VIEWING DIRECTION: 12 O'CLOCK.
 4. IC DRIVER: HX864B+HX8264D.
 5. OPERATING TEMP: -20°C ~ 70°C.
 6. STORAGE TEMP: -30°C ~ 80°C.
 7. LED BACKLIGHT: 20-CHIP WHITE LED, If=40mA, Vf=28V~34V.
 8. SURFACE LUMINANCE: 680cd/m²(TP.)
 9. TOP POLARIZER SURFACE TREATMENT: ANTI-GLARE.
 10. GENERAL TOLERANCE: ±0.2.
 11. ROHS COMPLIANT.

<https://www.displayfuture.com>

01	First Issue	2017.01.05	DATE
VER. REVISED DESCRIPTION			
DRAWN BY:		2017.01.05	SCALE : 1/1
CHECKED BY:			UNIT: mm
APPROVED BY:			
VERSION NO.:		01	
MODULE P/N:		DF-TFR0496FW-M1	
DESCRIPTION:		TFT & RTP MODULE	

