


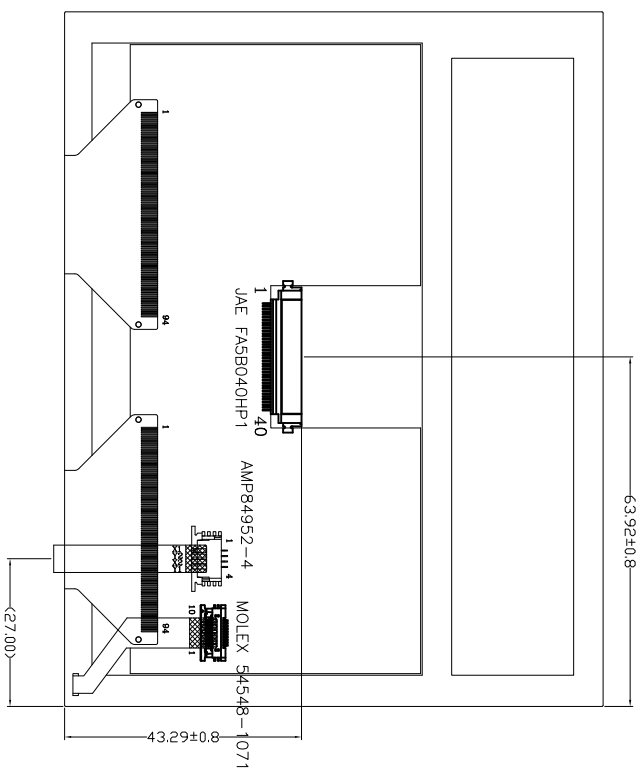


PIN DESCRIPTION

PIN NO	SYMBOL	DESCRIPTION
1	U/D	
2	NC	
3	HSYNC	
4	VLED	
5	VLED	
6	VLED	
7	VCC	
8	VSYNC	
9	DE	
10	X2	
11	Y1	
12	ADJ	
13	B5	
14	B4	
15	B3	
16	VSS	
17	B2	
18	B1	
19	B0	
20	VSS	
21	G5	
22	G4	
23	G3	
24	VSS	
25	G2	
26	G1	
27	G0	
28	VSS	
29	R5	
30	R4	
31	R3	
32	VSS	
33	R2	
34	R1	
35	R0	
36	X1	
37	Y2	
38	CLK	
39	VSS	
40	L/R	

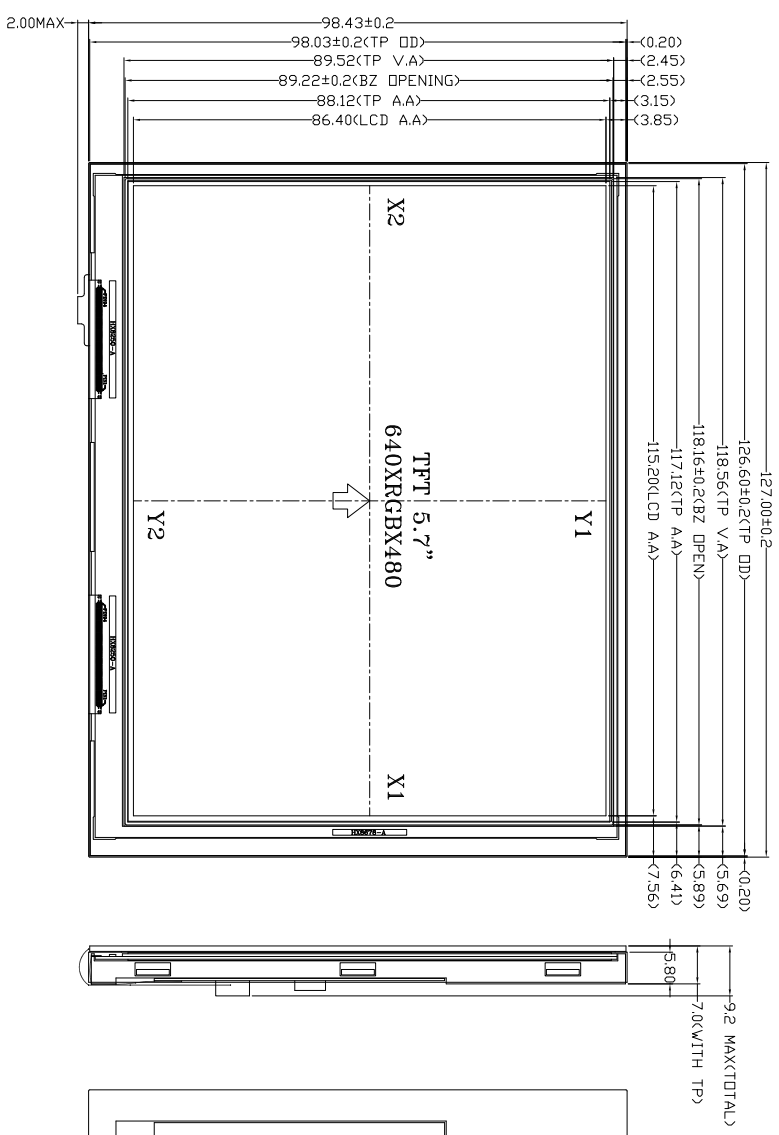

LED CIRCUIT DIAGRAM

- NOTES:
1. DISPLAY TYPE: TFT, TRANSMISSIVE, POSITIVE.
  2. OPERATING VOLTAGE: VDD=3.3V.
  3. VIEWING DIRECTION: 6 O'CLOCK.
  4. IC DRIVER: HIMAX.
  5. OPERATING TEMP: -20°C ~ 70°C.
  6. STORAGE TEMP: -30°C ~ 80°C.
  7. INTERFACE: 18-BIT RGB.
  8. SURFACE LUMINANCE: 530cd/m<sup>2</sup> (TYP).
  9. LED BACKLIGHT: 21-CHIP WHITE LED, If=140mA, Vf=9.6V.
  10. RECOMMENDED CUSHION ADHERENT AREA: TP V.A+1.6mm.
  11. GENERAL TOLERANCE: ±0.2.
  12. RoHS COMPLIANT.

<https://www.displayfuture.com>

01	FIRST ISSUE
VER.	REVISED DESCRIPTION
2014.11.20	DATE

		DRAWN BY:	2014.11.20	SCALE :	1/1	MODULE P/N:	DF-1TR0567FB-M1
		CHECKED BY:		UNIT:	mm	DESCRIPTION:	TFT MODULE
APPROVED BY:		VERSION NO:	01				