DF-CLN0393---L2

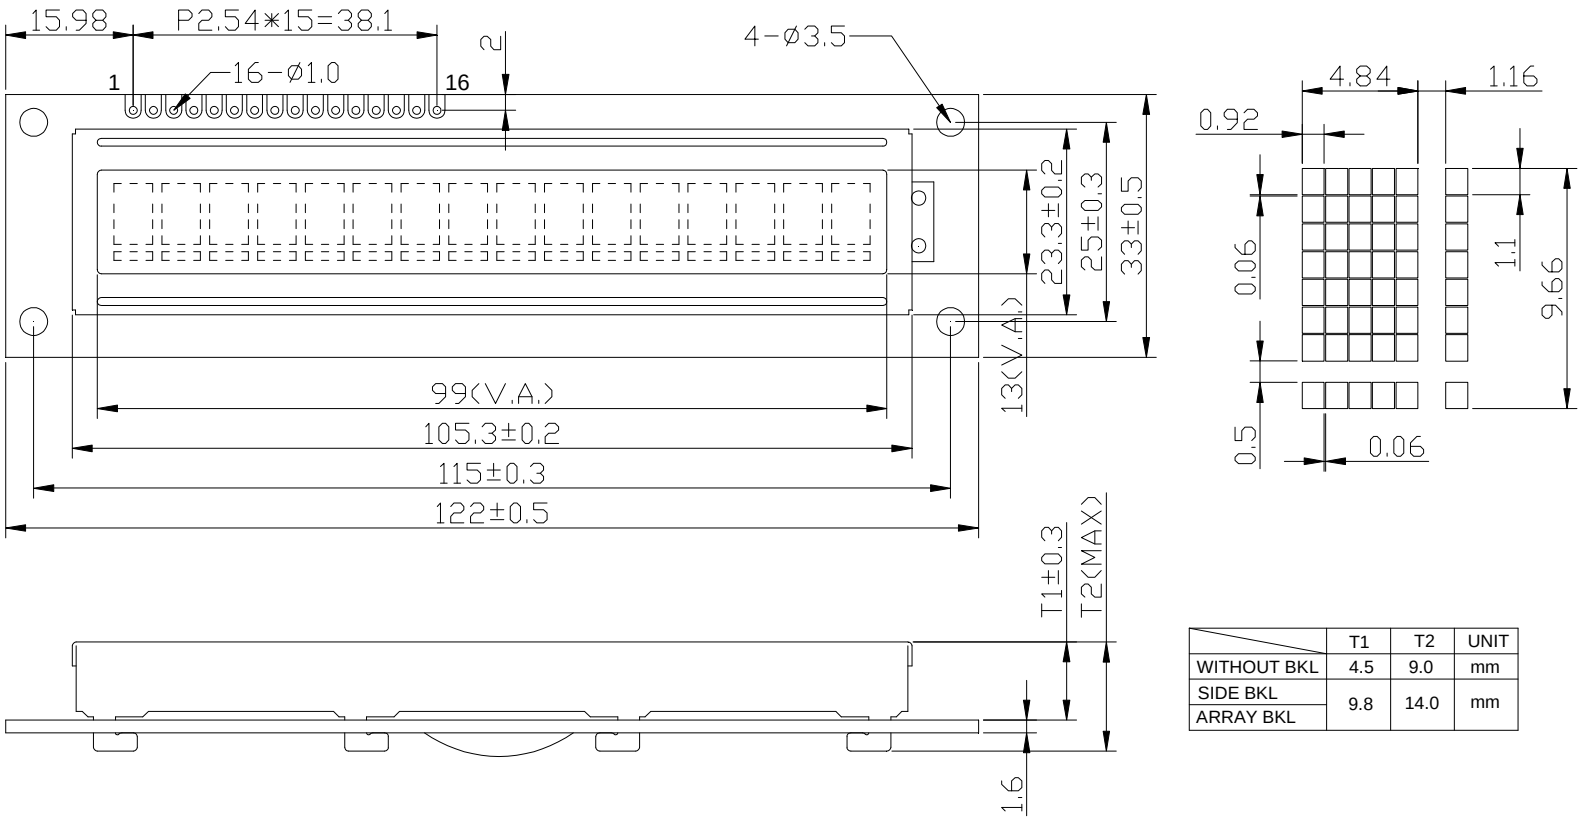

	T1	T2	UNIT
WITHOUT BKL	4.5	9.0	mm
SIDE BKL ARRAY BKL	9.8	14.0	mm

Feature

1. 16 Character x 1 line Character format; 5 x 7 dots + 1-Cursor line.
2.The LCD uses the SPLC780D Series LCD Driver from SUNPLUS ,or equivalent controller.
3.Interface With 4-bit or 8-bit MPU,1/16 Duty cycle,1/5Bias.
4.Display Mode & Backlight Variations.
5.ROHS compliant.

Pin connections

Pin no	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Symbol	VSS	VDD	V0	RS	RW	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	LED+	LED-