


DF-CLN0481---L1

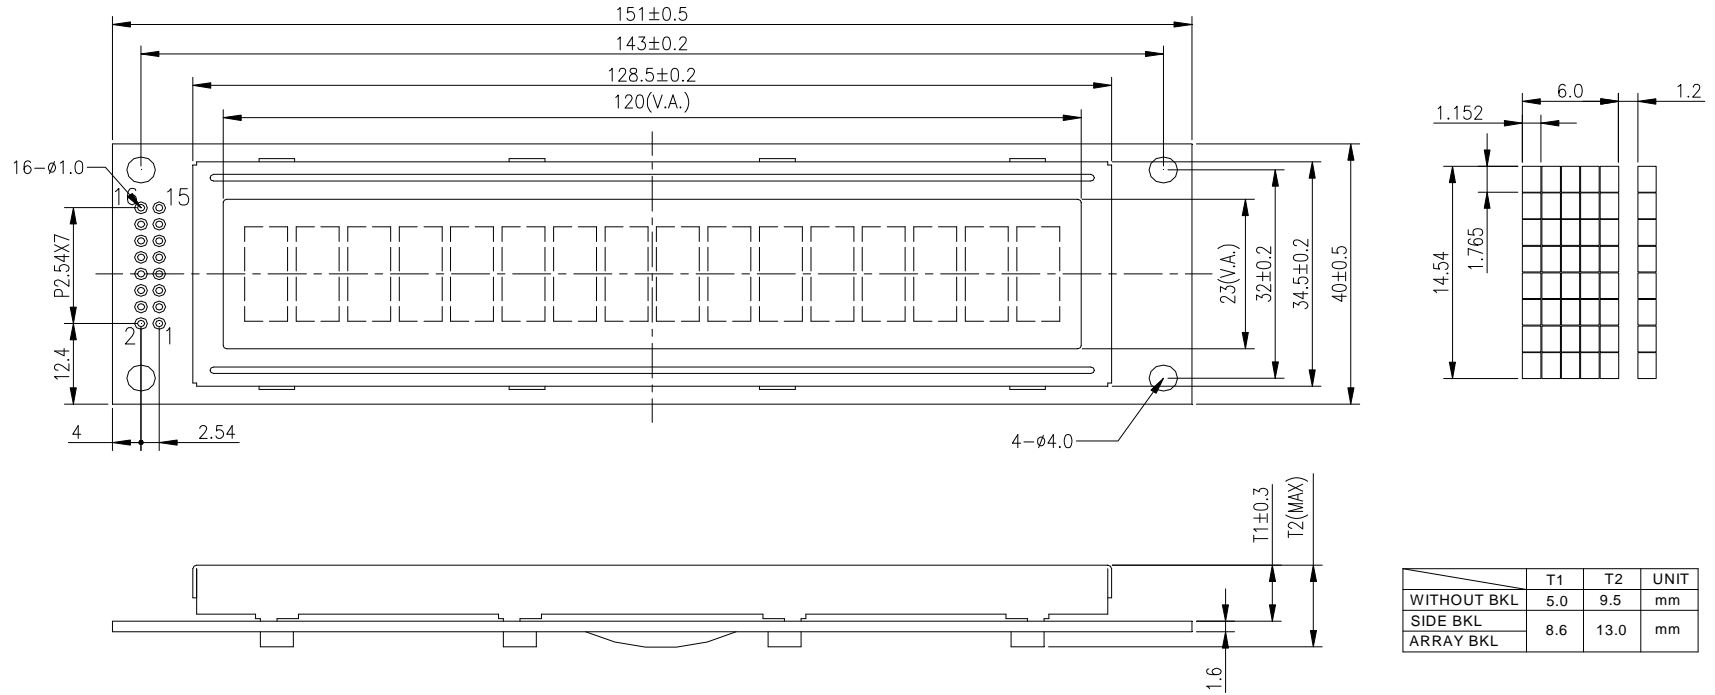

| | T1 | T2 | UNIT |
|-------------|-----|------|------|
| WITHOUT BKL | 5.0 | 9.5 | mm |
| SIDE BKL | 8.6 | 13.0 | mm |
| ARRAY BKL | | | |

Feature

- 16 Character x 1 line Character format; 5 x 7 dots + 1-Cursor line.
- The LCD uses the SPLC780D Series LCD Driver from SUNPLUS ,or equivalent controller.
- Interface With 4-bit or 8-bit MPU,1/16 Duty cycle,1/5Bias.
- Display Mode & Backlight Variations.
- ROHS compliant.

Pin connections

| Pin no | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 |
|--------|-----|-----|----|----|----|---|-----|-----|-----|-----|-----|-----|-----|-----|------|------|
| Symbol | VSS | VDD | V0 | RS | RW | E | DB0 | DB1 | DB2 | DB3 | DB4 | DB5 | DB6 | DB7 | LED+ | LED- |