

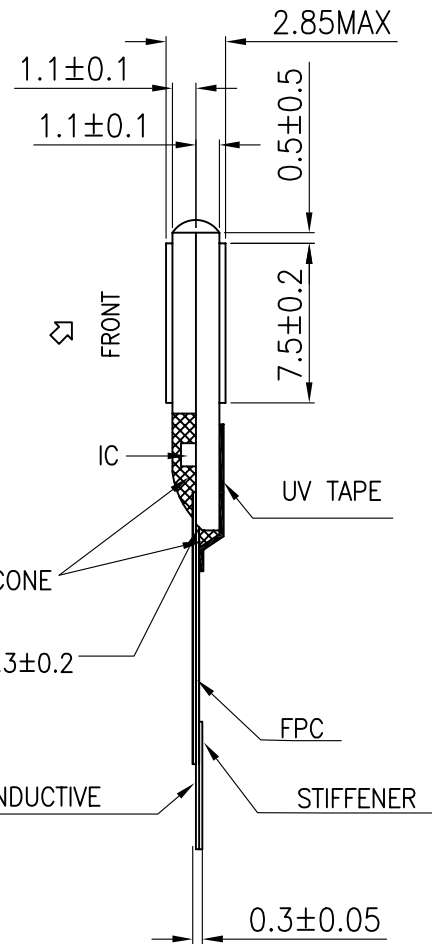


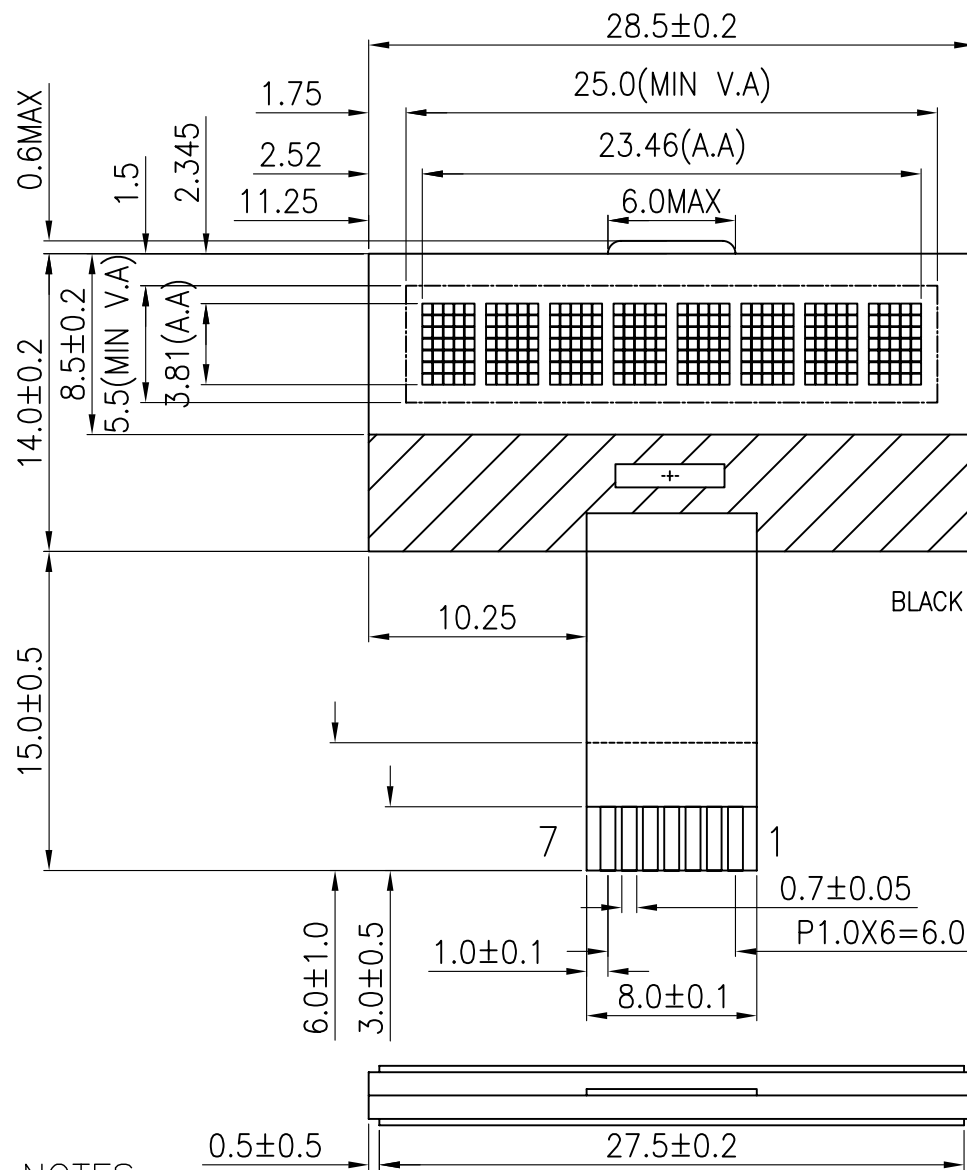

PIN CONNECTION:

PIN	FPC
1	SCL
2	SDA
3	VSS
4	VDD
5	VOUT
6	CAP1P
7	CAP1N

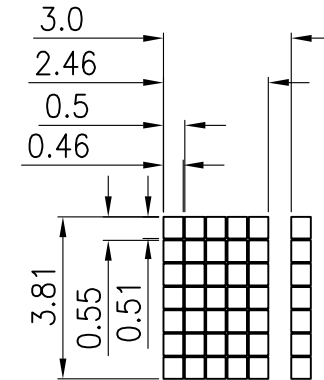

DISPLAY PATTERN

NOTES:

1. DISPLAY TYPE: TN,TRANSFLECTIVE/POSITIVE.
2. DRIVE METHOD: 1/9DUTY, 1/4BIAS, VOP=4.5V,VDD=3.3V.
3. VIEWING ANGLE: 6 O'CLOCK.
4. IC DRIVE:ST7032I
5. OPERATING TEMP: 0 TO 50°C.
6. STORAGE TEMP: -20 TO 60°C.
7. UNMARKED TOLERANCES IS ± 0.2 .
8. RoHS COMPLIANT.

02	更改FPC露金面 17/5-07
01	更改型号及增加标注公差16/5-07
VERSION	MODIFYCONTENT

CUSTOMER APVL		DATE	
DRAWN	SCALE	TITLE	MODULE
DFTG CHK	UNIT	MODEL	MI0801D-G
ENGR CHK	mm	DWG NO	02
APPROVAL		PAGE	1/4
MULTI-INNO TECHNOLOGY CO.,LTD.			