



NOTES:

- 7.0INCH PROJECTIVE CAPACITIVE TOUCH PANEL.
- OPERATING VOLTAGE: VDD=3.3V.
- COVER GLASS + SENSOR GLASS + FPCC.
- RESOLUTION: 1024 X 600 DOTS.
- IC DRIVER: FT5426 (SMT).
- MULTI FINGER: UP TO 10.
- HARDNESS OF COVER SURFACE: 7H.
- TRANSTTANCE: >=85%.
- ELECTRODES: 28 X 16.
- UV GLUE AROUND CHIP PINS.
- GROUNDING LAYERS ON BOTH SIDES OF FPCC.
- ITO PATTERN ON BOTH SIDES CAN NOT BE VISIBLE UNDER FRONT BRIGHTNESS.
- 0.5MM THICKNESS OF TINY COMPRESSIBLE GASKET.
- PROTECTIVE CIRCUITS AT INPUT SIGNALS LINES.
- PROTECTIVE FILMS ON FRONT AND BACK SIDES OF MODULE.
- OPERATION TEMP.: -30°C TO 70°C.
- STORAGE TEMP.: -30°C TO 80°C.
- GENERAL TOLERANCE: ±0.2.
- RoHS COMPLIANT.

FPC ASSIGNMENT:

1	VSS
2	VDD
3	SCL
4	NC
5	SDA
6	NC
7	/RST
8	NC
9	/INT
10	VSS

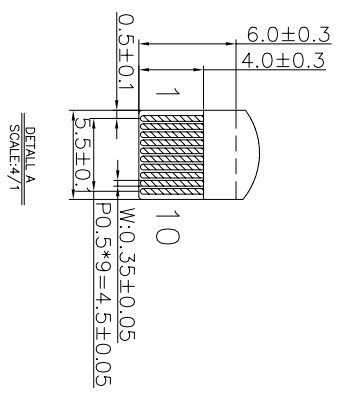

02	Update gasket from 3M 467 to 3M55256.	2016.03.01	2015.10.26	2015.10.26	02
01	FIRST ISSUE				
VER	REVISED DESCRIPTION	DATE	VERSION NO.		
DRAWN BY:		2015.10.26	SCALE : 1/1	MODULE P/N:	
CHECKED BY:			UNIT:	DF-SSC0705---M1	
APPROVED BY:				DESCRIPTION:	C/P MODULE