
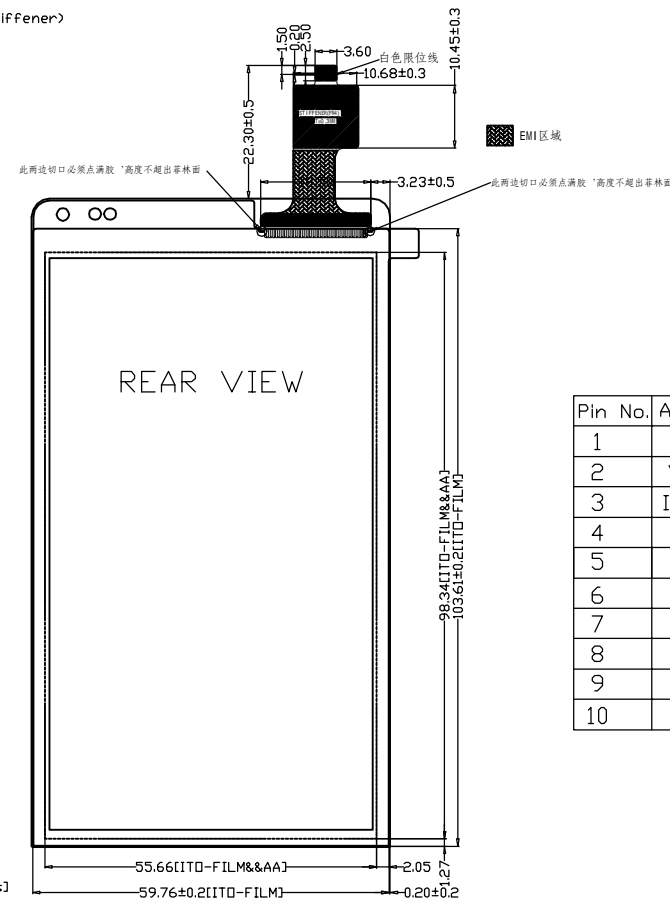


有害物质管理标准

■ 欧盟ROHS环保指令

□ 有害物质管理标准

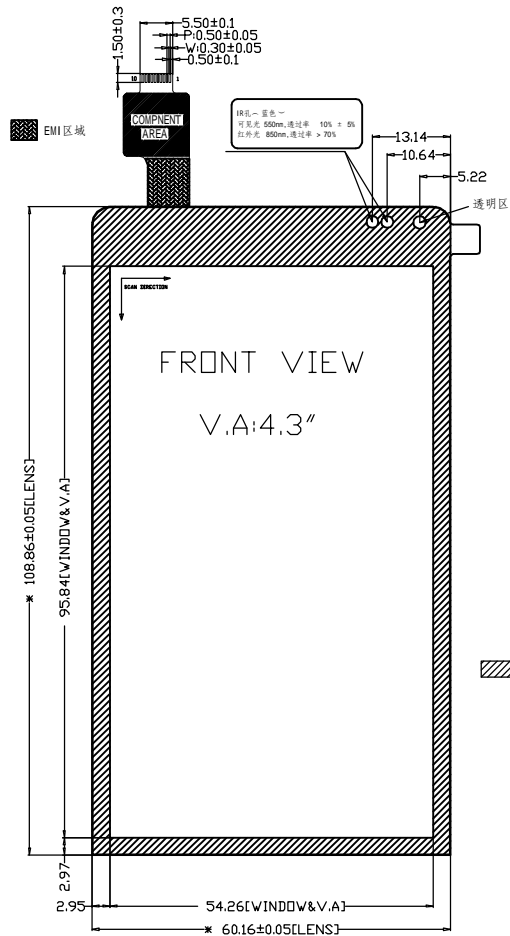

| Pin No. | Assignment  |
|---------|-------------|
| 1       | GND         |
| 2       | VDD<2.8V>   |
| 3       | IDVDD<1.8V> |
| 4       | SDA         |
| 5       | SCL         |
| 6       | INT         |
| 7       | RESET       |
| 8       | ID<IDVDD>   |
| 9       | NC          |
| 10      | GND         |

|   |  |
|---|--|
| 1 | OPERATING TEMP: -10°C~60°C                       |
| 2 | STORAGE TEMP : -20°C~70°C                        |
| 3 | GENERAL TOLERANCE: ±0.2                          |
| 4 | IC : FT6206                                      |
| 5 | THE GAP BETWEEN LCD AND CTP SHOULD BE OVER 0.6MM |
| 6 |  |
| 7 |  |

| CUSTOMER APVL                  |       | DATE        |     |
|--------------------------------|-------|-------------|-----|
| DRAWN                          | SCALE | TITLE       |     |
| DFTG CHK                       | UNIT  | MI0430CGP-C |     |
| ENGR CHK                       | mm    | MODEL       |     |
| APPROVAL                       |       | DWG NO      |     |
| MULTI-INNO TECHNOLOGY CO.,LTD. |       | PAGE        | 1/1 |